

RECESSED DOWNLIGHTS - SURFACE MOUNTED DOWNLIGHTS - RECESSED SPOTLIGHTS
SURFACE MOUNTED SPOTLIGHTS - PANEL LIGHTS - LINEAR LIGHTS - WALL LIGHTS
TRACK LIGHTS - RING LIGHTS - INGROUND LIGHTS - BOLLARD LIGHTS - ROAD LIGHTS
FLOOD LIGHTS - BATTEN LIGHTS - HIGHBAY LIGHTS - SUPERMARKET LIGHTS

METSAN



**COMMERCIAL
PRODUCT
GUIDE 25-26
XXV-XXVI / ۲۶-۲۵**

43
YEARS

Innovative Lighting Factory

Welcome to our latest lighting catalog! As the Board Members of Metsan Lighting, it's our pleasure to introduce you to a carefully created collection of our most innovative and energy-efficient lighting solutions for 'Commercial Lighting'. At Metsan Lighting, we are passionate about not just illuminating spaces, but transforming them creating environments that enhance both aesthetics and functionality.

For over 43 years, our team has been dedicated to pioneering cutting-edge technologies that meet the evolving needs of our clients, from residential to commercial spaces. Whether you're looking for timeless designs, smart lighting systems, or sustainable solutions, we've got something for every vision and every space.

Our commitment to excellence is reflected in every product we offer, and we are excited to continue providing you with reliable, sustainable, and beautiful lighting options. Thank you for choosing Metsan Lighting as your trusted partner in lighting.

We look forward to continuing to light the way forward, together.

Sincerely,

Sebaattin Kurtulan
Ibrahim Kurtulan



The product Indoor (INDOOR) category provides the professional product types between an superior quality and qualified performance.

- Project products proven by Metsan include high quality and long life time applied products
- Full indoor lighting model range to cover all applications and requirements
- Nominal life-time up to 50,000 h
- For Indoor category luminaires of protection class III
- Focused on high efficiency and top quality

METSAN
INDOOR



The product outdoor (OUTDOOR) category provides the professional product types between an top quality and qualified performance.

- Project products proven by Metsan include high quality and long life time applied products
- Outstanding outdoor lighting model range to cover all applications and requirements
- Nominal life-time up to 100,000 h
- Focused on high efficiency and superior quality

METSAN
OUTDOOR



The product prime (PRIME) category provides the product types between an top quality and qualified performance.

- Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor
- Provides the best compromise between an attractive price and qualified housing quality.
- Focus on high quality material
- Excellent finishes and product design
- Many body - case color option

METSAN
PRIME

Recessed Luminaires

Type	Model No	Product Name	P.N.	Type	Model No	Product Name	P.N.
Downlights	11010066	Fama 1''	25	Downlights	11060068	Agenor 6''	83
Downlights	11020066	Fama 2''	26	Downlights	11080068	Agenor 8''	84
Downlights	11030066	Fama 3''	27	Downlights	11020065	Renin 2''	87
Downlights	11040066	Fama 4''	28	Downlights	11030065	Renin 3''	88
Downlights	11050066	Fama 5''	29	Downlights	11040065	Renin 4''	89
Downlights	11060066	Fama 6''	30	Downlights	11050065	Renin 5''	90
Downlights	11080066	Fama 8''	31	Downlights	11060065	Renin 6''	91
Downlights	11030099	Monoblock 3''	35	Downlights	11080065	Renin 8''	92
Downlights	11040099	Monoblock 4''	36	Downlights	11020071R	Velar-R 2''	94
Downlights	11050099	Monoblock 5''	37	Downlights	11030071R	Velar-R 3''	95
Downlights	11060099	Monoblock 6''	38	Downlights	11040071R	Velar-R 4''	96
Downlights	11080099	Monoblock 8''	39	Downlights	11050071R	Velar-R 5''	97
Downlights	11020098	Yaren 2''	41	Downlights	11060071R	Velar-R 6''	98
Downlights	11030098	Yaren 3''	42	Downlights	11080071R	Velar-R 8''	99
Downlights	11040098	Yaren 4''	43	Downlights	11030167	Juno 3''	101
Downlights	11020095	Metsan 1982 2''	45	Downlights	11040167	Juno 4''	102
Downlights	11030095	Metsan 1982 3''	46	Downlights	11050167	Juno 5''	103
Downlights	11040095	Metsan 1982 4''	47	Downlights	11060167	Juno 6''	104
Downlights	11050095	Metsan 1982 5''	48	Downlights	11030367	Rhino 3''	105
Downlights	11060095	Metsan 1982 6''	49	Downlights	11050367	Rhino 5''	106
Downlights	11080095	Metsan 1982 8''	50	Downlights	11060367	Rhino 6''	107
Downlights	11010045	Dome 1''	52	Downlights	11020266	Denn 2''	109
Downlights	11020045	Dome 2''	53	Downlights	11030266	Denn 3''	110
Downlights	11030045	Dome 3''	54	Downlights	11040266	Denn 4''	111
Downlights	11040045	Dome 4''	55	Downlights	11050266	Denn 5''	112
Downlights	11050045	Dome 5''	56	Downlights	11060266	Denn 6''	113
Downlights	11060045	Dome 6''	57	Downlights	11080266	Denn 8''	114
Downlights	11080045	Dome 8''	58	Downlights	11020268	Galle 2''	116
Spotlights	12040032	Dome Spot 30	59	Downlights	11030268	Galle 3''	117
Downlights	11020047	Aprilla 2''	64	Downlights	11040268	Galle 4''	118
Downlights	11030047	Aprilla 3''	65	Downlights	11050268	Galle 5''	119
Downlights	11040047	Aprilla 4''	66	Downlights	11060268	Galle 6''	120
Downlights	11050047	Aprilla 5''	67	Downlights	11080268	Galle 8''	121
Downlights	11060047	Aprilla 6''	68	Spotlights	12080450	Veko	123
Downlights	11080047	Aprilla 8''	69	Spotlights	12080950	Verba	124
Downlights	11020092	Compact 2''	71	Spotlights	12081050	Versa	125
Downlights	11030092	Compact 3''	72	Spotlights	12020031	Valeri Fixed	126
Downlights	11040092	Compact 4''	73	Spotlights	12080850	Verfa	127
Downlights	11050092	Compact 5''	74	Spotlights	12020131	Valeri Basic Adjustable	128
Downlights	11060092	Compact 6''	75	Spotlights	12120131	Valeri Step Adjustable	129
Downlights	11080092	Compact 10''	76	Spotlights	12080750	Verfa Square	130
Spotlights	12020010	Compact Mini Basic	77	Spotlights	12040012	Verfa 4'' Adjustable	131
Downlights	11020068	Agenor 2''	79	Light Points	12002103	XS Mini Fixed	133
Downlights	11030068	Agenor 3''	80	Light Points	12002803	Sumota Mobil Spot	134
Downlights	11040068	Agenor 4''	81	Light Points	12002003	Mini Mobil	135
Downlights	11050068	Agenor 5''	82	Light Points	12002004	Mini Mobil Square	136



Metsan, depending on the brands used, can extend product warranty up to 5 years. For further information please visit our website: www.metsanlighting.com

*Metsan kullandığı markalara göre garanti süresini 5 seneye kadar uzatmaktadır. Detaylı bilgi için ziyaret ediniz: www.metsanlighting.com

CATEGORICAL INDEX

INDOOR

Type	Model No	Product Name	P.N.	Type	Model No	Product Name	P.N.
Light Points	12002204	Mini Mobil Square Double	137	Spotlights	12030037	Kanat Square	199
Light Points	12002304	Mini Mobil Square Trio	138	Spotlights	12030069	Cuba Square	200
Spotlights	12020057	Eleni Fixed	140	Spotlights	12001050	Zara Single Adjustable	201
Spotlights	12020127	Eleni Reflector	141	Spotlights	12030097	Sophia 3"	203
Spotlights	12020127A	Eleni V2 Reflector	142	Spotlights	12040051	Sophia Deep 4"	204
Spotlights	12020061	Eleni Deep Lens	143	Spotlights	12040031	Bonatti Round Single	208
Spotlights	12020059	Eleni Deep Reflector	144	Spotlights	12040042	Bonatti Round Double	209
Spotlights	12020013	Neptune Single	147	Spotlights	12040043	Bonatti Square Single	210
Spotlights	12020014	Neptune Double	148	Spotlights	12040044	Bonatti Square Double	211
Spotlights	12020015	Neptune Trio	149	Spotlights	12040059	Lorenzo 30 Recessed	223
Spotlights	12030017	Royal Round	150	Spotlights	12040021	Norse Round	230
Spotlights	12030018	Royal Round Double	151	Spotlights	12040037	Norse Deep Fixed	232
Spotlights	12030043	Royal Square	152	Spotlights	12050013	Norse Round Adjustable	234
Spotlights	12030044	Royal Square Double	153	Spotlights	12050041	Norse Round Single Removable	236
Spotlights	12030045	Royal Square Trio	154	Spotlights	12050012	Norse Round Double Adjustable	238
Spotlights	12030021	Aries Round	155	Spotlights	12050026	Norse Round Trio Adjustable	240
Spotlights	12030020	Aries Square	156	Spotlights	12040022	Norse Square	242
Spotlights	120827111	Luxis Single	158	Spotlights	12050011	Norse Square Deep	244
Spotlights	120827112	Luxis Double	159	Spotlights	12050015	Norse Square Adjustable	246
Spotlights	120827113	Luxis Trio	160	Spotlights	12050024	Norse Square Double Adjustable	248
Trimless Spotlights	120827121	Luxis Trimless Single	161	Spotlights	12050025	Norse Square Trio Adjustable	250
Trimless Spotlights	120827122	Luxis Trimless Double	162	Spotlights	12060015	Dolis Fixed	257
Trimless Spotlights	120827123	Luxis Trimless Trio	163	Spotlights	12080035	Dolis 8" Fixed	259
Spotlights	12030031	Binno Round Single	165	Spotlights	12060013	Dolis Adjustable	261
Spotlights	12030032	Binno Round Double	166	Semi Recessed Spotlights	11906019	Dolis Semi Recessed	263
Spotlights	12030033	Binno Round Trio	167	Spotlights	120828131	Nevron Midi Single	271
Spotlights	12030034	Binno Square Single	168	Spotlights	120828132	Nevron Midi Double	273
Spotlights	12030035	Binno Square Double	169	Spotlights	120829131	Nevron Single	275
Spotlights	12030036	Binno Square Trio	170	Spotlights	120829132	Nevron Double	277
Spotlights	12050020	Zoom 5" Adjustable	172	Spotlights	120829133	Nevron Trio	279
Spotlights	11900022	Zoom Recessed	173	Trimless Spotlights	120830131	Nevron Trimless Single	281
Trimless Spotlights	12020171	Zoom Fixed Trimless	174	Trimless Spotlights	120830132	Nevron Trimless Double	283
Trimless Spotlights	12020071	Zoom Adjustable Trimless	175	Spotlights	12040046	Shell Midi Spot Recessed	289
Spotlights	12020022	Alyes 2"	182	Semi Recessed Spotlights	11900034	Shell Midi Semi Recessed	290
Spotlights	12030013	Alyes 3"	183	Panel Lights	14011212	Lotus Recessed 12x12	371
Spotlights	12050038	Alyes 5"	184	Panel Lights	14011818	Lotus Recessed 18x18	372
Spotlights	12080022	Alyes 8"	185	T-Bar Panel Lights	14213060	Lotus T-Bar 30x60	378
Spotlights	12030014	Alyes Square 3"	186	T-Bar Panel Lights	14213120	Lotus T-Bar 30x120	379
Pinhole Spotlights	12020013A	Pinhole/A Spot	190	T-Bar Panel Lights	14216120	Lotus T-Bar 60x120	380
Pinhole Spotlights	12020013B	Pinhole/B Spot	191	T-Bar Panel Lights	14216060	Lotus T-Bar 60x60	382
Pinhole Spotlights	12020013D	Pinhole/D Spot	192	Clip-in Panel Lights	14116060	Lotus Clip-in 60x60	381
Pinhole Spotlights	12020013E	Pinhole/E Spot	193	T-Bar Panel Lights	14216060	Lotus T-Bar 60x60	382
Spotlights	12080602	Ivy V2	194	T-Bar Panel Lights	24216060	Lotus Segment T-Bar 60x60	383
Spotlights	12020060	Sumota Mini	195	T-Bar Panel Lights	142126060	Lotus Y T-Bar 60x60	384
Spotlights	12020069	Wall Washer Spot	196	Clip-in Panel Lights	141126060	Lotus Y Clip-in 60x60	385
Spotlights	12030068	Toscana Square	197	Steril Panel Lights	14116060	Lotus Steril 60x60	387
Spotlights	12030071	Sagra Square	198				

CATEGORICAL INDEX

INDOOR

Surface Mounted Luminaires

Track Mounted Luminaires

Type	Model No	Product Name	P.N.	Type	Model No	Product Name	P.N.
Downlights	13025066	Fama 8" Surface	32	Track Spotlights	12500111	Zoom Track	180
Downlights	13012540	Dome Surface 4"	61	Track Spotlights	12500188	Bonatti 10 Track Mini	212
Downlights	13029250	Dome Surface 8"	62	Track Spotlights	12500134	Bonatti 10 Track	213
Downlights	13080068	Agenor 8" Surface	85	Track Spotlights	12500136	Bonatti 30 Track	214
Spotlights	13009088	Eleni Reflector Surface	145	Track Spotlights	12500189	Bonatti Track 30 IT	216
Spotlights	13006011	Zoom Surface	176	Track Spotlights	12500142	Bonatti 30 Box D	218
Spotlights	13006070	Zoom Adjustable Surface	177	Track Spotlights	12500145	Bonatti 30 Box L	220
Spotlights	13006093	Zoom Adjustable Surface V2	178	Track Spotlights	12500199	Lorenzo Track 30 IT	226
Spotlights	13006011K	Zoom Square Surface	179	Track Spotlights	12501100	Lorenzo Track 30	227
Spotlights	13010025	Alyes Surface 2"	187	Track Spotlights	12501101	Lorenzo Track 30 D	228
Spotlights	13010026	Alyes Surface 3"	188	Track Spotlights	12500117	Dolis-D	265
Spotlights	13010073	Sophia 100 Surface	205	Track Spotlights	12500118	Dolis-L	267
Spotlights	13012589	Sophia 125 Surface	206	Track Spotlights	12503166	Shell Midi D	286
Spotlights	13009080	Lorenzo 30 Surface	224	Track Spotlights	12502166	Shell Midi Y	287
Spotlights	12609080	Lorenzo 30 Surface Adjustable	225	Track Spotlights	12500166	Shell Midi IT	288
Spotlights	13040021	Norse Surface	252	Track Spotlights	12510177	Coffee Lens Track	302
Spotlights	13012617	Norse Surface Adjustable	254	Track Spotlights	12500178	Narrowo 30 Track	303
Downlights	13010019	Spectral 100	292	Track Spotlights	12500125	Kray-L	304
Downlights	13012620	Spectral 126	293	Track Spotlights	12500164	Nergis 30	306
Downlights	13015021	Spectral 150	294	Track Spotlights	12500264	Nergis 30 IT	307
Downlights	13020062	Spectral 200	295	Track Linear Lights	13438001	Lehman 38 Track	318
Downlights	13020063	Spectral Rad-Em 200	296	Track Linear Lights	13456001	Lehman 56 Track	328
Downlights	13035063	Spectral 350	298	Track Linear Lights	13700164	Seko Linear Track V1	157
Downlights	13050064	Spectral 500	299	Track Linear Lights	13700364	Seko Linear Track V3	359
Spotlights	13010011K	Kutba Single Surface	300	Track Linear Lights	13700464	Seko Linear Track V4 Adjustable	361
Spotlights	13010031K	Kutba Double Surface	301	Track Linear Lights	13700174	Seko Track L1	363
Panel Lights	14311818	Lotus Surface 18x18	373	Track Linear Lights	13700274	Seko Track L2	364
Panel Lights	14312222	Lotus Surface 22x22	374	Track Linear Lights	13700175	Seko Track R1	363
Panel Lights	14312424	Lotus Surface 24x24	375	Track Linear Lights	13700275	Seko Track R2	366
Panel Lights	14313030	Lotus Surface 30x30	376	Track Linear Lights	13701164	Seko Linear Track V1 Adjustable	368
Panel Lights	14316060	Lotus Surface 60x60	377				

CATEGORICAL INDEX

INDOOR

Light Channel Systems

Type	Model No	Product Name	P.N.
Profiles	15500967	Unico Led Bar	413
Flexible Leds	15500750	X60 Strip Led	414

Track Systems

Type	Model No	Product Name	P.N.
Monophase	19800001	Monophase Track	308
Monophase	19800002	Monophase Straight Connector	308
Monophase	19800003	Monophase Energy Socket	308
Monophase	19800004	Monophase L Connector (90°)	308
Monophase	19800005	Monophase T Connector	309
Monophase	19800006	Monophase X Connector	309
Monophase	19800018	Monophase Adjustable Connector	309
Monophase	19800019	Monophase End Cap	309
Triphase	19800007	Triphase Track	310
Triphase	19800011	Triphase Energy Socket	310
Triphase	19800009	Triphase Long Type Connector	310
Triphase	19800014	Triphase L Connector (90°)	310
Triphase	19800015	Triphase Adjustable Connector	311
Triphase	19800031	Triphase T Connector	311
DALI	19800023	Dali Track	
DALI	19800011	Dali Energy Socket	
DALI	19800025	Dali Long Type Connector	
DALI	19800029	Dali L Connector (90°)	
DALI	19800028	Dali Adjustable Connector	
DALI	19800040	Dali T Connector	
DALI	19800041	Dali X Connector	
DALI	19800028	Dali Adjustable Connector	

Wall Mounted Luminaires

Type	Model No	Product Name	P.N.
Surface Mounted Lights	16100026	Speky Wall	406
Surface Mounted Lights	16100021	Fumany Wall	407
Surface Mounted Lights	16100013	Valar 100	408
Surface Mounted Lights	16126014	Valar 126	410
Surface Mounted Lights	16126015	Valar 126 Duo	411
Mirror Lights	15500155	Selimo	412
Under Cabinet Lights	15500103	Vekal Kitchen	415
Under Cabinet Lights	15500102	Cabino Double Socket	416
Mirror Lights	15400001	Mirror Light V1	417
Mirror Lights	15400002	Mirror Light V2	418
Recessed Lights	12600001	Step Light 01	419
Recessed Lights	18700002	Bedside Recessed V1	421
Surface Mounted Lights	16120550	Run 550 Up&Down	422
Surface Mounted Lights	16110098	Hena Bed Head	423

48V Luminaires

Type	Model No	Product Name	P.N.
Track Spotlights	16600105	Magneco F6	360
Track Spotlights	16600106	Magneco F12	361
Track Spotlights	16600107	Magneco F18	362
Track Spotlights	16600110	Magneco A6	363
Track Spotlights	16600111	Magneco A12	364
Track Spotlights	16600112	Magneco A18	365
Track Spotlights	16600120	Magneco L12	366
Track Spotlights	16600121	Magneco L24	367
Track Spotlights	16600130	Magneco R15	368
Track Spotlights	16600001	Magneco Track	369
Track Spotlights	16600005	Magneco Trimless Track	369
Track Spotlights	16600002	Magneco Driver 60W	370
Track Spotlights	16600003	Magneco Driver 100W	370
Track Spotlights	16600004	Magneco Driver 200W	371
Track Spotlights	16600103	Magneco External Driver Connector	371
Track Spotlights	16600102	Magneco Adjustable Corner Connector	372
Track Spotlights	16600103	Magneco Straight Connector	372
Track Spotlights	16600104	Magneco End Cap	373

Linear Luminaires

Type	Model No	Product Name	P.N.
Surface Mounted	13538001	Lehman 38 Surface	317
Recessed Linear Lights	13656001	Lehman 56 Recessed	320
Recessed Linear Lights	13456001	Lehman 56 Trimless	322
Surface Mounted & Suspended Linear Lights	13556001	Lehman 56 Surface	324
Wall Mounted Linear Lights	13556101	Lehman 56 Wall	326
Surface Mounted & Suspended Linear Lights	13556020	Lehman 56 Deep Surface	330
Recessed Linear Lights	13686001	Lehman 86 Recessed	332
Surface Mounted & Suspended Linear Lights	13586001	Lehman 86 Surface	334
Recessed Linear Lights	13546002	Vog 46 Surface	343
Surface Mounted & Suspended Linear Lights	13556002	Vog 56 Surface	345
Square & Rectangle Lights	13586002	Vog 86 Surface	347
Surface Mounted & Suspended Linear Lights	13556004	Renga 56 Surface	349
Surface Mounted & Suspended Linear Lights	13586004	Renga 86 Surface	351
Surface Mounted & Suspended Linear Lights	13586005	Monolit 86 Surface	353
Surface Mounted & Suspended Linear Lights	13586006	Duet 86 Surface	354

CATEGORICAL INDEX

OUTDOOR

Pole Mounted Luminaires

Type	Model No	Product Name	P.N.
Road Lighting	15100111	Pedro 80	443
Road Lighting	15100112	Pedro 120	445
Road Lighting	15100113	Pedro 200	447

Wall Mounted Luminaires

Type	Model No	Product Name	P.N.
Bulkhead	13100016	Buno IP65 Surface	427
Bulkhead	13100017	Buno V2 IP65 Surface	428
Bulkhead	13100018	Buno V3 IP65 Surface	429
Wall Lights	165009029	Numa Wall Single	462
Wall Lights	165009028	Numa Wall Duo	463

Surface Mounted Luminaires

Type	Model No	Product Name	P.N.
Wall Mounted Luminaires	15000107	Atlantic 50	431
Floodlight	15000108	Atlantic 100	433
Floodlight	15000109	Atlantic 150	435
Floodlight	15000110	Atlantic 200	437
Floodlight	15000111	Atlantic 300	439
Floodlight	15700001	Wavela	459

Garden Lights

Type	Model No	Product Name	P.N.
Garden Lights	16500008	Luceva Spike	460
Garden Lights	16500009	Luceva Surface	461

High-Bay Luminaires

Type	Model No	Product Name	P.N.
High-Bay	14800010	Goba High-bay	449
High-Bay	14800027	Aluba Round High-Bay	450
High-Bay	14800011	Obu High-bay	451
High-Bay	14700017	Forza V2 Linear High-bay	452
High-Bay	14800019	Foscano High-bay	454

In-Ground Lights

Type	Model No	Product Name	P.N.
In-Ground Lights	17400005	Impact Mini In-Ground	465
In-Ground Lights	17400006	Impact Midi In-Ground	466
In-Ground Lights	17400007	Impact Maxi In-Ground	467
In-Ground Lights	17400109	Mushroom In-Ground One Way	469
In-Ground Lights	17400209	Mushroom In-Ground Two Way	469
In-Ground Lights	17400409	Mushroom In-Ground Four Way	469
In-Ground Lights	17400010	Arteko	470

Batten Lights

Type	Model No	Product Name	P.N.
Batten Lights	15000054	Rainer Aluminium Batten	456
Batten Lights	15000044	Rainer Polycarbon Batten	457
Batten Lights	15000084	ExProof Polycarbon Batten	458

Bollard Lights

Type	Model No	Product Name	P.N.
Bollard Lights	16500027	Enza L Single	474
Bollard Lights	16500028	Enza L Double	476
Bollard Lights	16500030	Enza V Double	478
Bollard Lights	16500026	Enza U	480
Bollard Lights	16300012	Zigzag Decorative	484

Recessed Luminaires

Type	Model No	Product Name	P.N.	Type	Model No	Product Name	P.N.
Gu10 Spotlights	10520060	Sumota Mini	489	Gu10 Spotlights	10583602	Electra Double	506
Gu10 Spotlights	10520075	Sumota Square	489	Gu10 Spotlights	10584800	Epsilon	506
Gu10 Spotlights	10581601	Sumota Deep	489	Gu10 Spotlights	10584802	Epsilon Double	506
Gu10 Spotlights	10530103	Sumota Adjustable	489	Gu10 Spotlights	10585800	Venus	506
Gu10 Spotlights	10530109	Sumota Square Adjustable	490	Gu10 Spotlights	10581601	Draco Fixed	507
Gu10 Spotlights	10580950	Verba	491	Gu10 Spotlights	10581621	Draco Double Fixed	507
Gu10 Spotlights	10580950	Verba	491	Gu10 Spotlights	10581631	Draco Trio Fixed	507
Gu10 Spotlights	10581050	Versa	491	Gu10 Spotlights	10585801	Venus Fixed	507
Gu10 Spotlights	10580850	Verfa	491	Gu10 Spotlights	10585821	Venus Double Fixed	508
Gu10 Spotlights	10580851	Verfa Adjustable	491	Gu10 Spotlights	10585831	Venus Trio Fixed	509
Gu10 Spotlights	10580750	Verfa Square	492	Gu10 Spotlights	10582601	Leo Fixed	509
Gu10 Spotlights	10580750	Verfa Square Adjustable	492	Gu10 Spotlights	10582621	Leo Double Fixed	509
Gu10 Spotlights	10581350	Versa 3" Round	492	Gu10 Spotlights	10582631	Leo Trio Fixed	509
Gu10 Spotlights	10581352	Versa 3" Round Double	492	Gu10 Spotlights	10584801	Epsilon Fixed	509
Gu10 Spotlights	10581150	Valeri Basic Adjustable	493	Gu10 Spotlights	10584821	Epsilon Double Fixed	509
Gu10 Spotlights	10581151	Valeri Step Adjustable	493	Gu10 Spotlights	10584831	Epsilon Trio Fixed	509
Gu10 Spotlights	10520010	Compact Mini Basic	493	Gu10 Spotlights	10583601	Electra Fixed	510
Gu10 Spotlights	10580450	Veko	493	Gu10 Spotlights	10583621	Electra Double Fixed	510
Gu10 Spotlights	10520057	Eleni Fixed	494	Gu10 Spotlights	10583631	Electra Trio Fixed	510
Gu10 Spotlights	10594060	Azer Square	494	Gu10 Spotlights	10586800	Dorado	510
Gu10 Spotlights	10594062	Azer Square Double	494	Gu10 Spotlights	10586801	Dorado Fixed	511
Gu10 Spotlights	10594063	Azer Square Trio	494	Gu10 Spotlights	10586821	Dorado Double Fixed	511
Gu10 Spotlights	10592001	Hefta Adjustable	495	Gu10 Spotlights	10586831	Dorado Trio Fixed	511
Led Engine	12005045	ModuLed RF45	495	Gu10 Spotlights	10501001	Big Pluton	512
Gu10 Spotlights	10520127	Eleni Flat	496	Gu10 Spotlights	10501104	Italian Pluton	512
Gu10 Spotlights	10520078	Aprilla 2" Gu10	496	Gu10 Spotlights	10570503	Crystal Square	512
Gu10 Spotlights	10580602	Ivy V2	496	Gu10 Spotlights	10570515	Crystal Round	512
Gu10 Spotlights	10580603	Ivy V2 Adjustable	497	Gu10 Spotlights	10557407	Zamak Square	512
Gu10 Spotlights	10585701	Velar Mini	497	Gu10 Spotlights	10590021	Zamak Round	512
Gu10 Spotlights	10520013A	Pinhole/A	497	Gu10 Spotlights	10590000	Tango Round	516
Gu10 Spotlights	10501050	Zara Single Adjustable	497	Gu10 Spotlights	10590001	Tango Square	516
Gu10 Spotlights	10501051	Zara Double Adjustable	498	Gu10 Spotlights	10590021	Tango Square Double	516
Gu10 Spotlights	10585101	Solid Single Fixed	498	Gu10 Spotlights	10590003	Tango V2	516
Gu10 Spotlights	10585201	Solid Single Adjustable	499	Gu10 Spotlights	10590010	Tango Ganna Round	517
Gu10 Spotlights	10585602	Solid Double Adjustable	499	Gu10 Spotlights	10590011	Tango Ganna Square	517
Gu10 Spotlights	10581154	Strada Basic Adjustable	499	Gu10 Spotlights	10590211	Tango Ganna Square Double	517
Gu10 Spotlights	10581155	Strada Step Adjustable	499	Gu10 Spotlights	10590012	Tango Ganna V2	517
Gu10 Spotlights	10581262	Veito Double Basic Adjustable	500	Gu10 Spotlights	10592100	Hefta Tango	518
Gu10 Spotlights	10581258	Cairo Basic Adjustable	500	Gu10 Spotlights	10581051	Versa Tango	519
Gu10 Spotlights	10581260	Cairo Double Basic Adjustable	501	Gu10 Spotlights	10588080	Tango Big	520
Gu10 Spotlights	20500131	Derely Adjustable WT	503	Gu10 Spotlights	10520053	Reflecto Round 70	523
Gu10 Spotlights	20500142	Derely Adjustable BK	503	Gu10 Spotlights	10520066	Reflecto Round 70 V2	523
Gu10 Spotlights	10581600	Draco	505	Gu10 Spotlights	10520066	Reflecto Square 70 V2	523
Gu10 Spotlights	10582600	Leo	505	Gu10 Spotlights	10579070	Reflecto Square 70	524
Gu10 Spotlights	10582602	Leo Double	505	Gu10 Spotlights	10579270	Reflecto Square 70 Double	524
Gu10 Spotlights	10583600	Electra	505	Gu10 Spotlights	10579370	Reflecto Square 70 Trio	524

Track Mounted Luminaires

Type	Model No	Product Name	P.N.	Type	Model No	Product Name	P.N.
Gu10 Spotlights	10579370	Reflecto Square 70 Trio	524	Gu10 Spotlights	12500144	Loven Track	532
Gu10 Spotlights	10578170	Reflecto Square 70-Y	525	Gu10 Spotlights	12594060	Nelson 60 Track	534
Gu10 Spotlights	10578270	Reflecto Square Double 70-Y	525	Gu10 Spotlights	12500137	Messe Track V1	546
Gu10 Spotlights	10578370	Reflecto Square Trio 70-Y	525	Gu10 Spotlights	12500179	Messe Track V3	546
Gu10 Spotlights	10579090	Reflecto Square 90	525	Gu10 Spotlights	12500177	Coffee Track	546
Gu10 Spotlights	10579290	Reflecto Square Double 90	526	Gu10 Spotlights	12500157	Reflecto V2 Gu10 Track	546
Gu10 Spotlights	10578090	Reflecto Square 90-Y	526				
Gu10 Spotlights	10578290	Reflecto Square Double 90-Y	529				
Gu10 Spotlights	10579110	Reflecto Square 110	526				
Gu10 Spotlights	10580250	Verfa Trimless	527				
Gu10 Spotlights	10520067	Reflecto Round 70 Trimless	527				
Gu10 Spotlights	105827121	Luxis Trimless Single	527				
Gu10 Spotlights	105827122	Luxis Trimless Double	528				
Gu10 Spotlights	10520060	Sumota Mini IP65	529				
Gu10 Spotlights	10580850	Verfa IP65	529				
Gu10 Spotlights	10514460	Loven Semi Recessed	532				

Wall Mounted Luminaires

Type	Model No	Product Name	P.N.
Gu10 Spotlights	16132060	Nelson 60 Single Wall	534
Gu10 Spotlights	16132260	Nelson 60 Double Wall	535
Gu10 Spotlights	16005520	Messe Mini Wall	544
Gu10 Spotlights	16005524	Messe Double Wall	544

Surface Mounted Luminaires

Type	Model No	Product Name	P.N.
Gu10 Spotlights	13012160	Loven Square Surface	531
Gu10 Spotlights	13012260	Loven Square Double Surface	531
Gu10 Spotlights	13012360	Loven Square Trio Surface	531
Gu10 Spotlights	13012460	Loven Square Quad Surface	531
Gu10 Spotlights	10512860	Loven Round Surface	532
Gu10 Spotlights	13010160	Nelson 60 Surface	534
Gu10 Spotlights	13010260	Nelson 60 Surface Adjustable	534
Gu10 Spotlights	13005571	Messe Surface Short	538
Gu10 Spotlights	13005510	Messe 055	538
Gu10 Spotlights	13008005	Sumota V2 Surface	538
Gu10 Spotlights	13008079	Eleni Fixed Surface	538
Gu10 Spotlights	13010151	Antverp Single	539
Gu10 Spotlights	13010152	Antverp Double	539
Gu10 Spotlights	13000177	Coffee Surface	539
Gu10 Spotlights	10507035	Messe Surface Square 70	539
Gu10 Spotlights	10509088	Eleni Adjustable Surface	540
Gu10 Spotlights	10509094	Draco Surface	540
Gu10 Spotlights	13005570	Reflecto Round Surface 55	540
Gu10 Spotlights	13007065	Reflecto Round Surface 70	540
Gu10 Spotlights	13009066	Reflecto Round Surface 90	541
Gu10 Spotlights	13005535	Reflecto Square Surface 55	541
Gu10 Spotlights	13007535	Reflecto Square Surface 75	541
Gu10 Spotlights	13009534	Reflecto Square Surface 95	541
Gu10 Spotlights	130095342	Reflecto Dbl Square Surface 95	542

Outdoor Luminaires

Type	Model No	Product Name	P.N.
Gu10 Spotlights	16400001	Spike Mini	547
Gu10 Spotlights	16500042	Enza Gu10 Bollard	547

Innovative People of Metsan



Innovative People of Metsan

Innovative People of Metsan




BATIŞEHİR / İSTANBUL



BENESTA BEYOĞLU / İSTANBUL



DEPREM KONUTLARI / ADIYAMAN

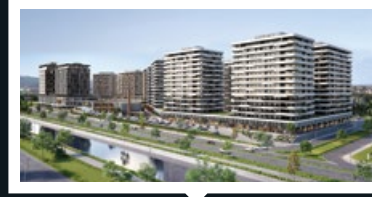

DOWNTOWN / BURSA



YENİ FİKİRTEPE / İSTANBUL



GALATASARAY STADYUMU / İSTANBUL




EMLAK KONUT



MAHALL BOMONTİ / İZMİR




MERKEZ ANKARA / ANKARA

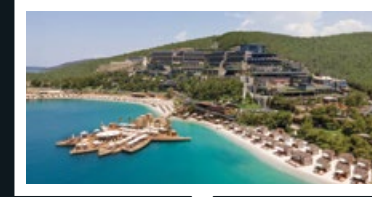


LUJO HOTEL / BODRUM



RAMS GARDEN / İSTANBUL

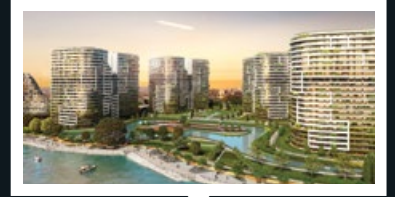


SEA PEARL ATAKÖY / İSTANBUL

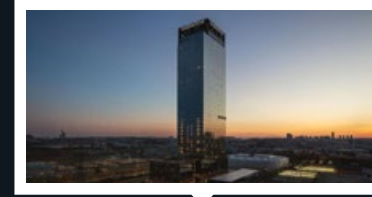

SHERATON ESENYURT / İSTANBUL




TOKİ

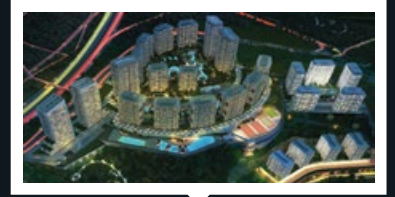

5.LEVENT



WE DESIGN
PRODUCE
ILLUMINATE



QUALITY
MADE IN
TURKEY

43
YEARS

Innovative
Lighting
Factory



Innovative Lighting Factory

Metsan Lighting started its production, which started in 1982, with 12*50 recessed adjustable spot lighting fixture.

It became one of the first lighting product manufacturing exporter from Turkey to Romania, Ukraine, Moldova and Russia in 1990. Now it continues to export its products to more than 40 countries in 4 continents.

Metsan Lighting in many prestigious projects in Turkey in terms of quality and speed of delivery.

It is proud to be a complete 'Innovative Factory' in your projects with its wide product range, technical support quality and customizable products.

As raw materials, the products enter the factory in Hadımköy and are shipped as finished products from the same location. Metsan Lighting offers you the most efficient and high quality lighting products by combining the trio of quality, design and trust.

1982

Foundation of Metsan

Origins of Metsan relies on mould production. It is the mould technology and knowledge we have that enables us today a wide range of products and fast prototype manufacture.

First rule to exist long years in lighting industry is to dominate the mould.

We began producing mould in a 50m² workshop in 1982. The turning machine that we made our first moulds at is now resting in the factory.

1990

First Export Products

Russia turned into a grand market as a result of the collapse of the Eastern Bloc. Turkey has become a major industrial production line with regard to both geographical proximity and production capacity. Meanwhile, Metsan carried out the very first exportation to Russia.

By means of export, Metsan obtained not only a producer identity, but also an identity of an exporter.

Production aimed at exportation revealed considerable progress in product range and quality improvements.

1995

New Factory

Increased capacity and high demand of exporting locations required new plant enterprise. During this year, Metsan activated a new factory occupying 3000 m² closed space in Kağıthane. Romania, Ukraine, Bulgaria joined to the exported countries.

With the raise in the number of exported countries product certification procedure launched.

Together with the new plant the manufacturing process involved a structure divided into departments.

2002

Moving to Hadimkoy Factory

The brisk in African market fostered Metsan to enhance its production capacity once more. Metsan founded a new production facility in Hadımköy due to scarce volume. A novel period has begun in exportation to Africa and Turkic Republics market via the production at 15000m² closed space.

The raise in production capacity brought about capability of supplyment in high quantities and it outshone all the others.

With the foundation of new factory in Hadımköy Metsan took the first step in institutionalisation in terms of administration

2009

New Investment for LED Products

Led technology in lighting products commenced to spread towards the end of 2000s. Metsan followingly took action to manufacture first led product range. For leds Metsan made an agreement with worldwide leader Nichia comprising supplyent and technology support. And it put Led Downlight Series on with Nichia assurance.

To become adapted to new technologies is mandatory for a competitive industrial structure.

Metsan 2000 together with Led Series turned into a structure coming up with an alternative product set.

2014

New Investment for Technology Machines

Technological improvements were achieved with investments for new machinery. The range of products was broadened and quality enhanced with the purchase of CNC, Aluminum and Zamak Injection machinery.

European countries were added to our export locations; Europe's major hotels and shopping plazas were illuminated with Metsan products.

1987

First Lighting Product

Metsan which has been manufacturing moulds for leading actors in the sector made a strategic business decision in 1987 and took the first step in lighting industry with initial 12x50 Pluton Series. There was an increasing demand for halogen spots in pluton style. Hence entering into the sector by this group was the most convenient option.

We brought halogen products out which attained high demand owing to our broad knowledge and ingenuity.

Metsan succeeded in composing Pluton product group and consequently gave up manufacturing mould for the market and began to exploit the mould room merely to develop its own products.

1991

Product Line Expansion

The synchrony in accordance to the export compelled a raise in capacity. During this period, Metsan invested in its initial factory in Çağlayan. Product range advanced subsequently and various product groups emerged according to the needs of lighting industry.

With the raise in the number of exported countries product certification procedure launched

.Metsan was capable of conducting mass production of products more than a hundred by the help of enhanced product range.

1998

Machinery Capabilites Improved

To keep pace with new progress in technology is vital in order to keep our products up to date. With this in mind, Metsan furnished the equipment pool with the latest automation systems. Through this turn the capacity boosted 200% and the performance as well.

In order to supply product for diverse markets recent production technologies should be employed.

Assembly lines rested upon technology and integrated with qualified human resource strengthened the perception of quality within the sector.

2005

Construction Companies are Growing

A decade ago the construction industry progressed substantially particularly in Turkey. There was an intense demand for Metsan products which have high quality-price ratio both in private sector and public projects.

The evolution of lighting industry is largely in direct proportion to construction industry.

First R&D unit is set up for quality standards which meet various product expectations of domestic and foreign market.

2012

Metsan Started for Changing Corporate Identity

As the brand familiarity ascended, practices began to redesign the corporate identity. It was a turning point for Metsan on the way to branding.

Investing in the brand enhances the quality perception among the other players and builds mutual trust.

Today, Metsan proceeds rapidly with its 170 employees on a 15000 m² closed space by a product range over 3500 exported to 30 countries.

2025 >

Modernized LED Products and Sales Strategy

We set our targets correctly. We have extended our warranty from 5 to 6 years. We have added at least 300 new products to our range of products to create new alternatives to the lighting sector.

Our newly added high quality products that we will produce will enlighten housing, shopping center, hotel and hospital projects with Metsan products.




 **METSAN**
High efficiency LED pcb

Prismatic Diffuser

Aluminum injection frame.
Superior protection upgraded to IP54 level with a screw system.

Aluminum injection heatsink with a smooth surface to maximize heat transfer

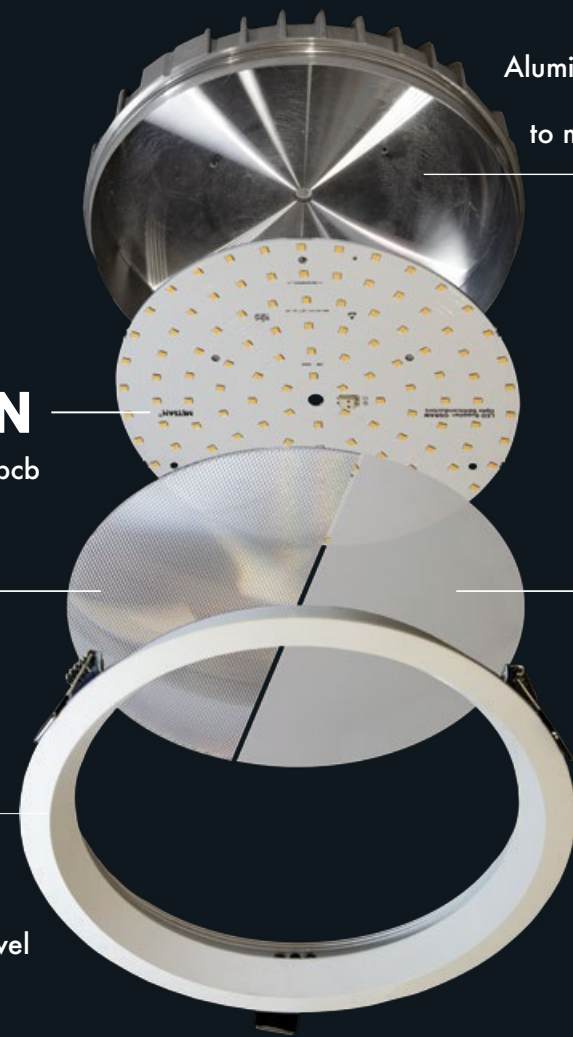

Opal Diffuser



METSAN DOWNLIGHT

INDOOR
OUTDOOR
PRIME
SEGMENT
EMERGENCY

The product Indoor (INDOOR) category provides the professional product types between an superior quality and qualified performance.

- Project products proven by Metsan include high quality and long life time applied products
- Full indoor lighting model range to cover all applications and requirements
- Nominal life-time up to 50,000 h
- For Indoor category luminaires of protection class III
- Focused on high efficiency and top quality



FAMA FAMILY



With its flat frame and 8 different flush-mounted options for various hole sizes and other types, the Fama model is classic, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and **50,000+** lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Fama product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.

ARE YOU LOOKING FOR BETTER LIGHTING?

With its large product ranges, METSAN offers a wide-ranging assortment of LED luminaries for a broad spectrum of application areas.



Fama 1"

Recessed Downlight

P: 25



Fama 2"

Recessed Downlight

P: 26



Fama 3"

Recessed Downlight

P: 27



Fama 4"

Recessed Downlight

P: 28



Fama 5"

Recessed Downlight

P: 28



Fama 6"

Recessed Downlight

P: 30



Fama 8"

Recessed Downlight

P: 31



Fama 8" Surface

Surface Mounted
Downlight

P: 32



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Mikroprizmatik (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø70mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:80mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø70mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:80mm

Beam Informations And Technicals / Teknik ve Açılmal Bilgiler



105°

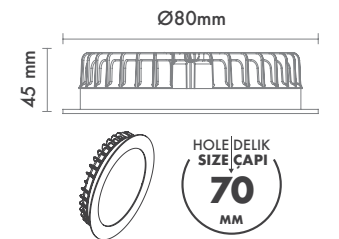

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Fama 2''

Product Code: M 200 66
Model No: 11020066



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:95mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:95mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

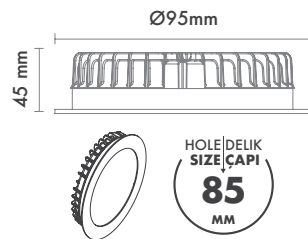

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Fama 3''

Product Code: M 300 66
Model No: 11030066



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:117mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

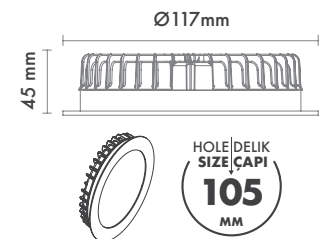

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:147mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

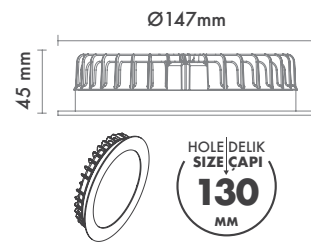

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85




Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

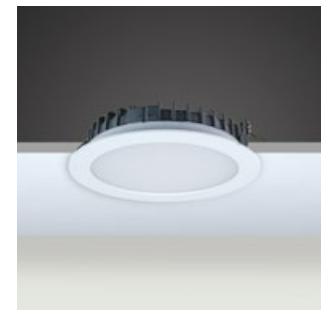

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:173mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

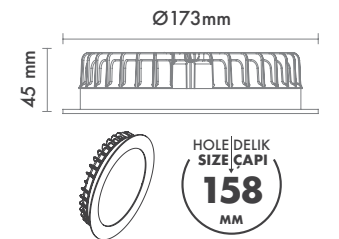

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø175mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:190mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø175mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:190mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



110°

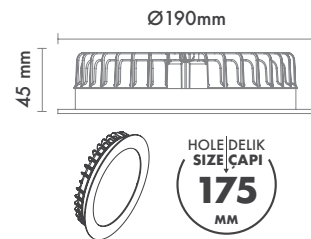

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø214mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:229mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø214mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:229mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



110°

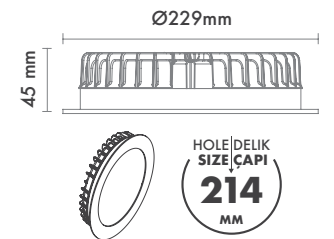

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85
Osram	3371 lm	3525 lm	3678 lm	500	30 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Fama 8'' Surface

Product Code: MSY-29 250 66
Model No: 13025066



Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:66mm W:240mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:66mm G:240mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



110°

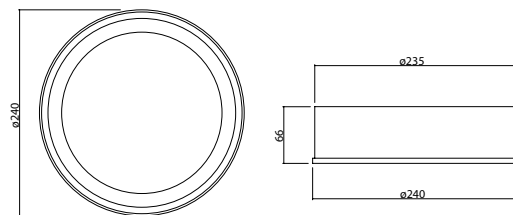

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85
Osram	3371 lm	3525 lm	3678 lm	500	30 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



MONOBLOCK FAMILY

With its monoblock body and 6 different flush-mounted options for various hole sizes and other types, the Monoblock model is classic, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented mono solution. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Monoblock product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Monoblock 3''

Recessed Downlight

P: 35



Monoblock 4''

Recessed Downlight

P: 36



Monoblock 5''

Recessed Downlight

P: 37



Monoblock 6''

Recessed Downlight


P: 38




Monoblock 8''

Recessed Downlight

P: 39

**Monoblock 3''****Product Code:** M 300 99**Model No:** 11030099**Product Specification / Ürün Özellikleri****Installation Type :** Recessed**Body and Heatsink :** Aluminium Injection Body and Heatsink**Diffuser Options :** Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP20 / IP44**Hole Size :** Ø90mm**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:35mm W:106mm**Montaj Tipi :** Sıva Altı**Gövde ve Soğutucu :** Alüminyum Enjeksiyon Gövde ve Soğutucu**Difüzör Çeşitler :** Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP20 / IP44**Delik Çapı :** Ø90mm**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:35mm G:106mm**Beam Informations And Technicals / Teknik ve Açısal Bilgiler**

105°

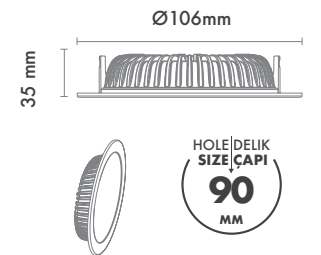

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85

Available Finishes
Uygulama Renkleri
 Textured White
Ral 9016


 Textured Grey
Ral 9006

 Textured Black
Ral 9005


 *For more page : 550
 *Diğer renkler : 550


**Monoblock 4''**

Product Code: M 400 99
Model No: 11040099

**Product Specification / Ürün Özellikleri****Installation Type :** Recessed**Body and Heatsink :** Aluminium Injection Body and Heatsink**Diffuser Options :** Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP20 / IP44**Hole Size :** Ø125mm**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:35mm W:145mm**Montaj Tipi :** Sıva Altı**Gövde ve Soğutucu :** Alüminyum Enjeksiyon Gövde ve Soğutucu**Difüzör Çeşitler :** Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP20 / IP44**Delik Çapı :** Ø125mm**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:35mm G:145mm**Beam Informations And Technicals / Teknik ve Açısal Bilgiler**


105°

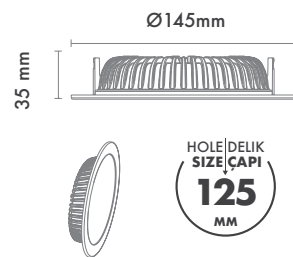

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85

Available Finishes
Uygulama Renkleri● Textured White
Ral 9016● Textured Grey
Ral 9006● Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550**Monoblock 5''**

Product Code: M 500 99
Model No: 11050099


**Product Specification / Ürün Özellikleri****Installation Type :** Recessed**Body and Heatsink :** Aluminium Injection Body and Heatsink**Diffuser Options :** Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP20**Hole Size :** Ø145mm**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:35mm W:164mm**Montaj Tipi :** Sıva Altı**Gövde ve Soğutucu :** Alüminyum Enjeksiyon Gövde ve Soğutucu**Difüzör Çeşitler :** Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP20**Delik Çapı :** Ø145mm**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:35mm G:164mm**Beam Informations And Technicals / Teknik ve Açısal Bilgiler**

110°




	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85


Available Finishes
Uygulama Renkleri● Textured White
Ral 9016● Textured Grey
Ral 9006● Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

**Monoblock 6''****Product Code:** M 600 99**Model No:** 11060099**Product Specification / Ürün Özellikleri****Installation Type :** Recessed**Body and Heatsink :** Aluminium Injection Body and Heatsink**Diffuser Options :** Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP20**Hole Size :** Ø175mm**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:35mm W:199mm**Montaj Tipi :** Sıva Altı**Gövde ve Soğutucu :** Alüminyum Enjeksiyon Gövde ve Soğutucu**Difüzör Çeşitler :** Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP20**Delik Çapı :** Ø175mm**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:35mm G:199mm**Beam Informations And Technicals / Teknik ve Açılal Bilgiler**


110°

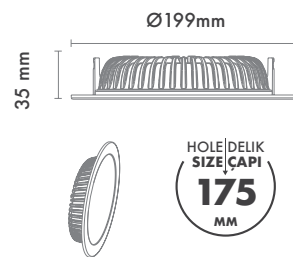

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85

Available Finishes
Uygulama Renkleri● Textured White
Ral 9016● Textured Grey
Ral 9006● Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550**Monoblock 8''****Product Code:** M 800 99**Model No:** 11080099**Product Specification / Ürün Özellikleri****Installation Type :** Recessed**Body and Heatsink :** Aluminium Body and Heatsink**Diffuser Options :** Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP20 / IP44**Hole Size :** Ø210mm**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:35mm W:238mm**Montaj Tipi :** Sıva Altı**Gövde ve Soğutucu :** Alüminyum Gövde ve Soğutucu**Difüzör Çeşitler :** Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP20 / IP44**Delik Çapı :** Ø210mm**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:35mm G:238mm**Beam Informations And Technicals / Teknik ve Açılal Bilgiler**

110°

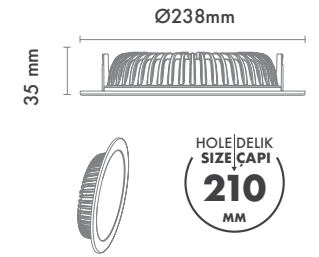

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85

Available Finishes
Uygulama Renkleri● Textured White
Ral 9016● Textured Grey
Ral 9006● Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

YAREN FAMILY

With its curved and monoblock body and 3 different flush-mounted options for various hole sizes and other types, the Yaren model is different, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Yaren product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Yaren 2''

Recessed Downlight

P: 41



Yaren 3''

Recessed Downlight

P: 42



Yaren 4''

Recessed Downlight

P: 43



Yaren 2''

Product Code: M 200 98
Model No: 11020098



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:43mm W:94mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm

Dim Opsiyonları : Triak / 1-10 V / DALI



Ürün Ölçüleri : Y:43mm G:94mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

HOLE DELİK
SIZE ÇAPI
85
MM

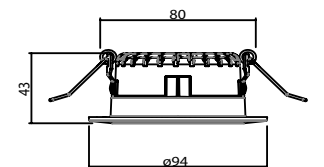

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:47mm W:118mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:47mm G:118mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



HOLE|DELİK
SIZE|ÇAPI
105
MM

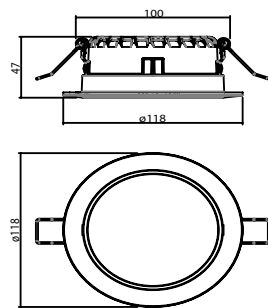

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85




Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

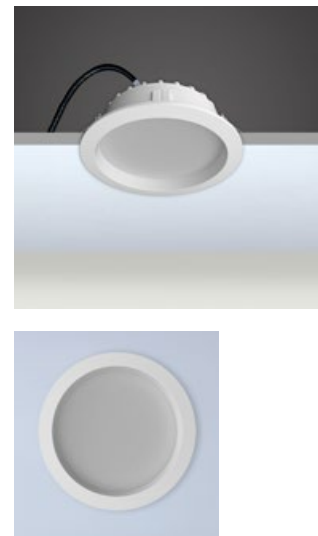

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Hole Size : Ø140mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:35mm W:164mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Delik Çapı : Ø140mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:35mm G:164mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



HOLE|DELİK
SIZE|ÇAPI
130
MM

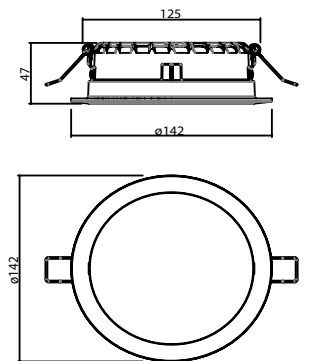

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



METSAN 1982 FAMILY

With its flat frame and 7 different flush-mounted options for various hole sizes and other types, the Metsan 1982 model is classic, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Metsan 1982 product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Metsan 1982 2''
Recessed Downlight

P: 35



Metsan 1982 3''
Recessed Downlight

P: 36



Metsan 1982 4''
Recessed Downlight

P: 37



Metsan 1982 5''
Recessed Downlight

P: 38



Metsan 1982 6''
Recessed Downlight

P: 39



Metsan 1982 8''
Recessed Downlight

P: 39



Metsan 1982 2''
Product Code: M 200 95
Model No: 11020095



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:95mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:95mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

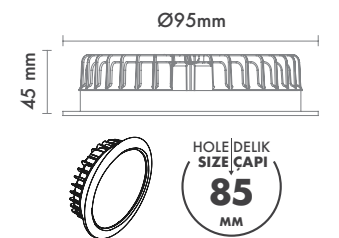

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:117mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

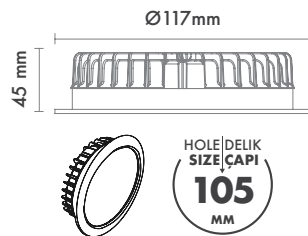

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:147mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

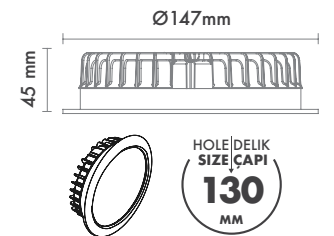

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Metsan 1982 5''

Product Code: M 500 95
Model No: 11050095



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:173mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



110°

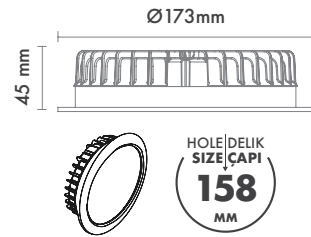

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006


Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Metsan 1982 6''

Product Code: M 600 95
Model No: 11060095

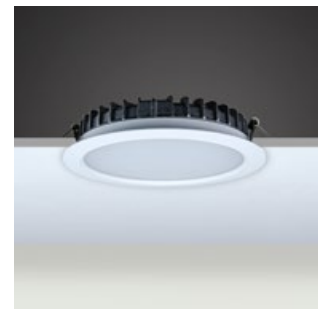

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø175mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:190mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø175mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:190mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



110°

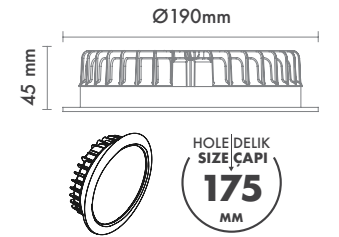

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Mikroprizmatik (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø214mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:229mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø214mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:229mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

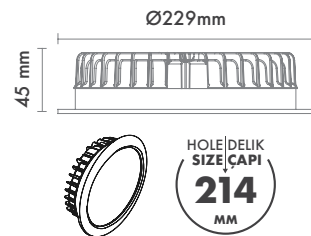

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85
Osram	3371 lm	3525 lm	3678 lm	500	30 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



DOME FAMILY

With its stepped frame and 9 different flush-mounted options for various hole sizes and other types, the Dome model is trend, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings for its general light downlights.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Dome product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Dome 1''

Recessed Downlight

P: 35



Dome 2''

Recessed Downlight

P: 36



Dome 3''

Recessed Downlight

P: 37



Dome 4''

Recessed Downlight

P: 38



Dome 5''

Recessed Downlight

P: 35



Dome 6''

Recessed Downlight

P: 36



Dome 8''

Recessed Downlight

P: 37



Dome Spot 30

Recessed Spotlight

P: 38



Dome Surface 4''

Surface Mounted
Downlight

P: 39



Dome Surface 8''

Surface Mounted
Downlight

P: 39



Dome 1''

Product Code: M 100 45
Model No: 11010045



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø70mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:80mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø70mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:80mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



100°

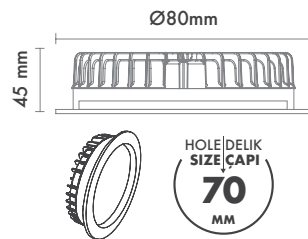

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Dome 2''

Product Code: M 200 45
Model No: 11020045



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:100mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø85mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:100mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



100°

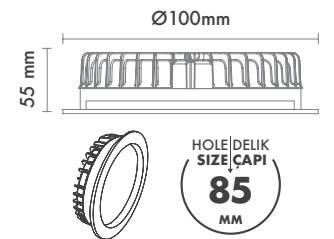

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø105mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:117mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



100°

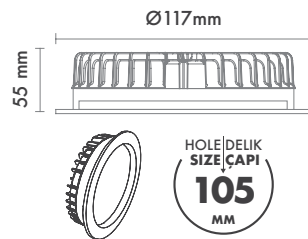

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø130mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:147mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



100°

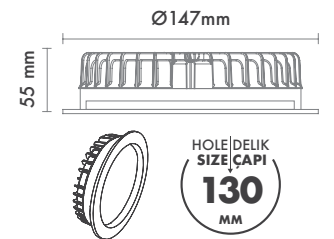

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:173mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

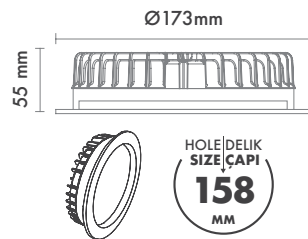

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø175mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:190mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø175mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:190mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

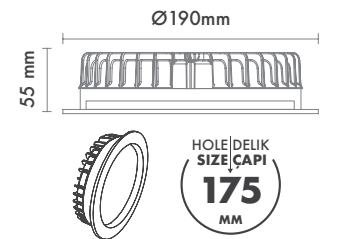

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprizmatik (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø214mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:231mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø214mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:231mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

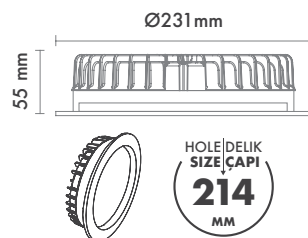

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85
Osram	3371 lm	3525 lm	3678 lm	500	30 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:130mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:130mm G:147mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

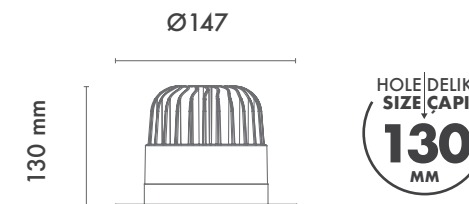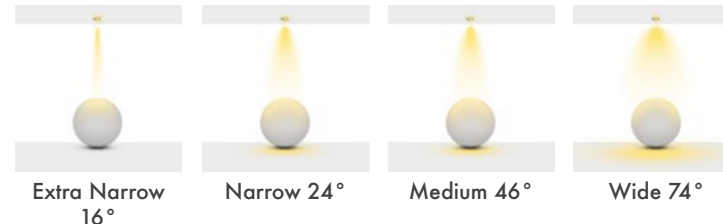

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016


Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Various Ring Finishes
 İhtilendirilebilir Bilezik Renkleri

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:150mm W:125mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrotatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:150mm G:125mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Wide 100°



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85
Osram	1900 lm	2100 lm	2250 lm	500	20 Watt	>85
Osram	2900 lm	3100 lm	3250 lm	700	30 Watt	>85



CASAMBI

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Dome Surface 8''

Product Code: MSY-29 250 45
Model No: 13029250

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Mikroprizmatik (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:mm W:mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP54 / IP65

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:mm G:mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Wide 105°

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85
Osram	3371 lm	3525 lm	3678 lm	500	30 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



APRILLA FAMILY

With its curved frame and 7 different flush-mounted options for various hole sizes and other types, the Aprilla model is classic, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heat-sink construction along with being applicable for low ceilings.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Aprilla product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Aprilla 2''

Recessed Downlight

P: 35



Aprilla 2''

Recessed Downlight

P: 36



Aprilla 2''

Recessed Downlight

P: 37



Aprilla 2''

Recessed Downlight

P: 38



Aprilla 2''

Recessed Downlight

P: 35



Aprilla 2''

Recessed Downlight

P: 36



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:100mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø85mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:100mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

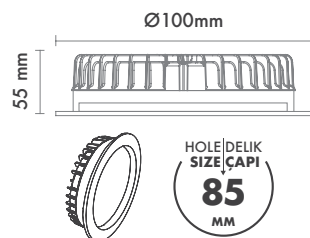

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85




Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

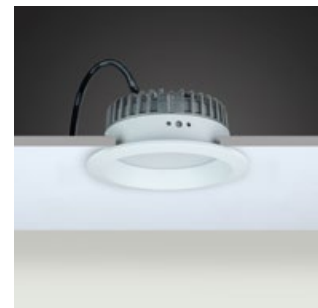

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:117mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

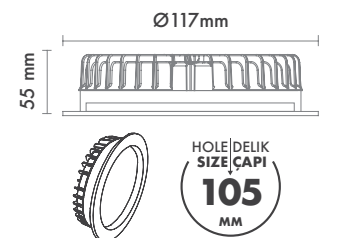

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:147mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

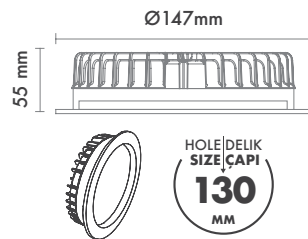

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:173mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

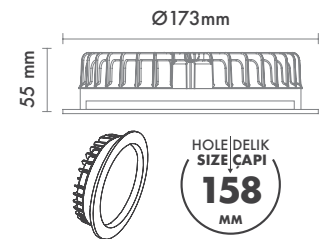

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø175mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:190mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø175mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:190mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

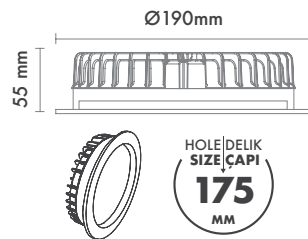

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø214mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:231mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø214mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:231mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

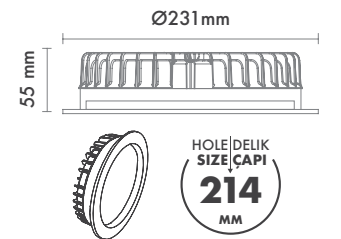

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85
Osram	3371 lm	3525 lm	3678 lm	500	30 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550




COMPACT FAMILY

With its compact deep frame and 8 different flush-mounted options for various hole sizes and other types, the Compact model is classic, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Compact product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.

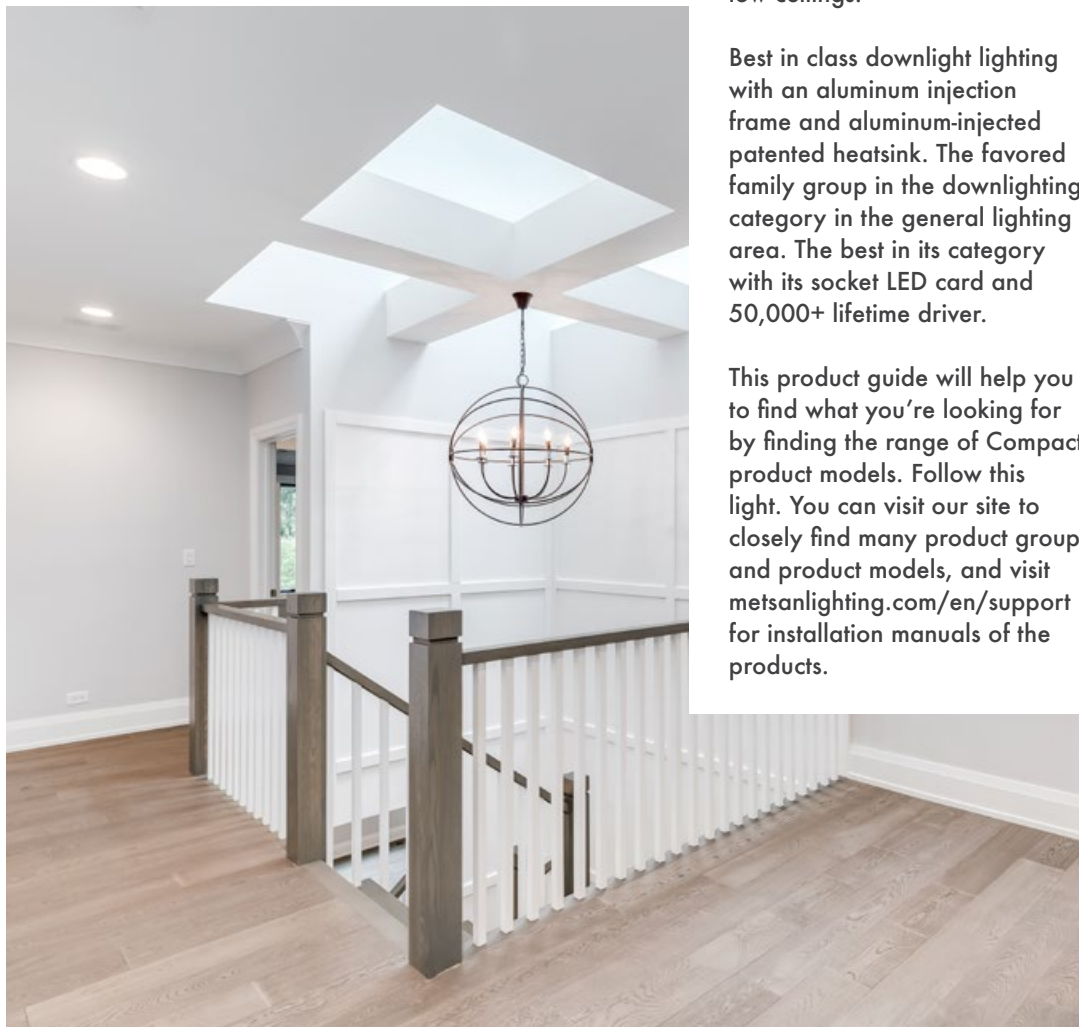

Compact 2''

Recessed Downlight

P: 75



Compact 3''

Recessed Downlight

P: 76



Compact 4''

Recessed Downlight

P: 77



Compact 5''

Recessed Downlight

P: 78



Compact 6''

Recessed Downlight

P: 79



Compact 10''

Recessed Downlight

P: 80



Compact Mini Basic

Recessed Spotlight

P: 81



Compact 2''

Product Code: M 200 92
Model No: 11020092



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP 65

Hole Size : Ø70mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:80mm W:84mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø70mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:80mm G:84mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



100°

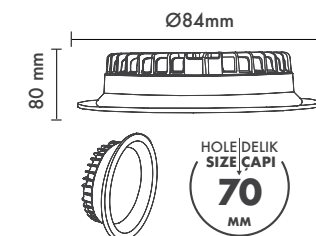

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006


Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550




**Compact 3''**

Product Code: M 300 92
Model No: 11030092

**Product Specification / Ürün Özellikleri****Installation Type :** Recessed**Body and Heatsink :** Aluminium Injection Body and Heatsink**Diffuser Options :** Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP54 / IP65**Hole Size :** Ø95mm**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:55mm W:112mm**Montaj Tipi :** Sıva Altı**Gövde ve Soğutucu :** Alüminyum Enjeksiyon Gövde ve Soğutucu**Difüzör Çeşitler :** Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP54 / IP65**Delik Çapı :** Ø95mm**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:55mm G:112mm**Beam Informations And Technicals / Teknik ve Açılal Bilgiler**

100°

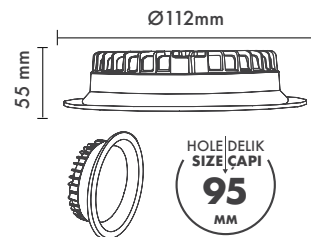

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85

Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016


● Textured Grey
Ral 9006

● Textured Black
Ral 9005


*For more page : 550
*Diğer renkler : 550

**Compact 4''**

Product Code: M 400 92
Model No: 11040092

**Product Specification / Ürün Özellikleri****Installation Type :** Recessed**Body and Heatsink :** Aluminium Injection Body and Heatsink**Diffuser Options :** Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP54 / IP65**Hole Size :** Ø115mm**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:55mm W:131mm**Montaj Tipi :** Sıva Altı**Gövde ve Soğutucu :** Alüminyum Enjeksiyon Gövde ve Soğutucu**Difüzör Çeşitler :** Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP54 / IP65**Delik Çapı :** Ø115mm**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:55mm G:131mm**Beam Informations And Technicals / Teknik ve Açılal Bilgiler**

100°

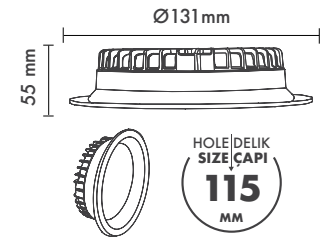

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85

Available Finishes
Uygulama Renkleri


● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



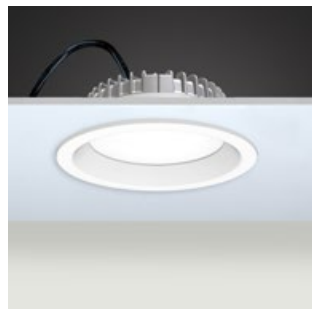

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø140mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:159mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø140mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:159mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

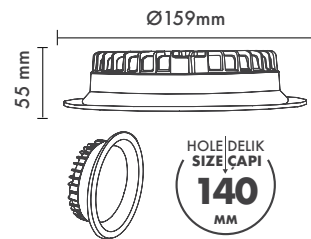

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85




Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

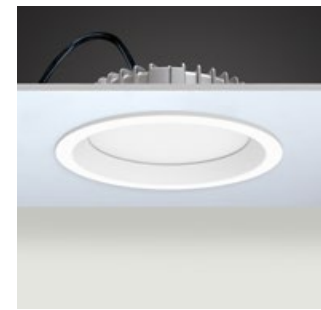

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø165mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:188mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø165mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:188mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

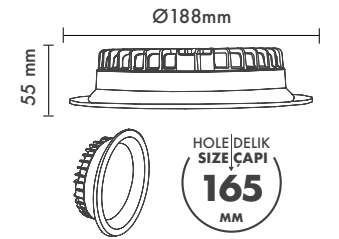

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprizmatik (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54 / IP65

Hole Size : Ø220mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:240mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP54 / IP65

Delik Çapı : Ø220mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:240mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



105°

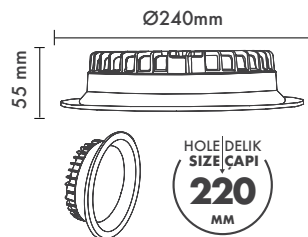

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø70mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:100mm W:87mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø70mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:100mm G:87mm


Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



Narrow 23°

Medium 37°

Wide 51°

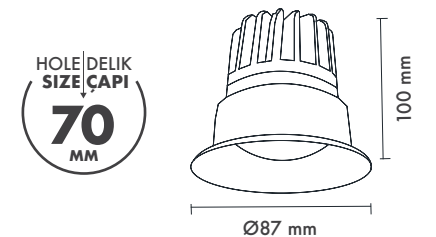

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85
Osram	3371 lm	3525 lm	3678 lm	500	30 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



AGENOR FAMILY

With its deep body and 7 different flush-mounted options for various hole sizes and other types, the Agenor model is trend, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings for its general light downlights.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Agenor product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Agenor 2''

Recessed Downlight

P: 84



Agenor 3''

Recessed Downlight

P: 85



Agenor 4''

Recessed Downlight

P: 86



Agenor 5''

Recessed Downlight

P: 87



Agenor 6''

Recessed Downlight

P: 88



Agenor 8''

Recessed Downlight

P: 89



Agenor 8'' Surface


Surface Mounted Downlight

P: 90



Agenor 2''

Product Code: M 200 68
Model No: 11020068

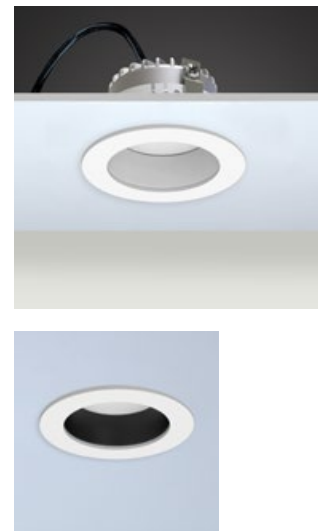

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:95mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:95mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



95°

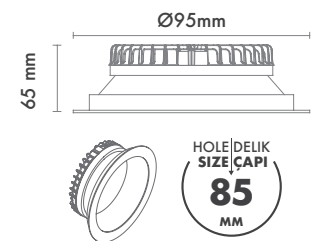

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



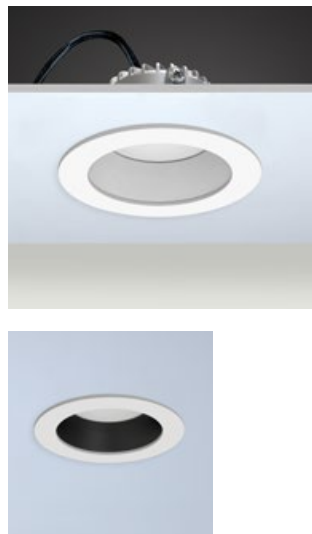

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:117mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

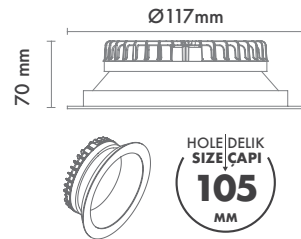

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85




Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

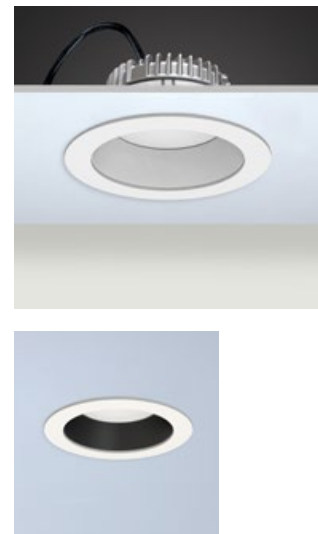

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:147mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

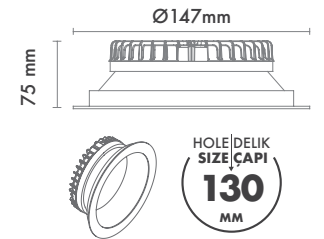

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85



Available Finishes
Uygulama Renkleri


● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



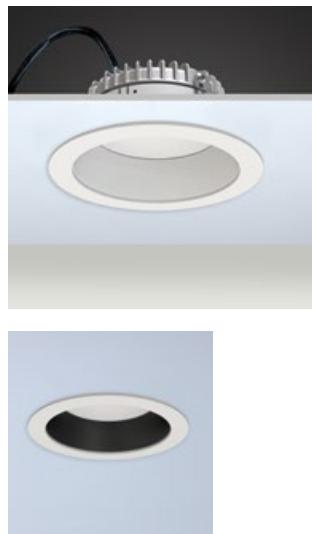

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:173mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

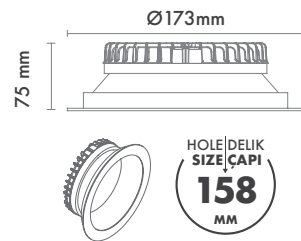

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85




Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

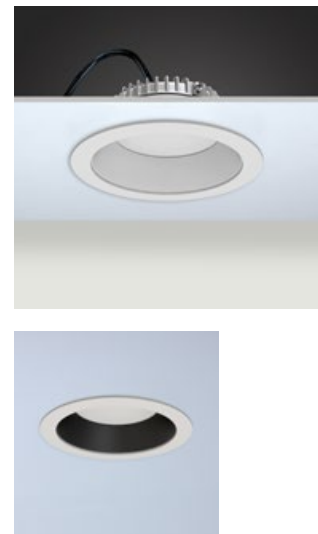

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø175mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:85mm W:190mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø175mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:85mm G:190mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

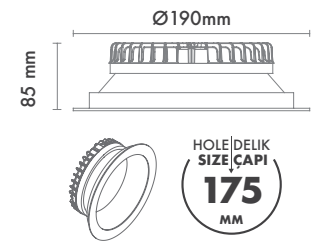

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005


*For more page : 550
*Diğer renkler : 550





Ageror 8''

Product Code: M 800 68
Model No: 11080068

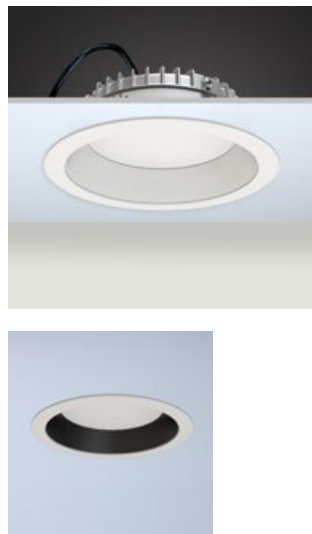

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø214mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:80mm W:229mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø214mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:80mm G:229mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



105°

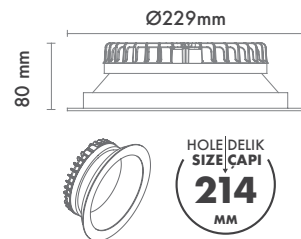

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85
Osram	3371 lm	3525 lm	3678 lm	500	30 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Ageror 8'' Surface

Product Code: MSY 800 68
Model No: 13080068

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:120mm W:200mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:120mm G:200mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Wide 100°

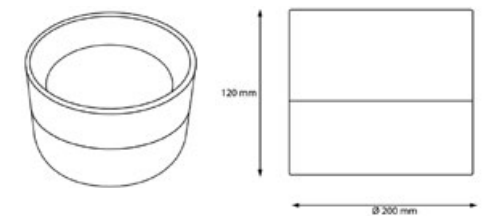

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



RENIN FAMILY

With its square flat frame and 7 different flush-mounted options for various hole sizes and other types, the Renin model is classic, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Renin product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Renin 2''

Recessed Downlight

P: 93



Renin 3''

Recessed Downlight

P: 94



Renin 4''

Recessed Downlight

P: 95



Renin 5''

Recessed Downlight

P: 96



Renin 6''

Recessed Downlight

P: 97



Renin 8''

Recessed Downlight

P: 98



Renin 2''

Product Code: M 200 65
Model No: 11020065



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:94mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:94mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

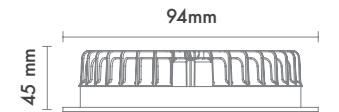

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:117mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

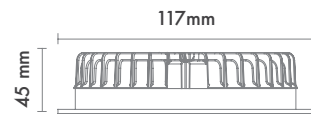

HOLE/DELİK
 SIZE/ÇAPI
105
 MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85



Available Finishes
 Uygulama Renkleri

● Textured White
 Ral 9016

● Textured Grey
 Ral 9006

● Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:147mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

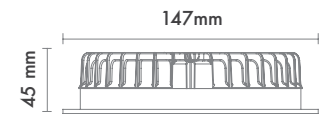

HOLE/DELİK
 SIZE/ÇAPI
130
 MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
 Uygulama Renkleri

● Textured White
 Ral 9016

● Textured Grey
 Ral 9006

● Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550





Renin 5''

Product Code: M 500 65
Model No: 11050065



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:174mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:174mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



110°

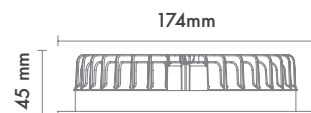

HOLE/DELİK
SIZE/ÇAPI
158
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006


Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Renin 6''

Product Code: M 600 65
Model No: 11060065

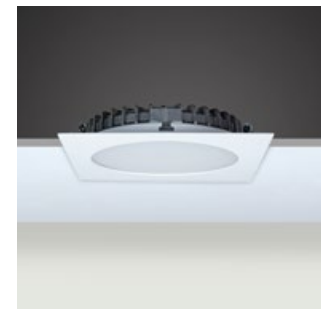

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø175mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:196mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø175mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:196mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



110°

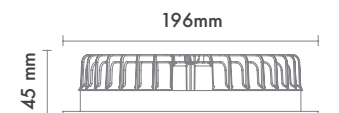

HOLE/DELİK
SIZE/ÇAPI
175
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005


*For more page : 550
*Diğer renkler : 550





Renin 8''

Product Code: M 800 65
Model No: 11080065

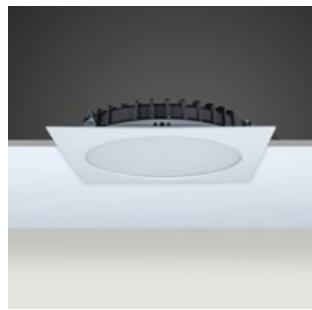

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø214mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:232mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø214mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:232mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



110°

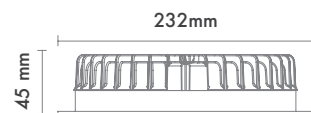

HOLE/DELİK
SIZE/ÇAPI
214
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85
Osram	3371 lm	3525 lm	3678 lm	500	30 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



VELAR R FAMILY



With its square frame and deep body and 7 different flush-mounted options for various hole sizes and other types, the Velar R model is classic, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Velar R product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/ support for installation manuals of the products.



Velar-R 2''

Recessed Downlight

P: 101



Velar-R 3''

Recessed Downlight

P: 102



Velar-R 4''

Recessed Downlight

P: 103



Velar-R 5''

Recessed Downlight

P: 104



Velar-R 6''

Recessed Downlight

P: 105



Velar-R 8''

Recessed Downlight

P: 106



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:94mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:94mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

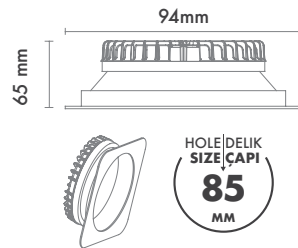

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:117mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

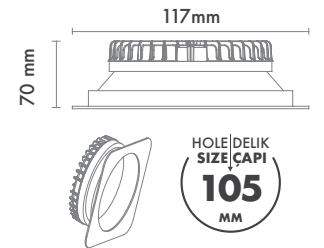

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:147mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



95°

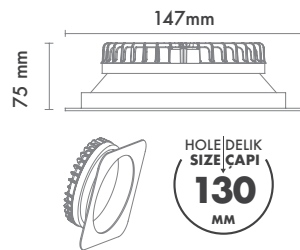

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:173mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

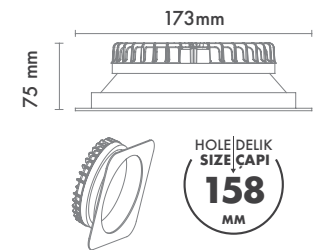

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø175mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:85mm W:196mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø175mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:85mm G:196mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

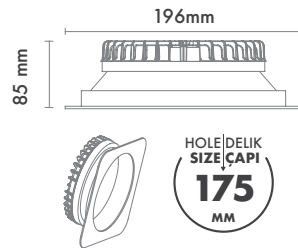

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø214mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:80mm W:232mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø214mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:80mm G:232mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

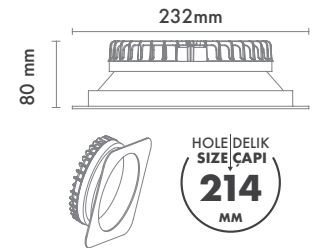

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85
Osram	3371 lm	3525 lm	3678 lm	500	30 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



JUNO & RHINO FAMILY

With its plain aluminium frames several sizes for various hole sizes and other types, the Juno and Rhino models are attractive, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings for its general light downlights.

Best in class downlight lighting with an aluminium injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Juno and Rhino product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Juno 3''

Recessed Downlight

P: 108



Juno 4''

Recessed Downlight

P: 109



Juno 5''

Recessed Downlight

P: 110



Juno 6''

Recessed Downlight

P: 111



Rhino 3''

Recessed Downlight

P: 112



Rhino 5''

Recessed Downlight

P: 113



Rhino 6''

Recessed Downlight

P: 114



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:123mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:123mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



100°

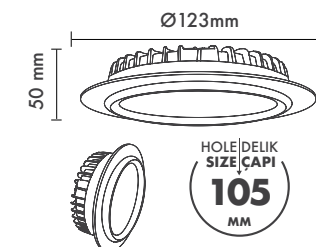

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:147mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

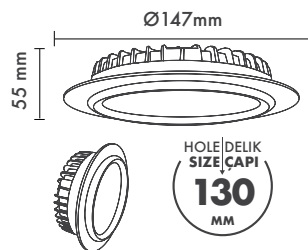

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:173mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

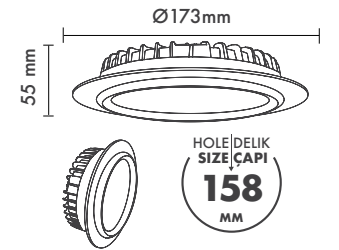

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø175mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:190mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø175mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:190mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

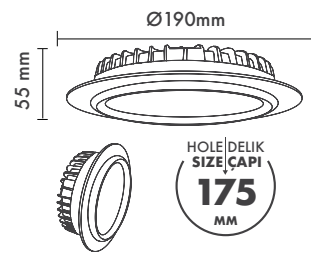

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:123mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:123mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

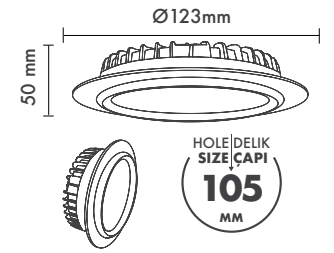

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	720 lm	760 lm	800 lm	350	8 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:173mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

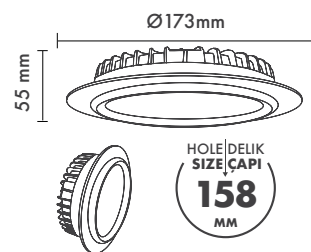

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø175mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:190mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø175mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:190mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

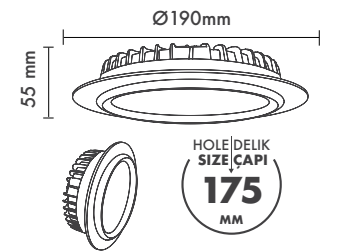

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



DENN FAMILY

With its double light source outlook with several sizes for various hole sizes and other types, the Denn models are attractive, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings for its general light downlights.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Denn product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Denn 2''

Recessed Downlight

P: 116



Denn 3''

Recessed Downlight

P: 117



Denn 4''

Recessed Downlight

P: 118



Denn 5''

Recessed Downlight

P: 119



Denn 6''

Recessed Downlight

P: 120



Denn 8''

Recessed Downlight

P: 121



Denn 2''

Product Code: M 200 266

Model No: 11020266

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø85mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:192mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm x2


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:192mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

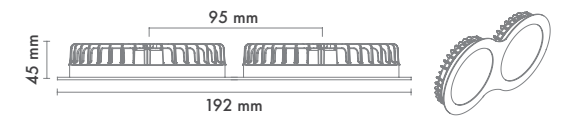

HOLE|DELİK
SIZE|ÇAPI
85x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1080 lm	1140 lm	1200 lm	350	12 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Mikroprizmatik (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø105mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:234mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm x2

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:234mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

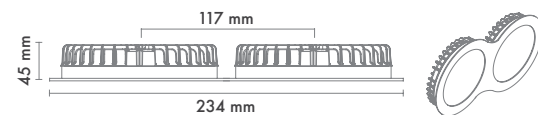

HOLE|DELİK
SIZE|ÇAPI
105x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1440 lm	1520 lm	1600 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Mikroprizmatik (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø130mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm x2

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:117mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

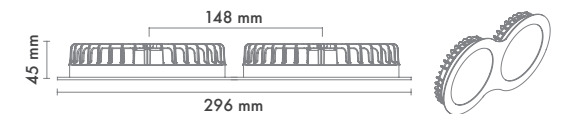

HOLE|DELİK
SIZE|ÇAPI
130x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2000 lm	2100 lm	2200 lm	350	20 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø158mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:348mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm x2


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:348mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



105°

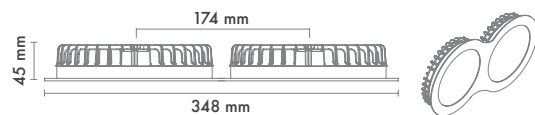HOLE|DELİK
SIZE|ÇAPI
158x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	3520 lm	3680 lm	3840 lm	350	32 Watt	>85

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø175mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:392mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø175mm x2


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:392mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



110°

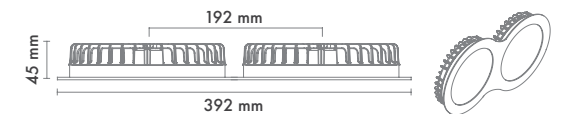HOLE|DELİK
SIZE|ÇAPI
175x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	4620 lm	4830 lm	5040 lm	350	42 Watt	>85

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø214mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:464mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø214mm x2


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:464mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



110°

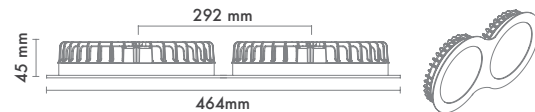

HOLE|DELİK
 SIZE|ÇAPI
214x2
 MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	5170 lm	5406 lm	5640 lm	350	46 Watt	>85
Osram	6742 lm	7050 lm	7356 lm	500	60 Watt	>85



Available Finishes
 Uygulama Renkleri

Textured White
 Ral 9016

Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550



GALLE FAMILY

With its deep double light source outlook with several sizes for various hole sizes and other types, the Galle models are attractive, but ahead of the curve with its quality and long lifespan. It is a product that offers a high level of efficiency and strong heatsink construction along with being applicable for low ceilings for its general light downlights.

Best in class downlight lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the downlighting category in the general lighting area. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Galle product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Galle 2''

Recessed Downlight

P: 123



Galle 3''

Recessed Downlight

P: 124



Galle 4''

Recessed Downlight

P: 125



Galle 5''

Recessed Downlight

P: 126



Galle 6''

Recessed Downlight

P: 127



Galle 8''

Recessed Downlight

P: 128



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø85mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:192mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm x2


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:192mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



95°

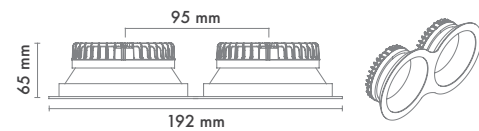

HOLE|DELİK
SIZE|ÇAPI
85x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1080 lm	1140 lm	1200 lm	350	12 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø105mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:234mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm x2


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:234mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



95°

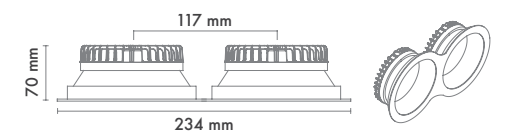

HOLE|DELİK
SIZE|ÇAPI
105x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1080 lm	1140 lm	1200 lm	350	12 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø130mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:296mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm x2


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:296mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



95°

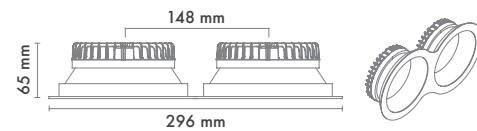

HOLE|DELİK
SIZE|ÇAPI
130x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1440 lm	1520 lm	1600 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø158mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:348mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm x2


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:348mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



100°

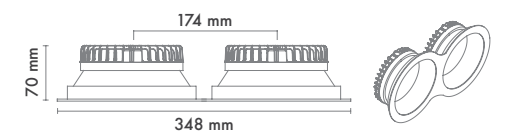

HOLE|DELİK
SIZE|ÇAPI
158x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2000 lm	2100 lm	2200 lm	350	20 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø175mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:85mm W:392mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø175mm x2


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:85mm G:392mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



100°

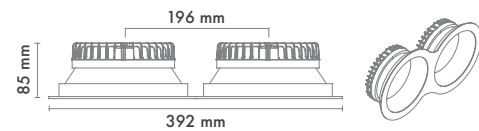

HOLE|DELİK
SIZE|ÇAPI
175x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2000 lm	2100 lm	2200 lm	350	20 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : Ø214mm x2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:80mm W:464mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø214mm x2


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:80mm G:464mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



100°

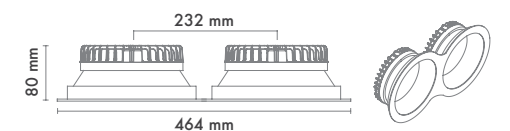

HOLE|DELİK
SIZE|ÇAPI
214x2
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	4620 lm	4830 lm	5040 lm	350	42 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550




V FAMILY

With its thin frame, high-quality components, low ugr and well-designed products, V products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Reflecto product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.

V is Best !

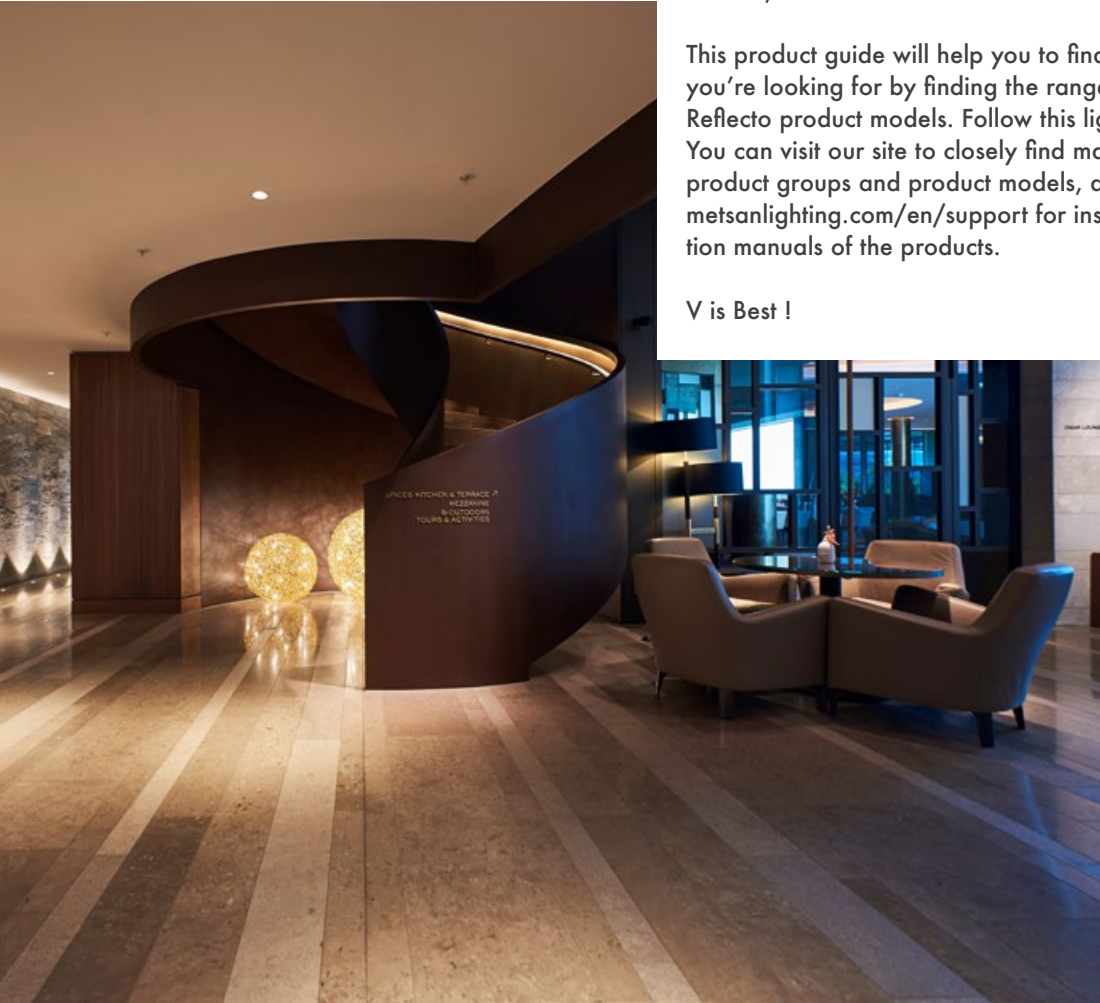

Verba

Recessed Spotlight

P: 162



Versa

Recessed Spotlight

P: 163



Valeri Fixed

Recessed Spotlight

P: 164



Verfa

Recessed Spotlight

P: 165



Valeri Basic Adjustable

Recessed Spotlight

P: 166



Valeri Step Adjustable

Recessed Spotlight

P: 167



Verfa Square

Recessed Spotlight


P: 168



Verfa 4'' Adjustable

Recessed Spotlight

P: 169

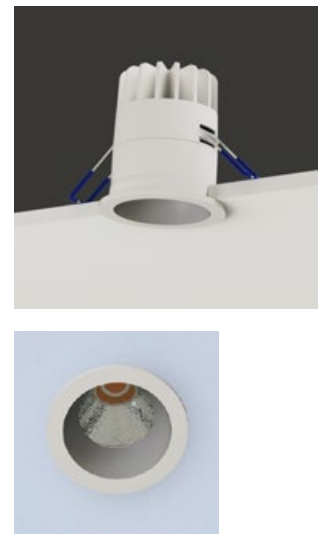

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP44 / IP65

Hole Size : Ø60mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:84mm W:69mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP44 / IP65

Delik Çapı : Ø60mm

Dim Opsiyonları : Triac / 1-10 V / DALI

Ürün Ölçüleri : Y:84mm G:69mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

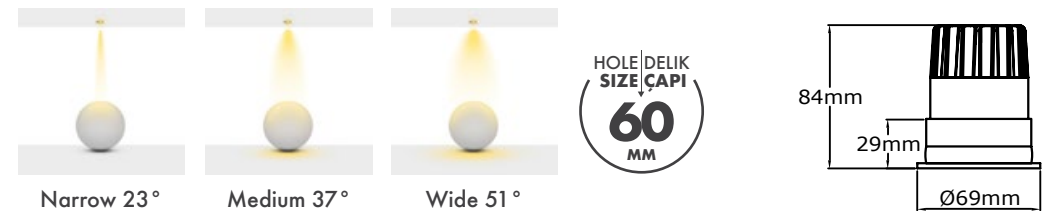

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Verba
Product Code: MA 809-50 SC10
Model No: 12080950



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP44 / IP65

Hole Size : Ø68mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:94mm W:77mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP44 / IP65

Delik Çapı : Ø68mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:94mm G:77mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

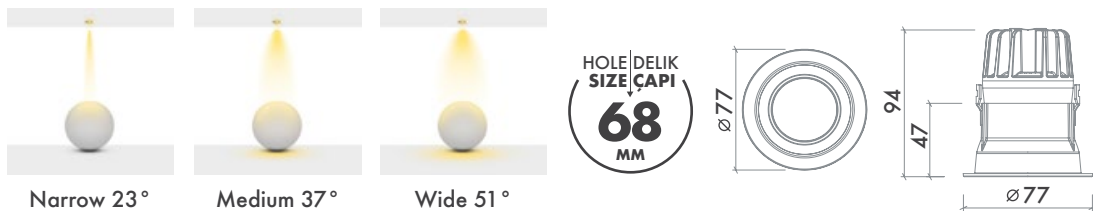

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Versa
Product Code: MA 810-50 SC10
Model No: 12081050

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP44 / IP65

Hole Size : Ø80mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:94mm W:94mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP44 / IP65

Delik Çapı : Ø80mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:94mm G:94mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

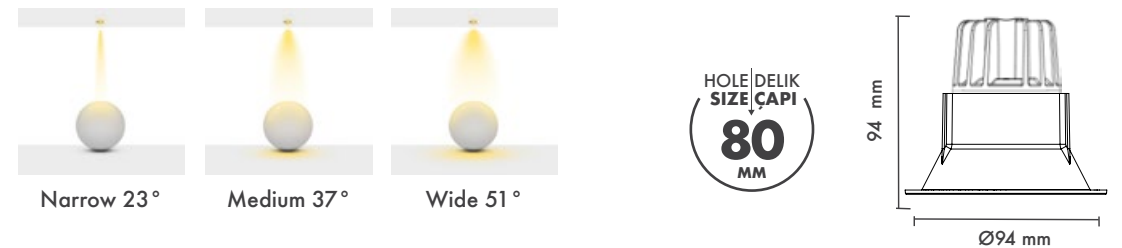

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø92mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:105mm W:100mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø92mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:105mm G:100mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80




Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

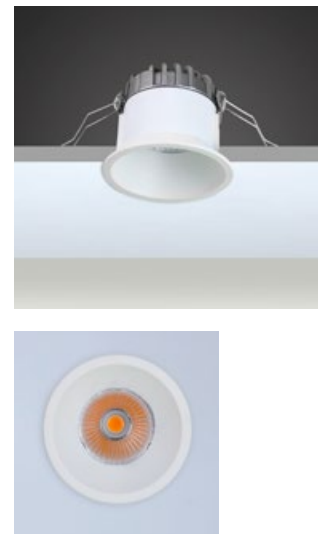

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP44 / IP65

Hole Size : Ø80mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:87mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP44 / IP65

Delik Çapı : Ø80mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:87mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø92mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:100mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø92mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:100mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

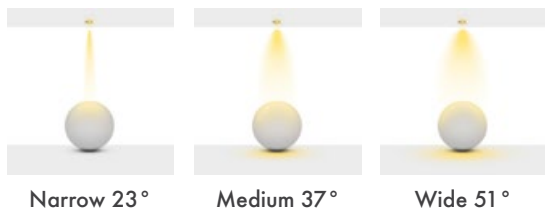

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø92mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:100mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø92mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:100mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

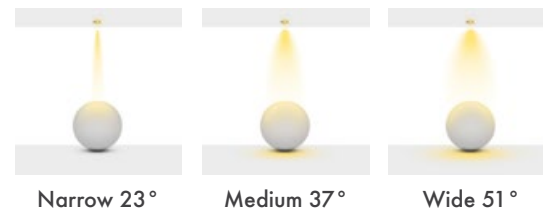

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø80mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:72mm W:90mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø80mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:72mm G:90mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

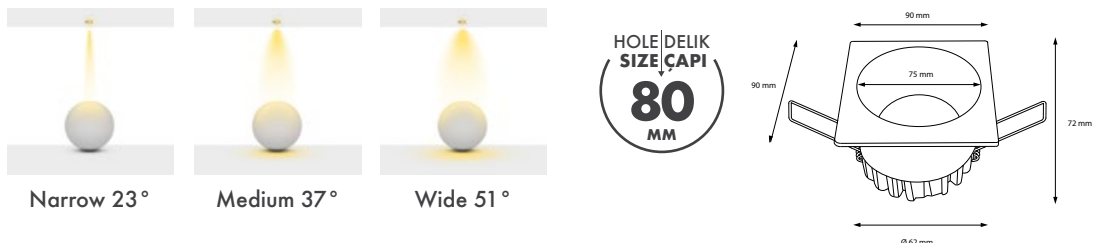

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes Uygulama Renkleri: Textured White Ral 9016, Textured Grey Ral 9006, Textured Black Ral 9005. *For more page : 550 *Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 47°

Protection Type : IP20 / IP44

Hole Size : Ø115mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:130mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 47°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø115mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:130mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

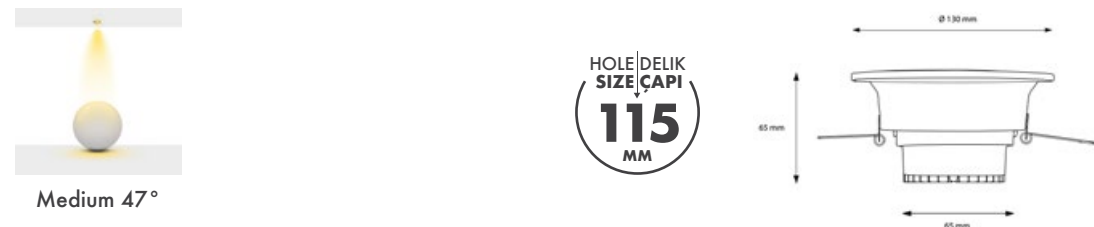

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80




Available Finishes Uygulama Renkleri: Textured White Ral 9016, Textured Grey Ral 9006, Textured Black Ral 9005. *For more page : 550 *Diğer renkler : 550

Mini FAMILY

With its small dimensions, high-quality components, well-designed products, Mini products will offer you a joyful journey to find what you desire while decorating your space. Mini family offers you to place minimal spot lights to everywhere.

Best in class mini spot lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient power led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Mini product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.

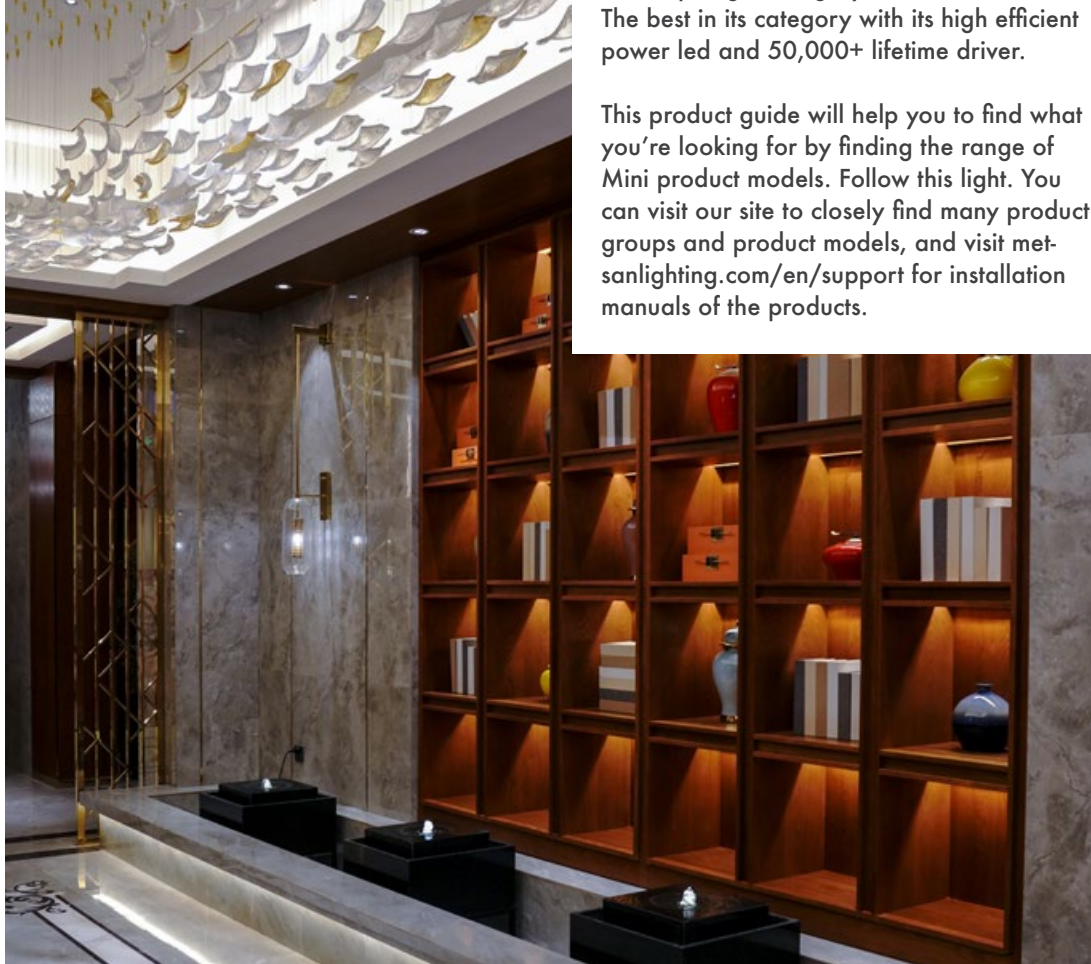

XS Mini Fixed

Recessed Light Point


P: 171



Mini Mobil

Recessed Light Point

P: 172



Mini Mobil Square

Recessed Light Point

P: 173



Mini Mobil Square Double

Recessed Light Point

P: 174



Mini Mobil Square Trio

Recessed Light Point


P: 175



XS Mini Fixed

Product Code: M 021 03

Model No: 12002103



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Lens : PMMA

Body Color : Electrostatic Powder Coating or Aluminium Body

Led : Cree Power Led

Driver : Eaglerise

Beam Options : 10° / 16° / 23°

Protection Type : IP23

Hole Size : Ø35mm

Product Dimensions : H:36mm W:39,5mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya veya Alüminyum Gövde

Led : Cree Power Led

Sürücü: Eaglerise


Açı Seçenekleri : 10° / 16° / 23°

Koruma Sınıfı : IP23

Delik Çapı : Ø35mm

Ürün Ölçüleri : Y:36mm G:39,5mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

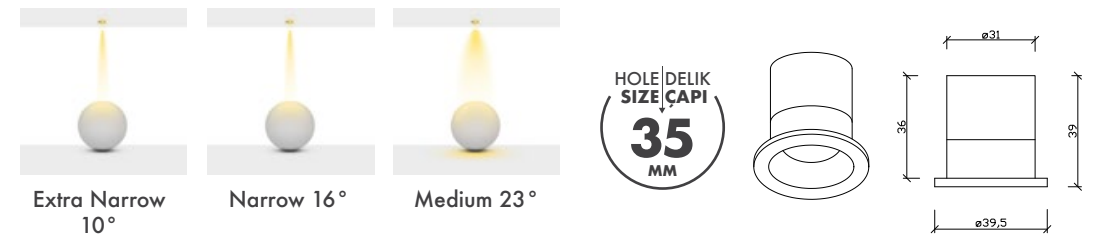

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Cree Power Led	127 lm	151 lm	164 lm	350	2 Watt	>85



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



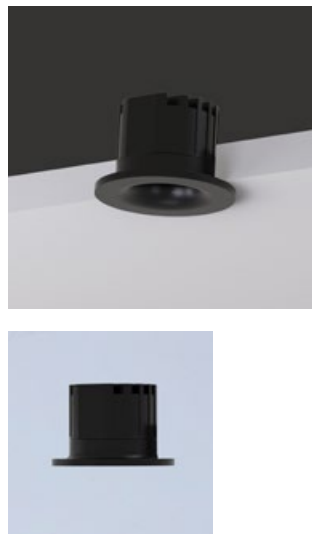

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Lens : PMMA

Body Color : Electrostatic Powder Coating or Aluminium Body

Led : Cree Power Led

Driver : Eaglerise

Beam Options : 10° / 16° / 23°

Protection Type : IP23

Hole Size : Ø35mm

Product Dimensions : H:36mm W:39,5mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya veya Alüminyum Gövde

Led : Cree Power Led

Sürücü: Eaglerise



Açı Seçenekleri : 10° / 16° / 23°

Koruma Sınıfı : IP23

Delik Çapı : Ø35mm

Ürün Ölçüleri : Y:36mm G:39,5mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

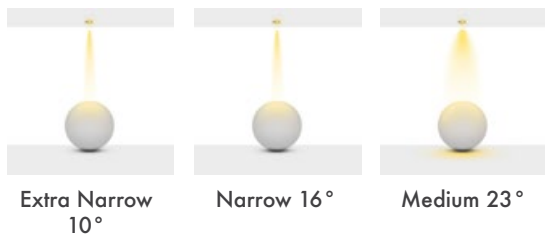

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Cree Power Led	127 lm	151 lm	164 lm	350	2 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Lens : PMMA

Body Color : Electrostatic Powder Coating or Aluminium Body

Led : Cree Power Led

Driver : Eaglerise

Beam Options : 10° / 16° / 23°

Protection Type : IP23

Hole Size : Ø45mm

Product Dimensions : H:23mm W:52mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya veya Alüminyum Gövde

Led : Cree Power Led

Sürücü: Eaglerise



Açı Seçenekleri : 10° / 16° / 23°

Koruma Sınıfı : IP23

Delik Çapı : Ø45mm

Ürün Ölçüleri : Y:23mm G:52mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

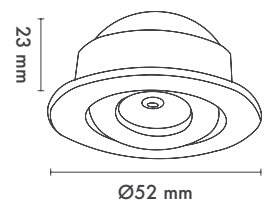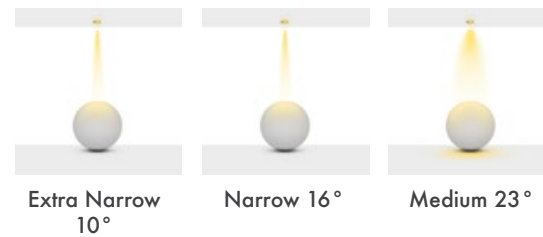

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Cree Power Led	127 lm	151 lm	164 lm	350	2 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005


*For more page : 550
*Diğer renkler : 550





Mini Mobil Square

Product Code: M 020 04
Model No: 12002004

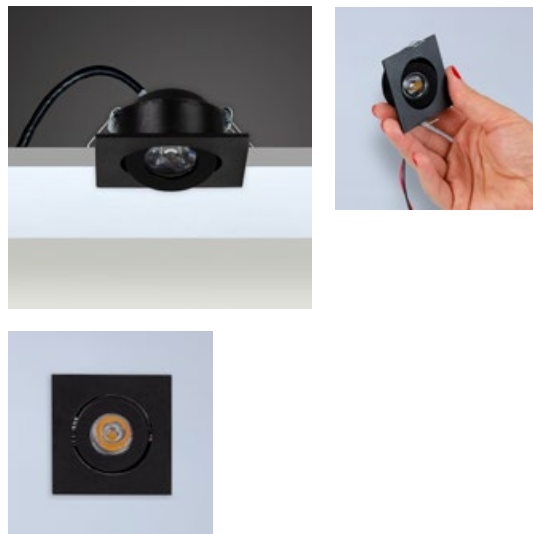

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Lens : PMMA

Body Color : Electrostatic Powder Coating or Aluminium Body

Led : Cree Power Led

Driver : Eaglerise

Beam Options : 10° / 16° / 23°

Protection Type : IP23

Hole Size : Ø45mm

Product Dimensions : H:20mm W:52mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya veya Alüminyum Gövde

Led : Cree Power Led

Sürücü: Eaglerise


Açı Seçenekleri : 10° / 16° / 23°

Koruma Sınıfı : IP23

Delik Çapı : Ø45mm

Ürün Ölçüleri : Y:20mm G:52mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

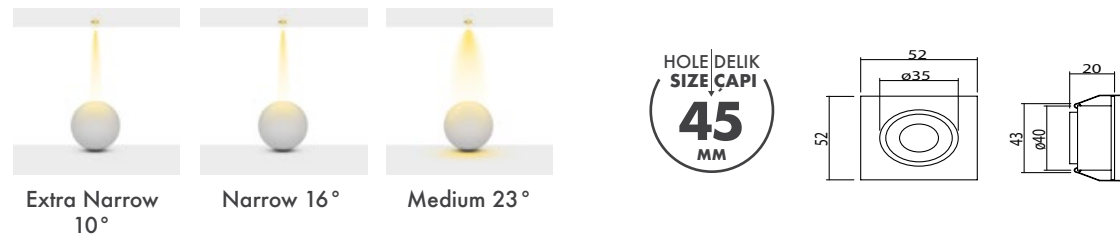

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Cree Power Led	127 lm	151 lm	164 lm	350	2 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006


Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Mini Mobil Square Double

Product Code: M 022 04
Model No: 12002204

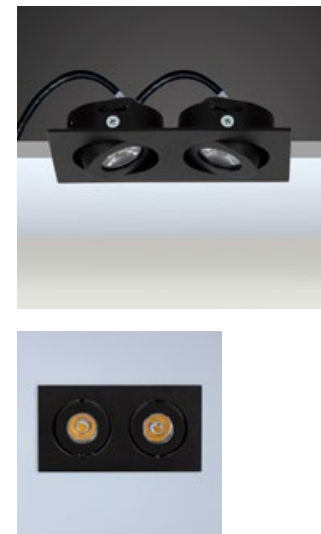

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Lens : PMMA

Body Color : Electrostatic Powder Coating or Aluminium Body

Led : Cree Power Led

Driver : Eaglerise

Beam Options : 10° / 16° / 23°

Protection Type : IP23

Hole Size : Ø45mm

Product Dimensions : H:20mm W:52mm L:97mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya veya Alüminyum Gövde

Led : Cree Power Led

Sürücü: Eaglerise


Açı Seçenekleri : 10° / 16° / 23°

Koruma Sınıfı : IP23

Delik Çapı : Ø45mm

Ürün Ölçüleri : Y:20mm G:52mm U:97mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

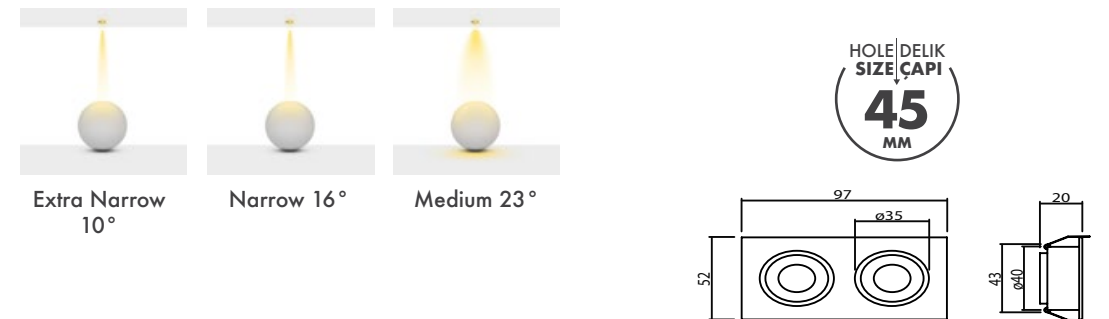

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Cree Power Led	254 lm	302lm	328 lm	350	4 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Mini Mobil Square Trio

Product Code: M 023 04

Model No: 12002304



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Lens : PMMA

Body Color : Electrostatic Powder Coating or Aluminium Body

Led : Cree Power Led

Driver : Eaglerise

Beam Options : 10° / 16° / 23°

Protection Type : IP23

Hole Size : Ø45mm

Product Dimensions : H:20mm W:52mm L:142mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya veya Alüminyum Gövde

Led : Cree Power Led

Sürücü: Eaglerise


Açı Seçenekleri :10° / 16° / 23°

Koruma Sınıfı : IP23


Delik Çapı : Ø45mm

Ürün Ölçüleri : Y:20mm G:52mm U:142mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

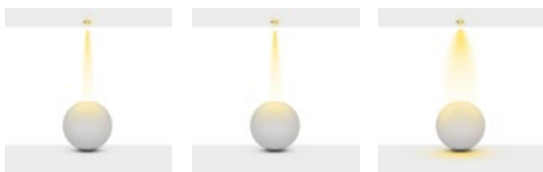

Extra Narrow 10° Narrow 16° Medium 23°

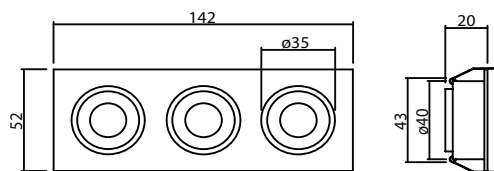

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Cree Power Led	381 lm	453 lm	492 lm	350	6 Watt	>85

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

ELENI FAMILY

With its professional finishing, high-quality components, well-designed products, Eleni products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient power led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Eleni product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Eleni Fixed

Recessed Spotlight

P: 177



Eleni Reflector

Recessed Spotlight

P: 178



Eleni V2 Reflector

Recessed Spotlight

P: 179



Eleni Deep Lens

Recessed Spotlight

P: 180



Eleni Deep Reflector

Recessed Spotlight

P: 181



Eleni Reflector Surface

Surface Mounted Spotlight

P: 182



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 19° / 40°

Protection Type : IP20 / IP44

Hole Size : Ø70mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:90mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 19° / 40°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø70mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:90mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

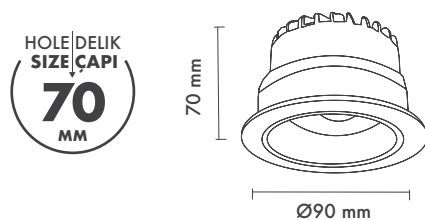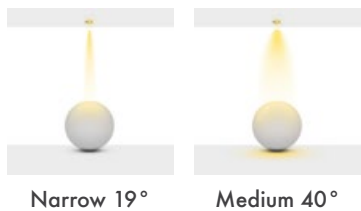

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:100mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:100mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

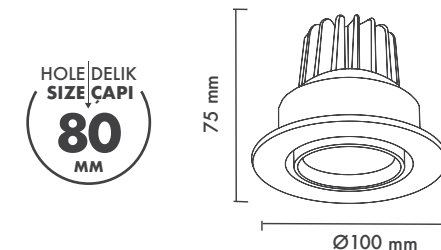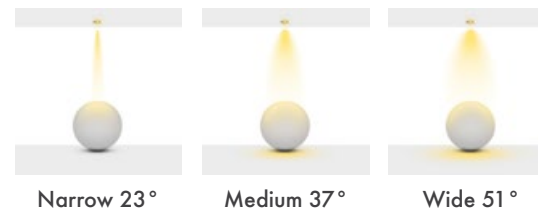

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:100mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:100mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

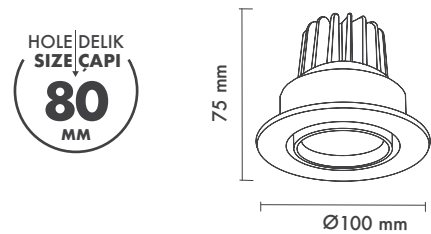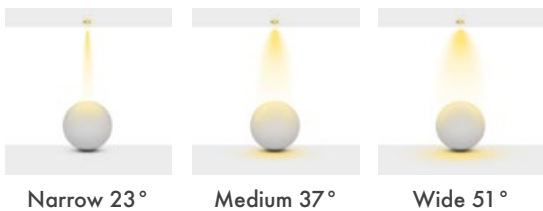

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80




Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Lens : Ledil Carmen 50

Beam Options :

Black : 12° / 24° / 35° / 55°

White : 11° / 25° / 35° / 50°

Protection Type : IP20 / IP23 (Visible Surface After Installation)

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:80mm W:100mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Lens : Ledil Carmen 50

Açı Seçenekleri :

Siyah : 12° / 24° / 35° / 55°

Beyaz : 11° / 25° / 35° / 50°


Koruma Sınıfı : IP20 / IP23 (Kurulumdan Sonra Görünür Yüze)

Delik Çapı : Ø85mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:80mm G:100mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

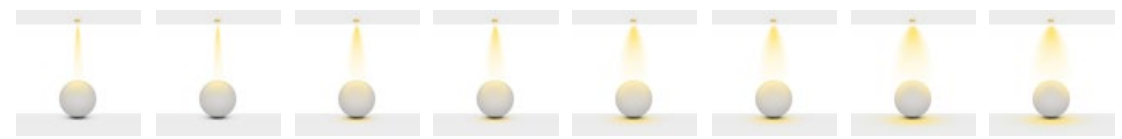

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:85mm W:100mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:85mm G:100mm

Beam Informations And Technicals / Teknik ve Açısız Bilgiler

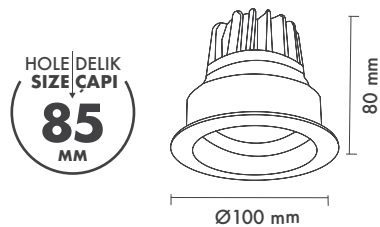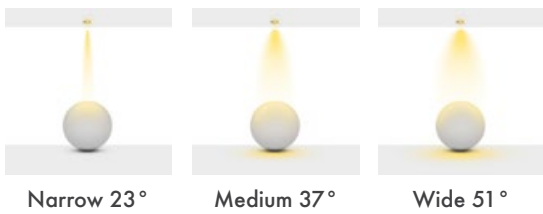

	2700K Lumen	3000K Lumen	4000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:150mm W:90mm

Montaj Tipi : Sıva Üstü / Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise



Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:150mm G:90mm

Beam Informations And Technicals / Teknik ve Açısız Bilgiler

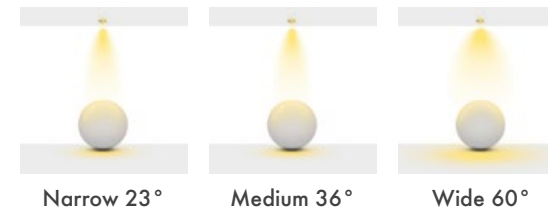

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



NEPTUNE & ROYAL FAMILY

With its deep light source, high-quality components, well-designed products, Neptune and Royal products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient power led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Neptune and Royal product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Neptune Single
Recessed Spotlight

P: 184



Neptune Double
Recessed Spotlight

P: 185



Neptune Trio
Recessed Spotlight

P: 186



Royal Round
Recessed Spotlight

P: 187



Royal Round Double
Recessed Spotlight

P: 188



Royal Square
Recessed Spotlight

P: 189



Royal Square Double
Recessed Spotlight

P: 190



Royal Square Trio
Recessed Spotlight

P: 191



Neptune Single

Product Code: M 200-13 SC10
Model No: 12020013



Various Inside Finishes
Kademe Renklendirilebilir

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Body and Aluminium Injection Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:85mm W:95mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Enjeksiyon Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:85mm G:95mm


Beam Informations And Technicals / Teknik ve Açılal Bilgiler

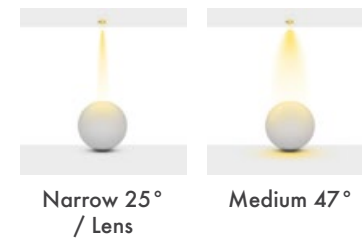

Narrow 25°
/ Lens

Medium 47°

HOLE/DELİK
SIZE/ÇAPI
85
MM

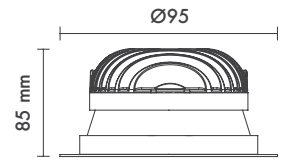

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Neptune Double

Product Code: M 200-14 SC10
Model No: 12020014

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø85mm x 2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:85mm W:1192mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm x 2

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:85mm G:192mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

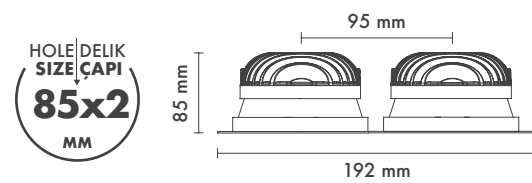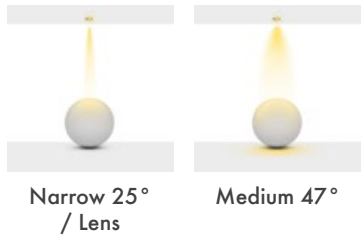

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1420 lm	1540 lm	1660 lm	180	14 Watt	>80
Samsung Cob Led	2020 lm	2140 lm	2260 lm	250	20 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Neptune Trio

Product Code: M 200-15 SC10
Model No: 12020015

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø85mm x 3

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:85mm W:285mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm x 3

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:85mm G:285mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

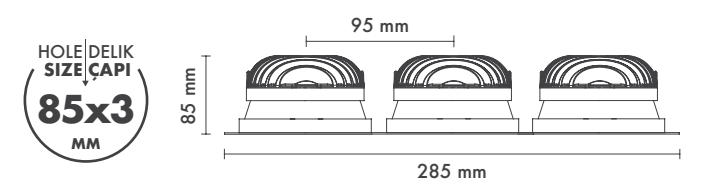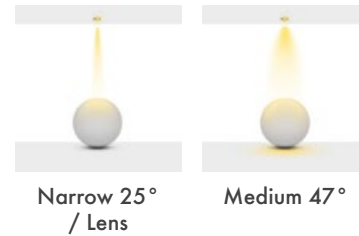

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2130 lm	2310 lm	2490 lm	180	21 Watt	>80
Samsung Cob Led	3030 lm	3210 lm	3390 lm	250	30 Watt	>80



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



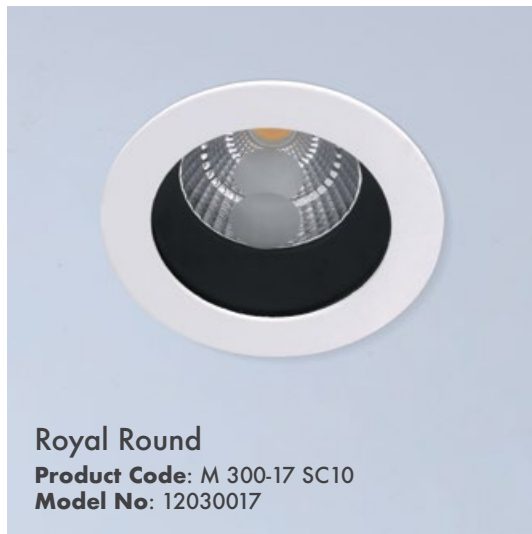

Various Inside Finishes
 Kademe Renklendirilebilir

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:85mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:85mm G:117mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

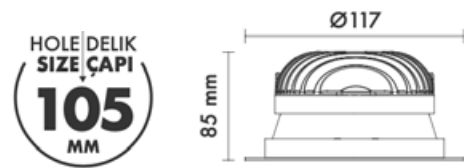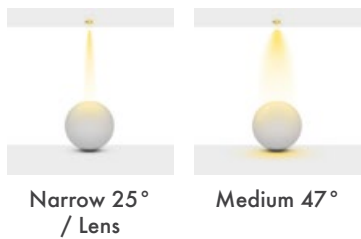

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
 Uygulama Renkleri

Textured White
 Ral 9016

Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø105mm x 2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:85mm W:234mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm x 2

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:85mm G:234mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

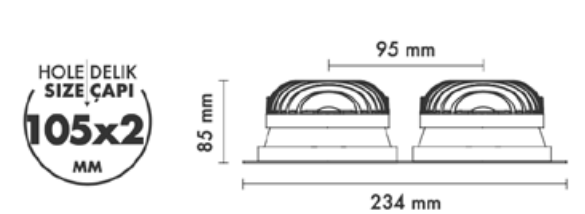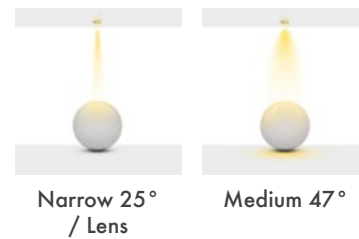

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1420 lm	1540 lm	1660 lm	180	14 Watt	>80
Samsung Cob Led	2020 lm	2140 lm	2260 lm	250	20 Watt	>80



Available Finishes
 Uygulama Renkleri

Textured White
 Ral 9016

Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:90mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:90mm G:117mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

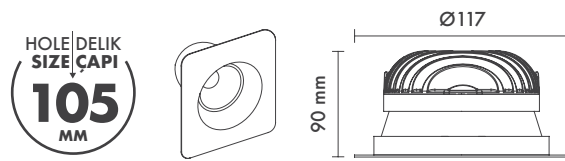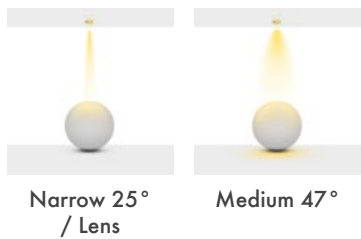

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
 Uygulama Renkleri

Textured White
 Ral 9016

Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø105mm x 2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:90mm W:234mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm x 2

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:90mm G:234mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

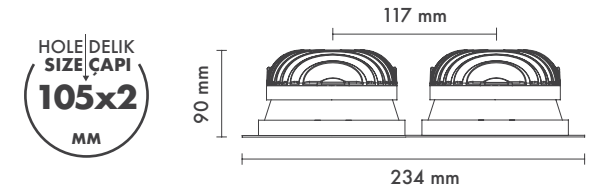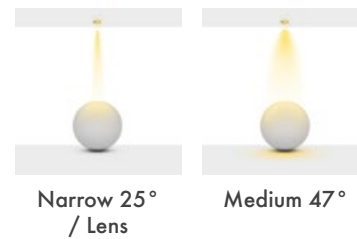

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1420 lm	1540 lm	1660 lm	180	14 Watt	>80
Samsung Cob Led	2020 lm	2140 lm	2260 lm	250	20 Watt	>80



Available Finishes
 Uygulama Renkleri

Textured White
 Ral 9016

Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550





Royal Sqaure Trio

Product Code: M 300-45 SC10
Model No: 12030045

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø105mm x 3

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:90mm W:350mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm x 3


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:90mm G:350mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

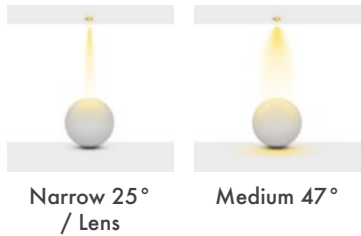

HOLE|DELİK
SIZE|ÇAPI
105x3
MM

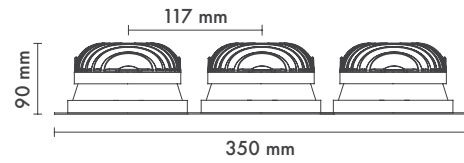

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2130 lm	2310 lm	2490 lm	180	21 Watt	>80
Samsung Cob Led	3030 lm	3210 lm	3390 lm	250	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Aries Round

Product Code: M 300-21 OC10
Model No: 12030021

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:117mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

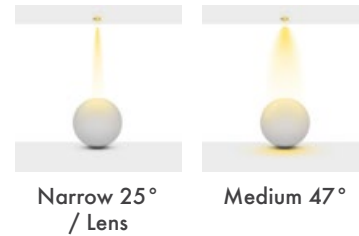

HOLE|DELİK
SIZE|ÇAPI
105
MM

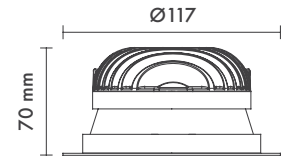

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Body and Aluminium Injection Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:120mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Gövde ve Alüminyum Enjeksiyon Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:120mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

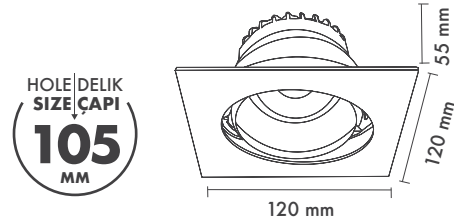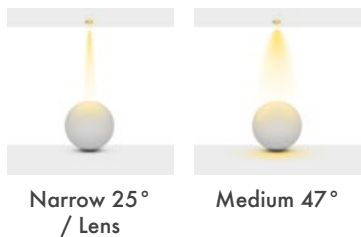

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
 Uygulama Renkleri

Textured White
 Ral 9016


Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550




LUXIS FAMILY

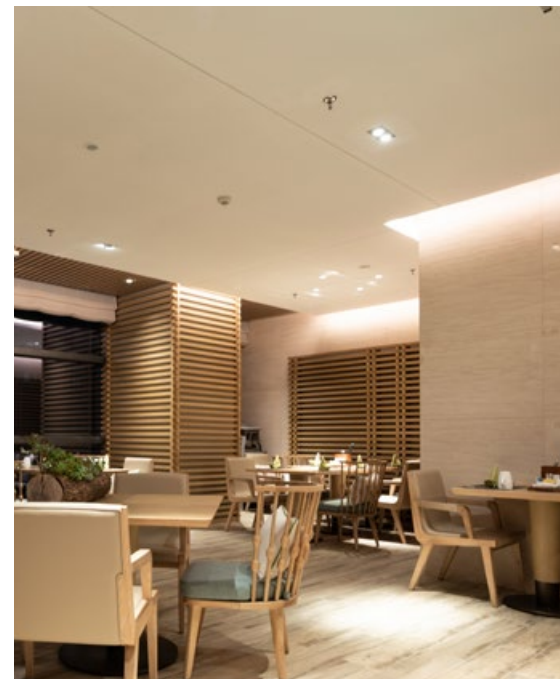

With its tiltable and rotatable head, high-quality components, well-designed products, Luxis products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient power led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Luxis product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/ support for installation manuals of the products.



Luxis Single

Recessed Spotlight

P: 195



Luxis Double

Recessed Spotlight


P: 196



Luxis Trio

Recessed Spotlight

P: 197



Luxis Trimless Single

Trimless Spotlight

P: 198



Luxis Trimless Double

Trimless Spotlight

P: 199



Luxis Trimless Trio

Trimless Spotlight

P: 200



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : ∅105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:90mm W:120mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : ∅105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:90mm G:120mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : ∅105mm x 190mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:90mm W:240mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : ∅105mm x 190mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:90mm G:240mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1420 lm	1540 lm	1660 lm	180	14 Watt	>80
Samsung Cob Led	2020 lm	2140 lm	2260 lm	250	20 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Luxis Trio

Product Code: MA 827-11 03
Model No: 120827113

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø105mm x 265mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:90mm W:360mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm x 265mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:90mm G:360mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2130 lm	2310 lm	2490 lm	180	21 Watt	>80
Samsung Cob Led	3030 lm	3210 lm	3390 lm	250	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Luxis Trimless Single

Product Code: MA 827-12 01
Model No: 120827121

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø90mm x 90mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:90mm W:90mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø90mm x 90mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:90mm G:90mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

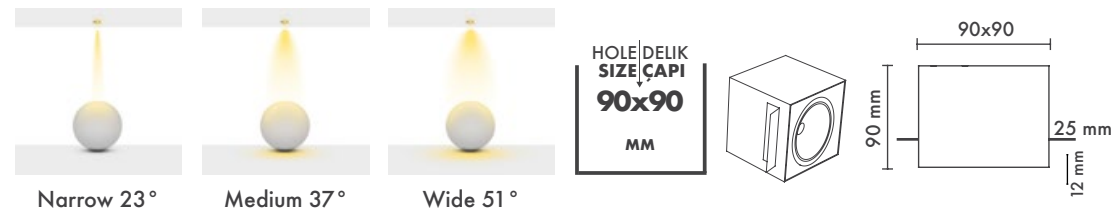

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø90mm x 170mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:90mm W:170mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø90mm x 170mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:90mm G:170mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

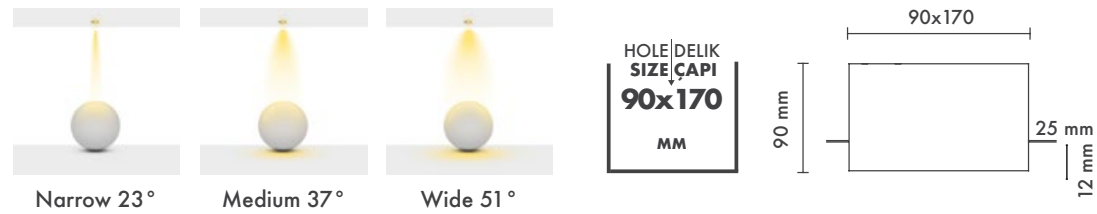

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1420 lm	1540 lm	1660 lm	180	14 Watt	>80
Samsung Cob Led	2020 lm	2140 lm	2260 lm	250	20 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø90 x 250mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:90mm W:250mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø90 x 250mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:90mm G:250mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

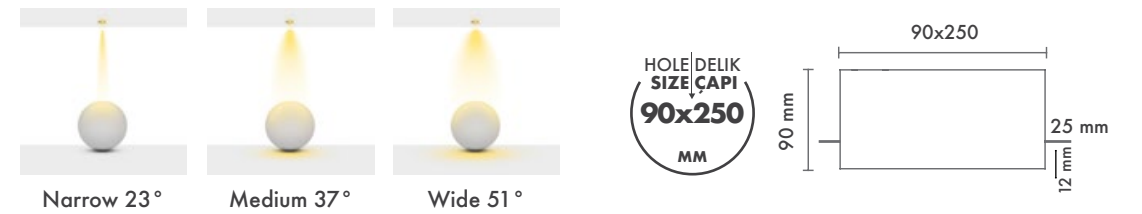

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2130 lm	2310 lm	2490 lm	180	21 Watt	>80
Samsung Cob Led	3030 lm	3210 lm	3390 lm	250	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



BINNO FAMILY

With its tiltable and rotatable head, high-quality components, well-designed products, Binno products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Binno product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Binno Round Single
Recessed Spotlight

P: 202



Binno Round Double
Recessed Spotlight

P: 203



Binno Round Trio
Recessed Spotlight

P: 204



Binno Square Single
Recessed Spotlight

P: 205



Binno Square Double
Recessed Spotlight

P: 206



Binno Square Trio
Recessed Spotlight

P: 207



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:117mm

Beam Informations And Technicals / Teknik ve Açısız Bilgiler

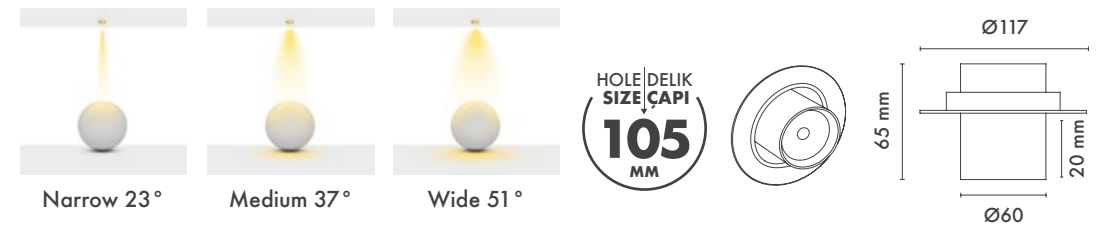

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø105mmx2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:273mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mmx2

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:273mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

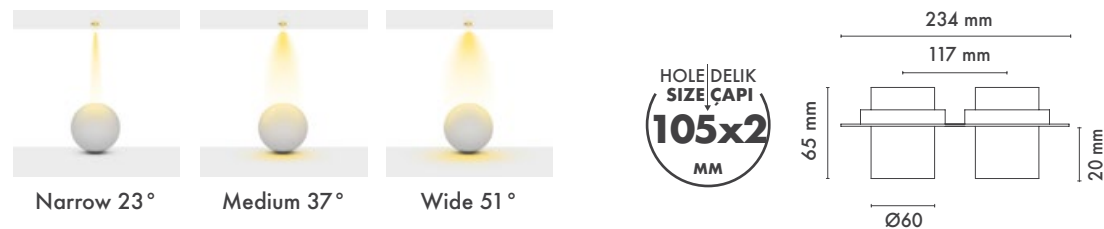

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1420 lm	1540 lm	1660 lm	180	14 Watt	>80
Samsung Cob Led	2020 lm	2140 lm	2260 lm	250	20 Watt	>80




Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

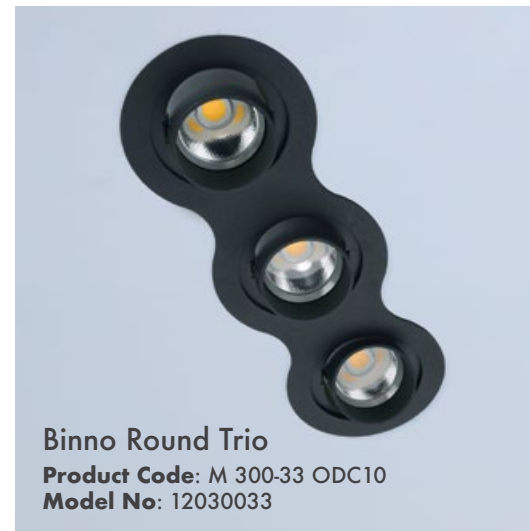

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø105mmx3

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:365mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mmx3

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:365mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2130 lm	2310 lm	2490 lm	180	21 Watt	>80
Samsung Cob Led	3030 lm	3210 lm	3390 lm	250	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:117mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

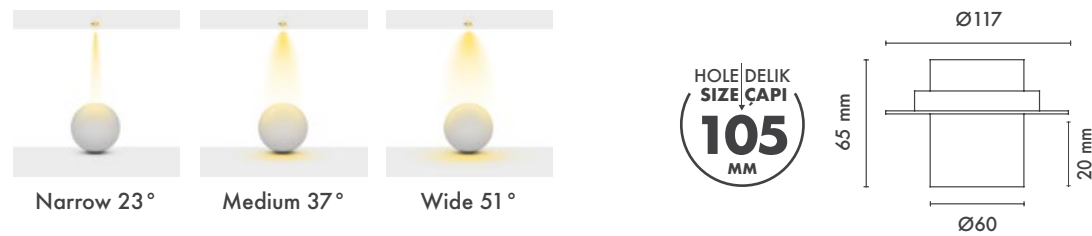

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø105mmx2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:273mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mmx2

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:273mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

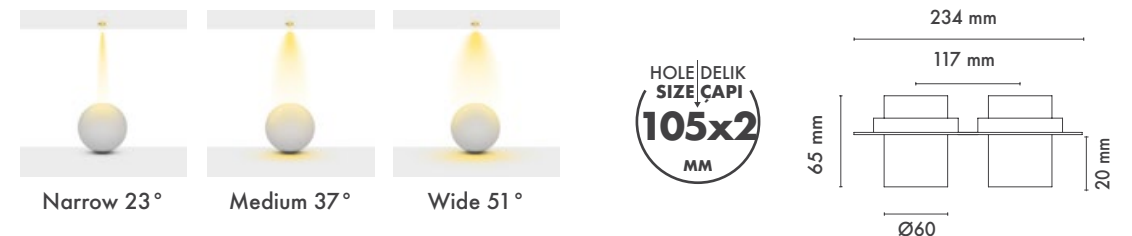

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1420 lm	1540 lm	1660 lm	180	14 Watt	>80
Samsung Cob Led	2020 lm	2140 lm	2260 lm	250	20 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø105mmx3

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:65mm W:365mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mmx3

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:65mm G:365mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

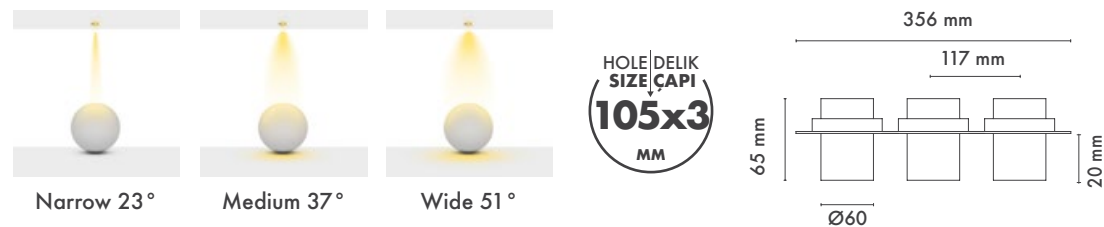

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2130 lm	2310 lm	2490 lm	180	21 Watt	>80
Samsung Cob Led	3030 lm	3210 lm	3390 lm	250	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



ZOOM FAMILY

With its long and small round shape, high-quality components, well-designed products, Zoom products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Zoom product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Zoom 5'' Adjustable
Recessed Spotlight

P: 209



Zoom Recessed
Semi Recessed Spotlight

P: 210



Zoom Fixed Trimless
Trimless Spotlight

P: 211



Zoom Adjustable Trimless
Trimless Spotlight

P: 212



Zoom Surface
Surface Mounted Spotlight

P: 213




Zoom Adjustable Surface
Surface Mounted Spotlight

P: 214



Zoom Adjustable Surface V2
Surface Mounted Spotlight

P: 215



Zoom Square Surface
Surface Mounted Spotlight

P: 216



Zoom Track
Track Spotlight

P: 217



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø140

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:85mm W:159mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø140

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:85mm G:159mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø40mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:100mm W:60mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø40mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:100mm G:60mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

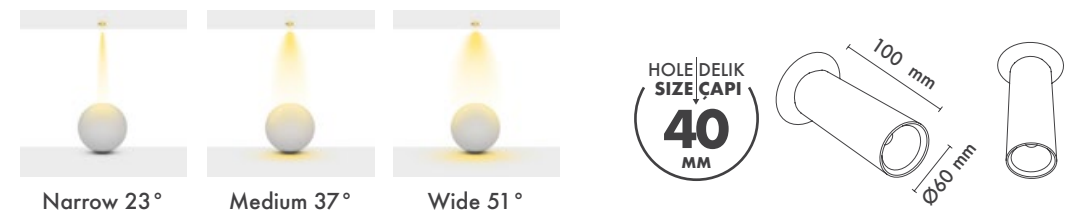

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø82mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:120mm W:80mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø82mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:120mm G:80mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

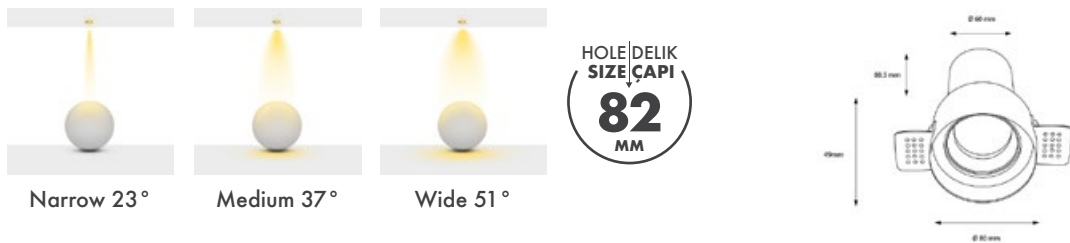

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø92mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:95mm W:90mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø92mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:95mm G:90mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

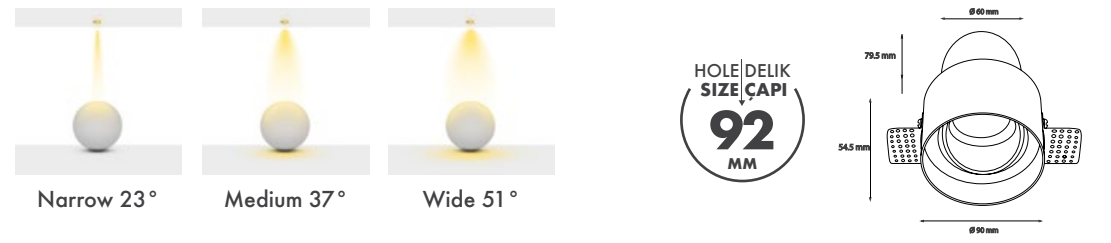

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Zoom Surface

Product Code: MSY-11 060 C10
Model No: 13006011

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:160mm W:60mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise



Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:160mm G:60mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

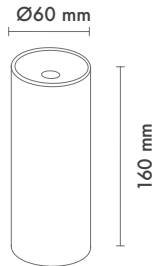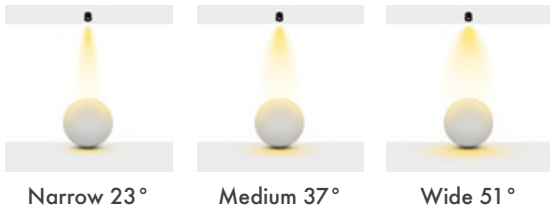

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Zoom Adjustable Surface

Product Code: MSY-70 060
Model No: 13006070



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:200mm W:60mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise



Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:200mm G:60mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

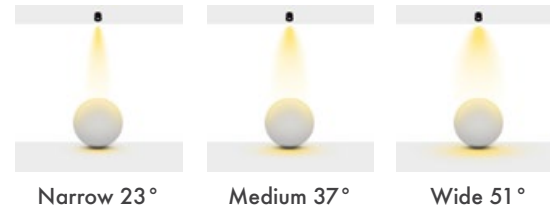

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80

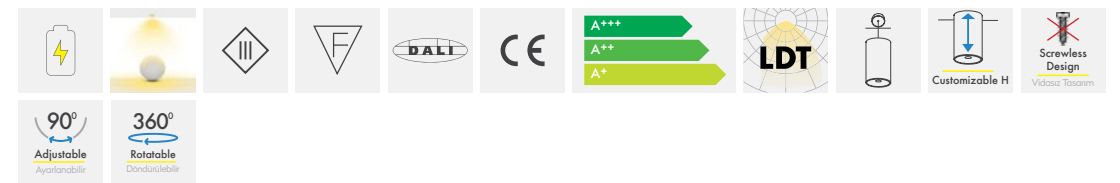

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Zoom Adjustable Surface V2

Product Code: MSY-93 060
Model No: 13006093



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:168mm W:60mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise



Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:168mm G:60mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

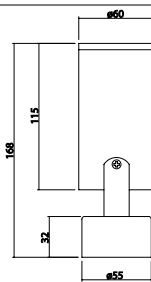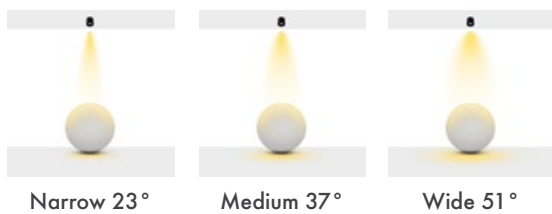

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Zoom Square Surface

Product Code: MSK- 11 60 C10
Model No: 13006011K

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspendanr

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:130mm W:60mm

Montaj Tipi : Sıva Üstü / Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise



Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:130mm G:60mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

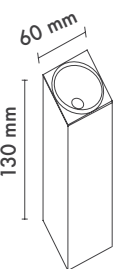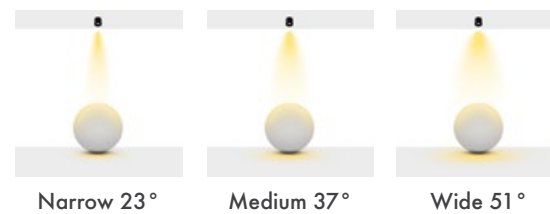

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



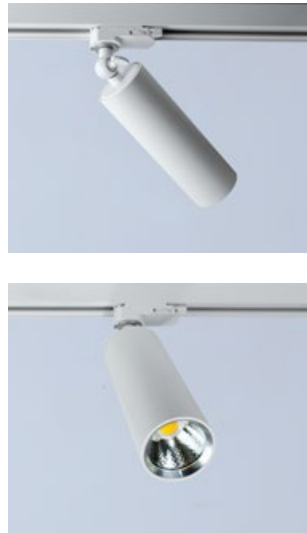

Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:180mm W 60mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20

Soket Tipleri : Monophase / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : U:130mm G: 60mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

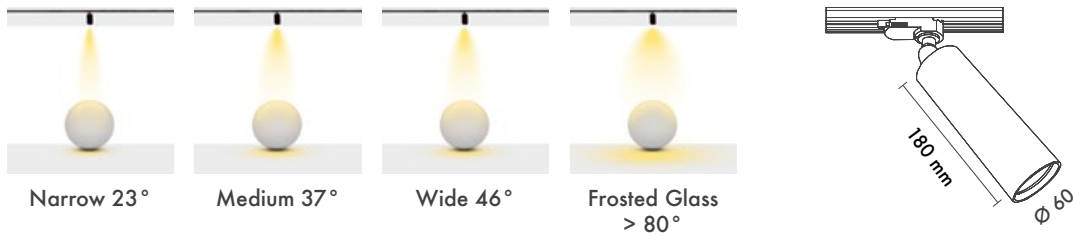

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	*CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016


Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



ALYES FAMILY

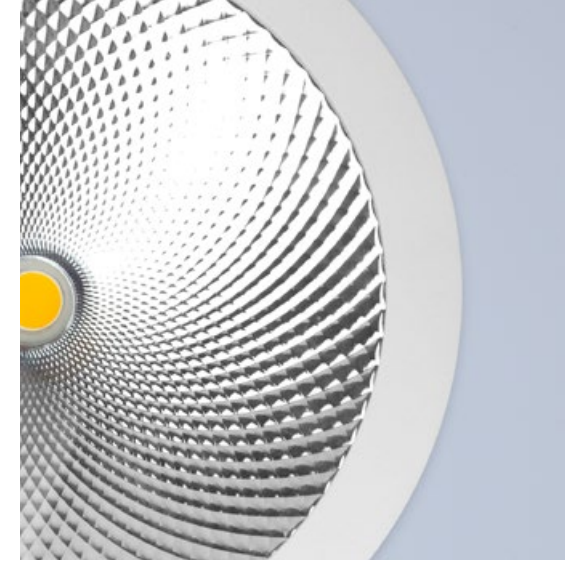

Classic but with high-quality components, well-designed products. Although its a standard model, it has extraordinary quality. Ayles products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Ayles product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Ayles 2''

Recessed Spotlight

P: 219



Ayles 3''

Recessed Spotlight

P: 220



Ayles 5''

Recessed Spotlight

P: 221



Ayles 8''

Recessed Spotlight

P: 222



Ayles Square 3''

Surface Mounted Spotlight

P: 223



Ayles Surface 2''

Surface Mounted Spotlight

P: 224



Ayles Surface 3''

Surface Mounted Spotlight

P: 225



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 / IP44

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:100mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø85mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:100mm

Beam Informations And Technicals / Teknik ve Açısız Bilgiler

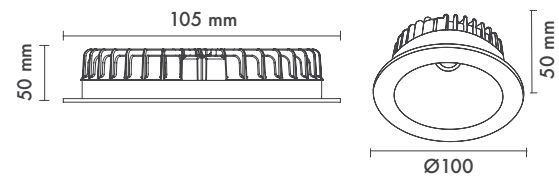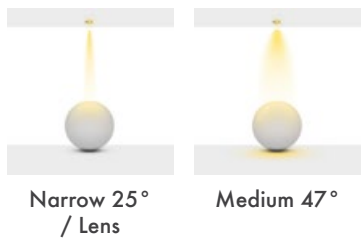

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
 Uygulama Renkleri

Textured White
 Ral 9016

Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 85°

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 85°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:117mm

Beam Informations And Technicals / Teknik ve Açısız Bilgiler

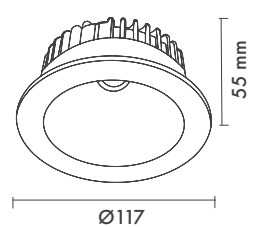

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
 Uygulama Renkleri


Textured White
 Ral 9016

Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550



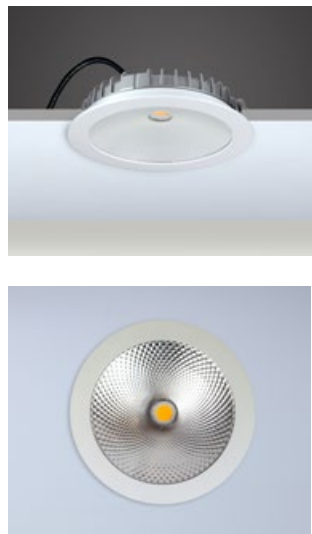

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 90°

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:38mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 90°




Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:38mm G:173mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

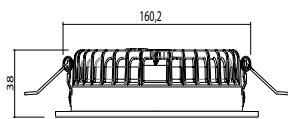

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2400 lm	2500 lm	2600 lm	500	20 Watt	>80




Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

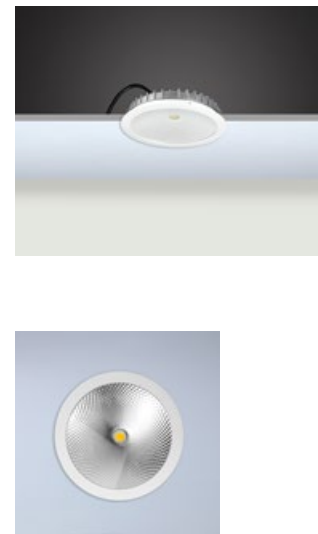

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 90°

Protection Type : IP20 / IP44

Hole Size : Ø214mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:44mm W:229mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 90°




Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø214mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:44mm G:229mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	3600 lm	3750 lm	3900 lm	700	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 85°

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:117mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 85°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:117mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

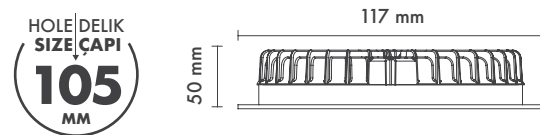

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 24° / 47°

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:150mm W:90mm

Montaj Tipi : Sıva Üstü / Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise



Açı Seçenekleri : 24° / 47°

Koruma Sınıfı : IP20 / IP44


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:150mm G:90mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

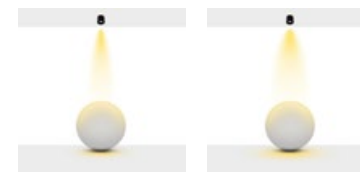

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80

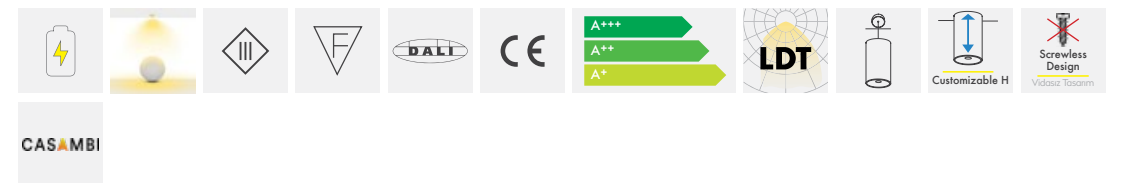

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Alyes Surface 3''

Product Code: MSY-26 100 C10

Model No: 13010026

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 24° / 47°

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:150mm W:100mm

Montaj Tipi :Sıva Üstü / Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise


Açı Seçenekleri :24° / 47°

Koruma Sınıfı : IP20 / IP44


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:150mm G:100mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

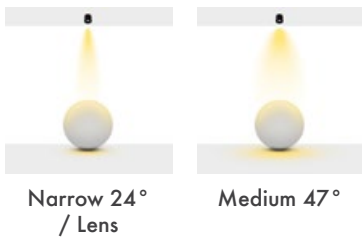Narrow 24°
/ Lens

Medium 47°

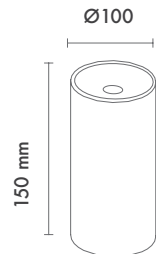

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80

Available Finishes
Uygulama Renkleri
 Textured White
Ral 9016

 Textured Grey
Ral 9006

 Textured Black
Ral 9005

 *For more page : 550
*Diğer renkler : 550


PINHOLE FAMILY

With its hole on the frame to prevent glare, high-quality components, well-designed products, Pinhole products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Pinhole product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Pinhole/A Spot

Recessed Pinhole Spotlight

P: 227



Pinhole/B Spot

Recessed Pinhole Spotlight

P: 228



Pinhole/D Spot

Recessed Pinhole Spotlight

P: 229



Pinhole/E Spot

Recessed Pinhole Spotlight

P: 230



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Injection Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 36°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø80mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:85mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Enjeksiyon Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 36°


Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø80mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:85mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

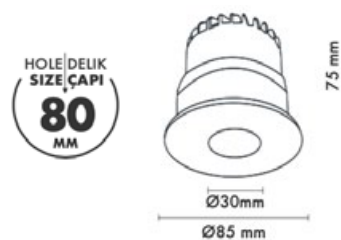

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Injection Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 36°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø80mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:85mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Enjeksiyon Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 36°

Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø80mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:85mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Injection Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 36°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø80mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:85mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Enjeksiyon Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 36°


Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø80mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:85mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



Assymmetric

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Injection Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 47° / 51°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø80mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:97mm W:98mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Enjeksiyon Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 47° / 51°


Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø80mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:97mm G:98mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

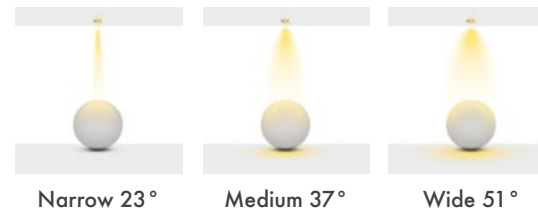

HOLE/DELİK
SIZE/ÇAPI
82
MM

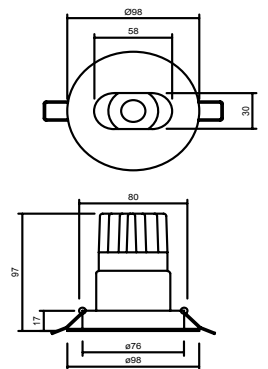

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø82mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:56mm W:92,5mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø82mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:56mm G:92,5mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

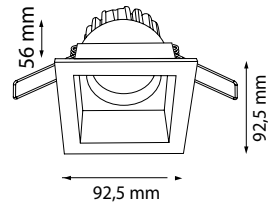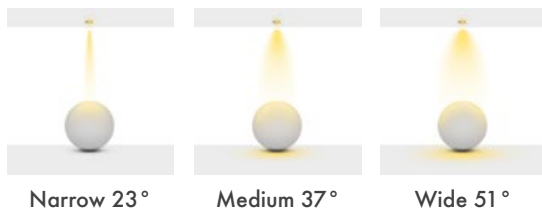

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø70mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:100mm W:87mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø70mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:100mm G:87mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

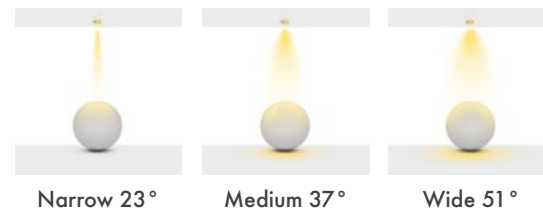

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : Assymetrical

Protection Type : IP20

Hole Size : Ø85mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:67mm W:98mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : Asimetrik


Koruma Sınıfı : IP20

Delik Çapı : Ø85mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:67mm G:98mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



Assymmetric

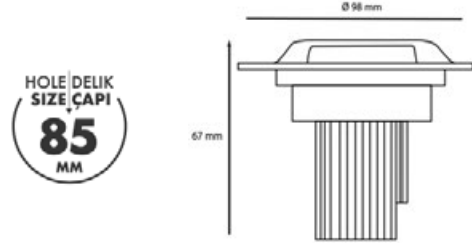

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	510 lm	570 lm	630 lm	180	7 Watt	>80
Samsung Cob Led	810 lm	870 lm	930 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : Ø90mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:125mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø90mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:125mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler





Narrow 23°

Medium 37°

Wide 51°

HOLE|DELİK
SIZE|ÇAPI
90
MM



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 15°

Protection Type : IP20 / IP44

Hole Size : Ø90mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:125mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 15°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø90mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:125mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Narrow 15°

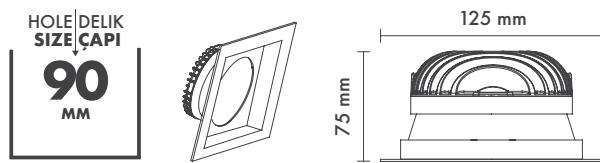

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 50°

Protection Type : IP20 / IP44

Hole Size : Ø95x95mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:100mm W:111mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 50°

Koruma Sınıfı : IP20 / IP44

Delik Ölçüsü : Ø95x95mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:100mm G:111mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Medium 50°

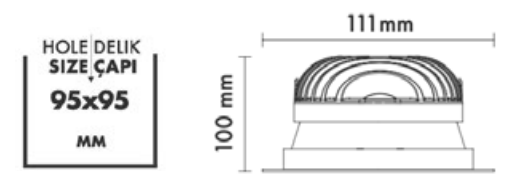

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20 /IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:125mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 25° / 47°

Koruma Sınıfı : IP20 /IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:125mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Dkp Metal Body and Aluminium Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 37° / 51°

Protection Type : IP20 / IP44

Hole Size : ∅75mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:82mm W:98mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Dkp Metal Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 37° / 51°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : ∅75mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:82mm G:98mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

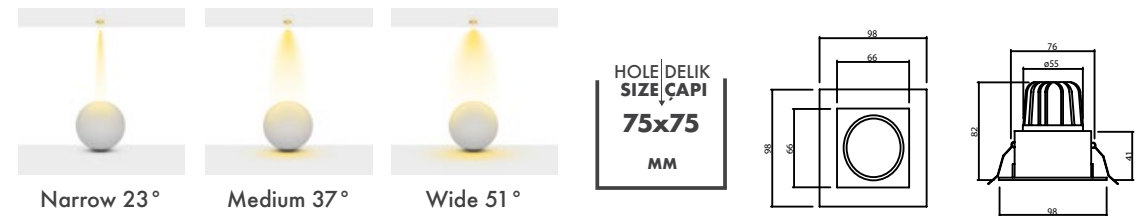

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550




SOPHIA FAMILY

With curved frame, high-quality components, well-designed products, Sophia products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum injection frame and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Sophia product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.

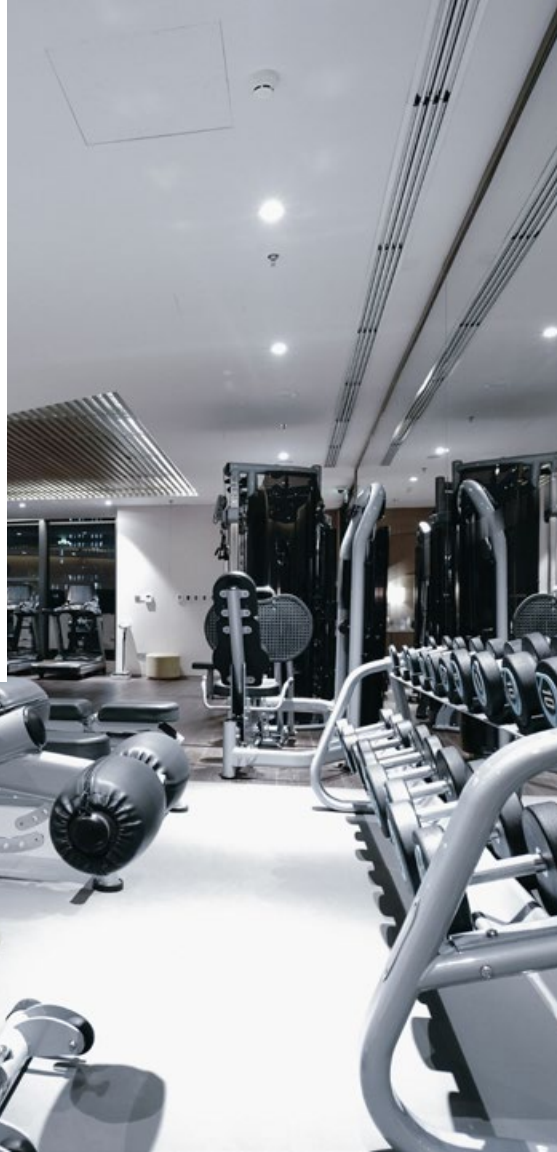

Sophia 3''
Recessed Spotlight

P: 240



Sophia Deep 4''
Recessed Spotlight

P: 241



Sophia 100 Surface
Surface Mounted Spotlight

P: 242



Sophia 125 Surface
Surface Mounted Spotlight

P: 243



Sophia 3''
Product Code: M 300-97 SC20
Model No: 12030097



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 36° / 60°

Protection Type : IP20 / IP44

Hole Size : Ø105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:79mm W:118mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 36° / 60°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:79mm G:118mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler





Narrow 23°


Medium 36°

Wide 60°

HOLE|DELİK
SIZE|ÇAPI
105
MM



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1625 lm	1725 lm	1825 lm	350	15 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



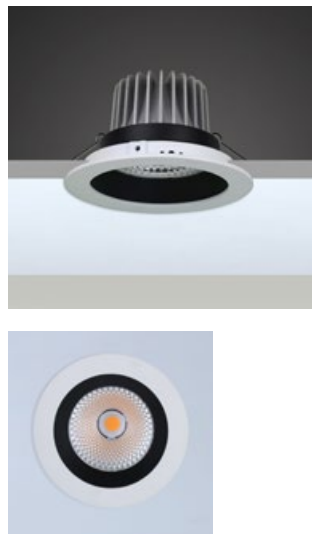

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 36° / 60°

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:87mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 36° / 60°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:87mm G:147mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1625 lm	1725 lm	1825 lm	350	15 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 36° / 60°

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:170mm W:100mm

Montaj Tipi : Sıva Üstü / Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise


Açı Seçenekleri : 23° / 36° / 60°

Koruma Sınıfı : IP20 / IP44


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:170mm G:100mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

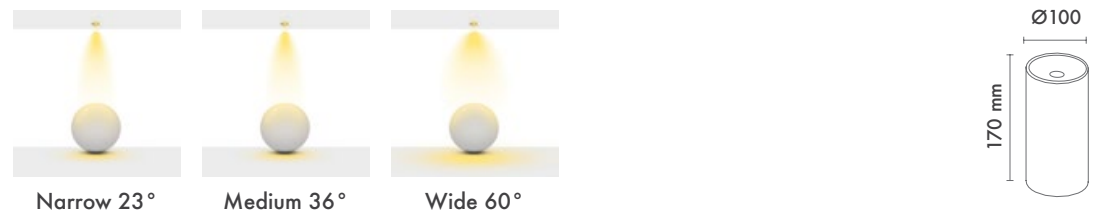

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1625 lm	1725 lm	1825 lm	350	15 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80

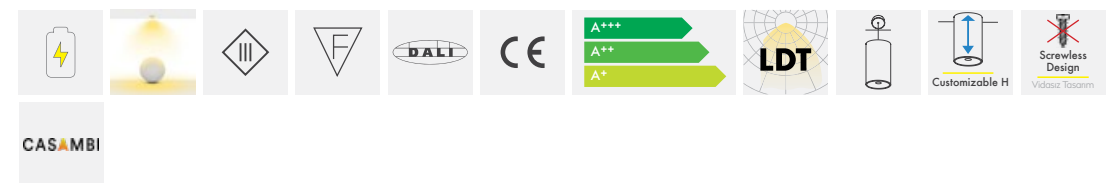

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Sophia 125 Surface

Product Code: MSY-89 125 C20
Model No: 13012589



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 36° / 60°

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:170mm W:100mm

Montaj Tipi : Sıva Üstü / Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise



Açı Seçenekleri : 23° / 36° / 60°

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:170mm G:100mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

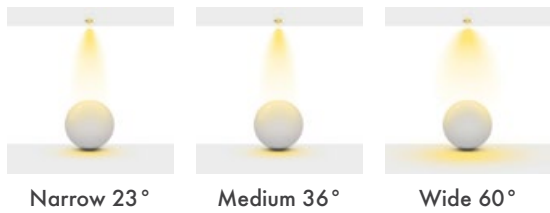

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1625 lm	1725 lm	1825 lm	350	15 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80



CASAMBI

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



BONATTI FAMILY

With its miscellaneous product types, high-quality components, well-designed products, Bonatti products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum extrusion body and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Bonatti product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Bonatti Round Single
Recessed Spotlight

P: 246



Bonatti Round Double
Recessed Spotlight

P: 247



Bonatti Square Single
Recessed Spotlight

P: 248



Bonatti Square Double
Recessed Spotlight

P: 249



Bonatti 10 Track Mini
Track Spotlight

P: 250



Bonatti 10 Track
Track Spotlight

P: 251



Bonatti 30 Track
Track Spotlight

P: 252



Bonatti Track 30 IT
Track Spotlight

P: 254



Bonatti 30 Box D
Track Spotlight

P: 256



Bonatti 30 Box L
Track Spotlight

P: 258



Bonatti 30 Box Y
Track Spotlight

P: 260



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:105mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:105mm G:147mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

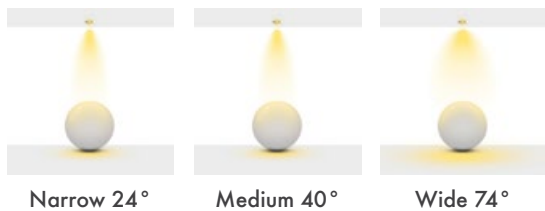

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20 / IP44

Hole Size : Ø130mmx2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mmx2

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:173mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

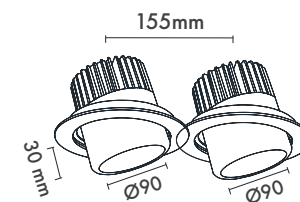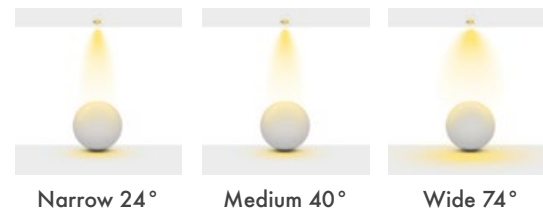

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	4400 lm	4600 lm	4800 lm	1000	40 Watt	>80
Samsung Cob Led	7000 lm	7200 lm	7400 lm	1400	60 Watt	>80
Samsung Cob Led	4000 lm	4200 lm	4400 lm	1000	40 Watt	>90
Samsung Cob Led	6000 lm	6200 lm	6400 lm	1400	60 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:173mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

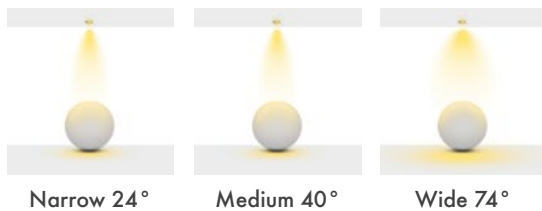

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise


Beam Options : 28° / 40° / 74°

Protection Type : IP20 / IP44

Hole Size : Ø130mmx2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:173mm

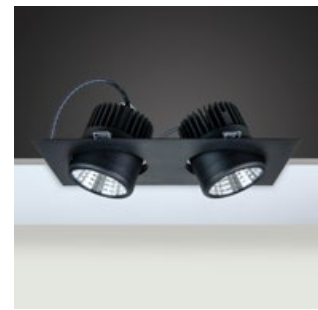

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mmx2

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:173mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

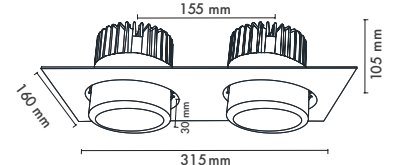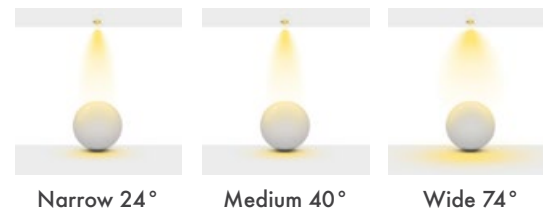

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	4400 lm	4600 lm	4800 lm	1000	40 Watt	>80
Samsung Cob Led	7000 lm	7200 lm	7400 lm	1400	60 Watt	>80
Samsung Cob Led	4000 lm	4200 lm	4400 lm	1000	40 Watt	>90
Samsung Cob Led	6000 lm	6200 lm	6400 lm	1400	60 Watt	>90



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



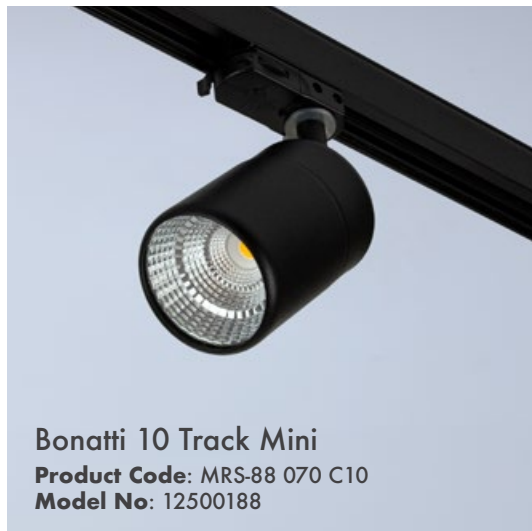

Bonatti 10 Track Mini
Product Code: MRS-88 070 C10
Model No: 12500188



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : DALI

Product Dimensions : L:98mm W:70mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Eaglerise

Beam Options : 25° / 47°


Koruma Sınıfı : IP20

Soket Tipleri : Monofaze / Trifaze / DALI


Dim Opsiyonları : DALI

Ürün Ölçüleri : U:90mm G: 70mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

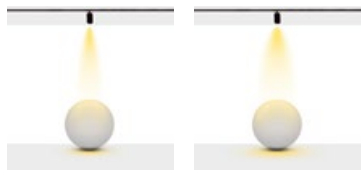

Narrow 25° / Lens
 Medium 47°

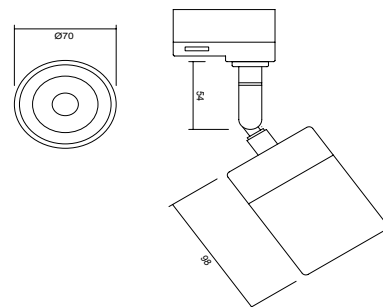

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
 Uygulama Renkleri

Textured White
 Ral 9016

Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550



Bonatti 10 Track
Product Code: MRS-34 070 C10
Model No: 12500134



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:145mm W:70mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Beam Options : 25° / 47°


Koruma Sınıfı : IP20

Soket Tipleri : Monofaze / Trifaze / DALI


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : U:145mm G: 70mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

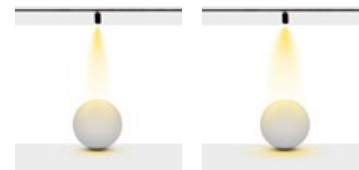

Narrow 25° / Lens
 Medium 47°

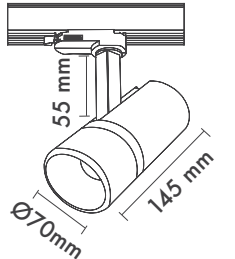

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
 Uygulama Renkleri


Textured White
 Ral 9016

Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550



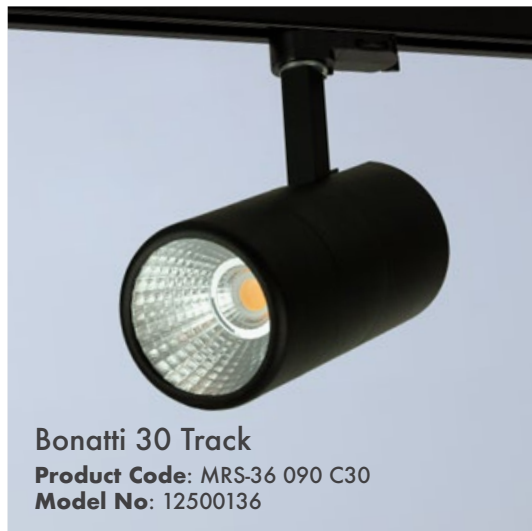

Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:150mm W: 90mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°



Koruma Sınıfı : IP20

Soket Tipleri : Monofaze / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : U:150mm G: 90mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

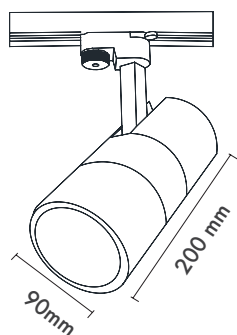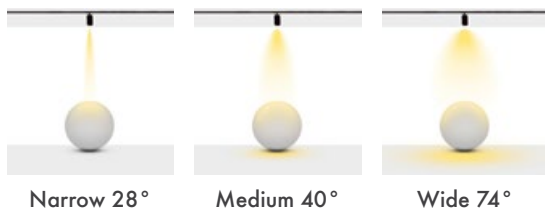

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Bonatti Track 30 IT

Product Code: MRS-89IT 090 C30
Model No: 12500189



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20

Socket Types : Triphase / DALI

Dimming Options : DALI

Product Dimensions : L:150mm W: 90mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°


Koruma Sınıfı : IP20

Soket Tipleri : Trifaze / DALI

Dim Opsiyonları : DALI

Ürün Ölçüleri : U:150mm G: 90mm


Beam Informations And Technicals / Teknik ve Açılal Bilgiler

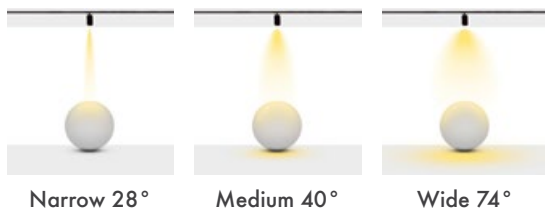

Narrow 28°

Medium 40°

Wide 74°

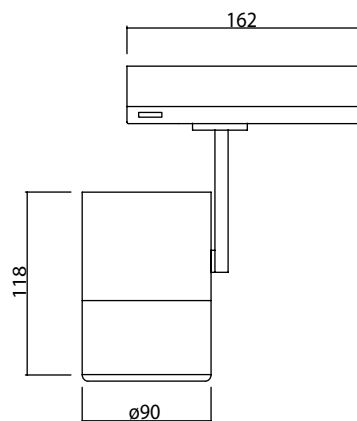

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90





Bonatti 30 Box D

Product Code: MRS-42 090 C30

Model No: 12500142



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:150mm W: 90mm

Driver Box Dimensions : L:122mm W:40mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri 28° / 40° / 74°

Koruma Sınıfı : IP20



Soket Tipleri : Monophase / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : U:150mm G: 90mm

Sürücü Kutu Ölçüleri : U:122mm G:40mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

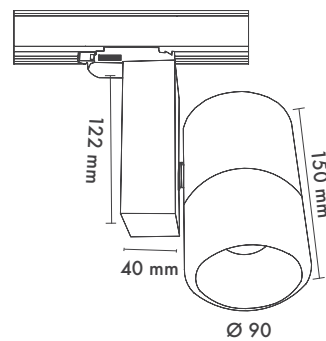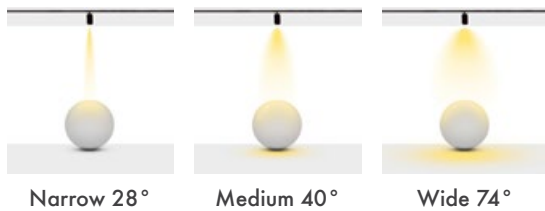Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90

	@WW 2700K Lumen	@NW 4000K Lumen	@CW 6500K Lumen	mA	Watt	CRI
CCT Tunable Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>90
CCT Tunable Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>90
CCT Tunable Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>90



Bonatti 30 Box L

Product Code: MRS-45 090 C30
Model No: 12500145



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:150mm W: 90mm

Driver Box Dimensions : L:163mm W:43mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°

Koruma Sınıfı : IP20



Soket Tipleri : Monophase / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : U:150mm G: 90mm

Sürücü Kutu Ölçüleri : U:163mm G:43mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

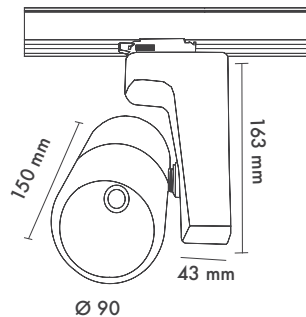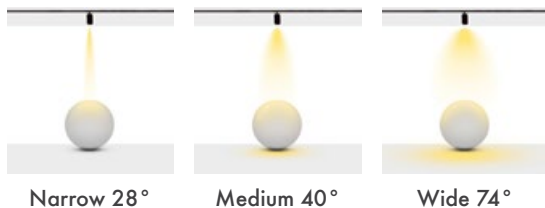

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90




LORENZO FAMILY

With its miscellaneous product types, high-quality components, well-designed products, Lorenzo products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum extrusion body and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Bonatti product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Lorenzo 30 Recessed
Recessed Spotlight

P: 246




Lorenzo 30 Surface
Surface Mounted Spotlight

P: 247



Lorenzo 30 Surface
Adjustable
Surface Mounted Spotlight

P: 248



Lorenzo Track 30 IT
Track Spotlight

P: 249



Lorenzo Track 30
Track Spotlight

P: 250




Lorenzo Track 30 D
Track Spotlight

P: 251



Lorenzo 30 Recessed

Product Code: M 400-59 ODC30
Model No: 12040059

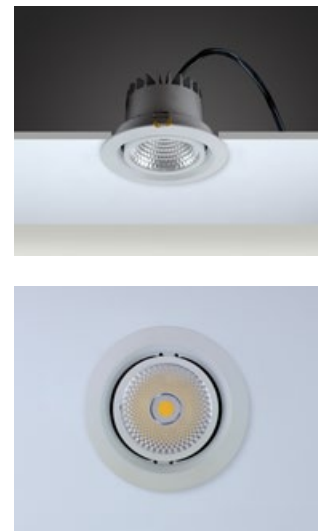

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:103mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°

Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:103mm G:147mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:150mm W:94mm

Montaj Tipi : Sıva Üstü / Sarkıt

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise


Açı Seçenekleri : 28° / 40° / 74°

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:150mm G:94mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

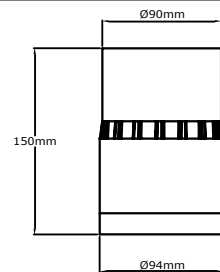

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:220mm W:94mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise



Açı Seçenekleri : 28° / 40° / 74°

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:220mm G:94mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

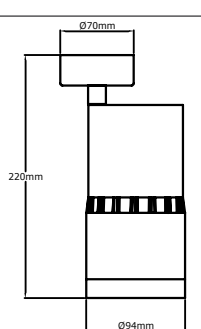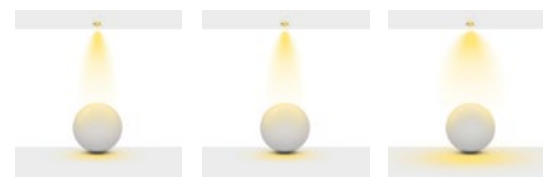

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Lorenzo Track 30 IT

Product Code: MRS-99 090 C30
Model No: 12500199



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20 / IP44

Socket Types : Monophase / Triphase / DALI

Dimming Options : DALI

Product Dimensions : H:150mm W:94mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°



Koruma Sınıfı : IP20 / IP44

Soket Tipleri : Monofaze / Trifaze / DALI

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:150mm G:94mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

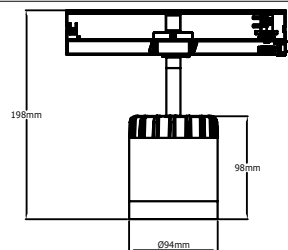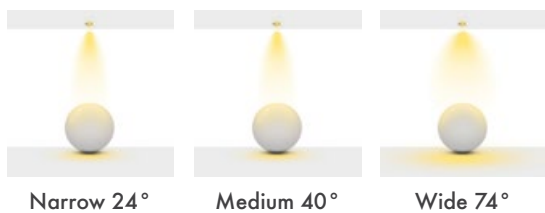

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Lorenzo Track 30

Product Code: MRS-100 090 C30
Model No: 12501100



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20 / IP44

Socket Types : Monophase / Triphase / DALI

Dimming Options : DALI

Product Dimensions : H:200mm W:94mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°



Koruma Sınıfı : IP20 / IP44

Soket Tipleri : Monofaze / Trifaze / DALI

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:200mm G:94mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

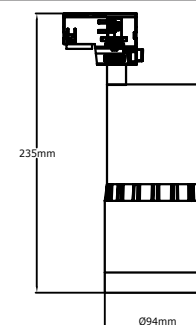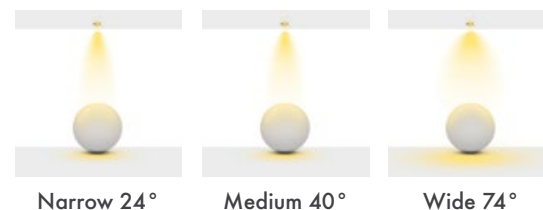

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Lorenzo Track 30 D

Product Code: MRS-101 090 C30
Model No: 12501101



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20 / IP44

Socket Types : Monophase / Triphase / DALI

Dimming Options : DALI

Product Dimensions : H:125mm W:173mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°



Koruma Sınıfı : IP20 / IP44

Soket Tipleri : Monofaze / Trifaze / DALI

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:125mm G:134mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

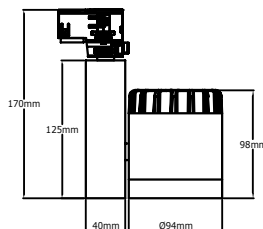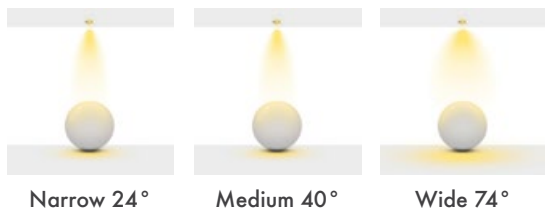

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



NORSE FAMILY

With its miscellaneous product types, high-quality components, well-designed products, Norse products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum extrusion body and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Norse product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Norse Round
Recessed Spotlight

P: 263



Norse Deep Fixed
Recessed Spotlight

P: 265



Norse Round Adjustable
Recessed Spotlight

P: 267



Norse Round Double
Adjustable
Recessed Spotlight

P: 269



Norse Round Trio
Adjustable
Recessed Spotlight

P: 271




Norse Square
Recessed Spotlight

P: 273



Norse Square Deep
Recessed Spotlight

P: 275



Norse Square Adjustable
Recessed Spotlight

P: 277



Norse Square Double
Adjustable
Recessed Spotlight

P: 279




Norse Square Trio
Adjustable
Recessed Spotlight

P: 281



Norse Surface
Surface Mounted Spotlight

P: 283



Norse Surface Adjustable
Surface Mounted Spotlight

P: 285



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:147mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

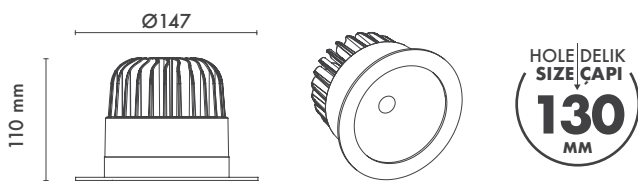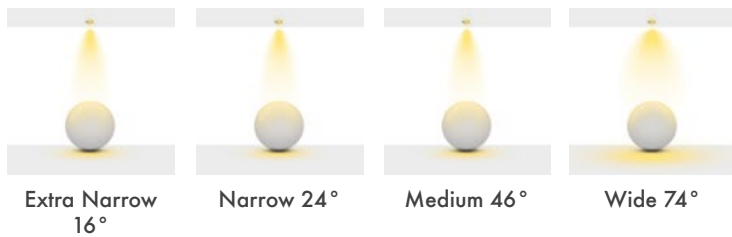

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 26° / 40° / 74°

Protection Type : IP20 / IP44

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 28° / 40° / 74°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:147mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

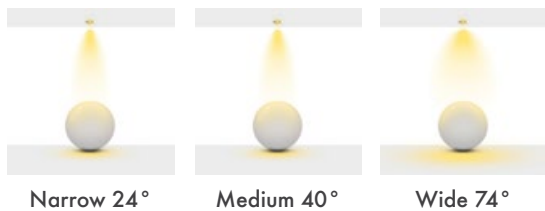

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:173mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

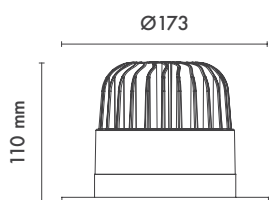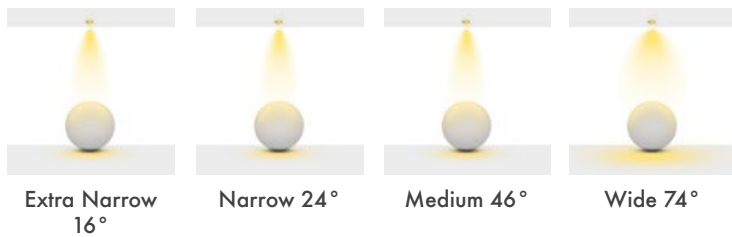

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø145mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:120mm W:160mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø145mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:120mm G:160mm

Beam Informations And Technicals / Teknik ve Açısız Bilgiler

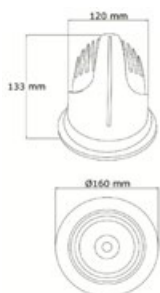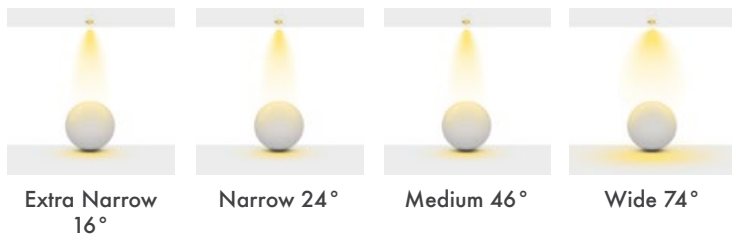

HOLE DELIK
SIZE ÇAPI
145
MM



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø158mm x 2

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:348mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø158mm x 2

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:348mm

Beam Informations And Technicals / Teknik ve Açısız Bilgiler

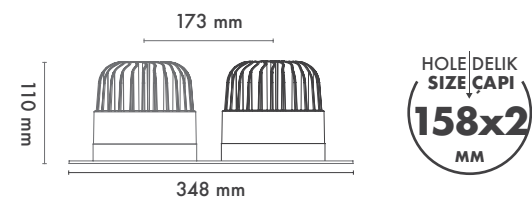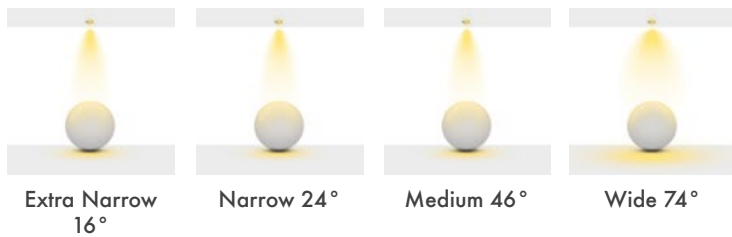

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	4400 lm	4600 lm	4800 lm	500	40 Watt	>80
Samsung Cob Led	7000 lm	7300 lm	7400 lm	700	60 Watt	>80
Samsung Cob Led	8400 lm	8800 lm	9000 lm	800	70 Watt	>80
Samsung Cob Led	9800 lm	10000 lm	12000 lm	1050	84 Watt	>80
Samsung Cob Led	4000 lm	4200 lm	4400 lm	500	40 Watt	>90
Samsung Cob Led	6000 lm	6200 lm	6400 lm	700	60 Watt	>90
Samsung Cob Led	7600 lm	7800 lm	8000 lm	800	70 Watt	>90
Samsung Cob Led	8600 lm	8800 lm	9000 lm	1050	84 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:147mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

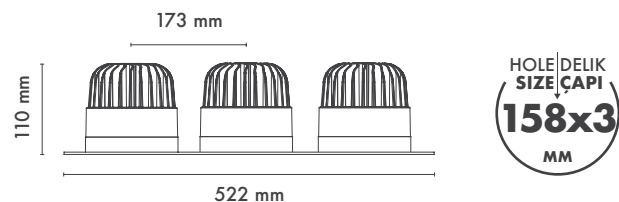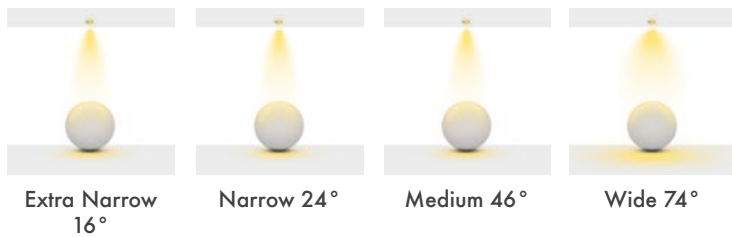

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	6600 lm	6900 lm	7200 lm	500	60 Watt	>80
Samsung Cob Led	10500 lm	10950 lm	11100 lm	700	90 Watt	>80
Samsung Cob Led	12600m	13200 lm	13500 lm	800	105 Watt	>80
Samsung Cob Led	14700 lm	15300 lm	15600 lm	1050	126 Watt	>80
Samsung Cob Led	6000 lm	6300 lm	6500 lm	500	60 Watt	>90
Samsung Cob Led	9000 lm	9300 lm	9600 lm	700	90 Watt	>90
Samsung Cob Led	11400 lm	11700 lm	12000 lm	800	105 Watt	>90
Samsung Cob Led	12900 lm	13200 lm	13500 lm	1050	126 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:147mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

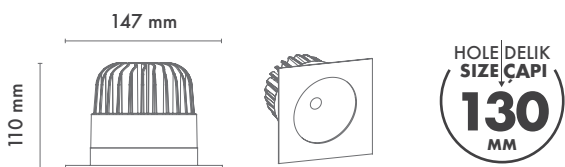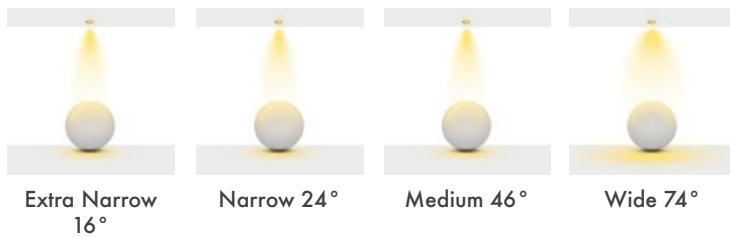

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:140mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:140mm G:173mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

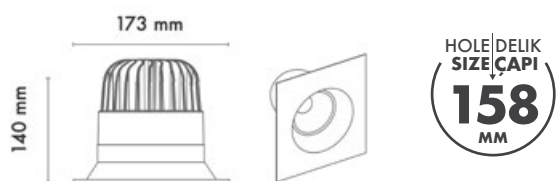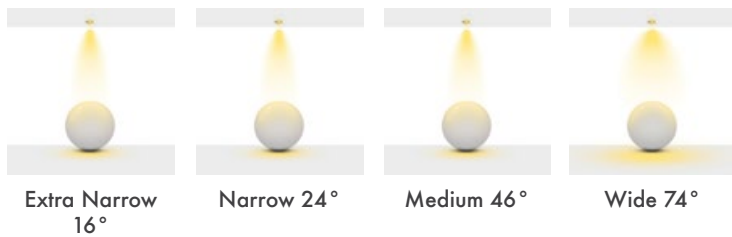

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:173mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

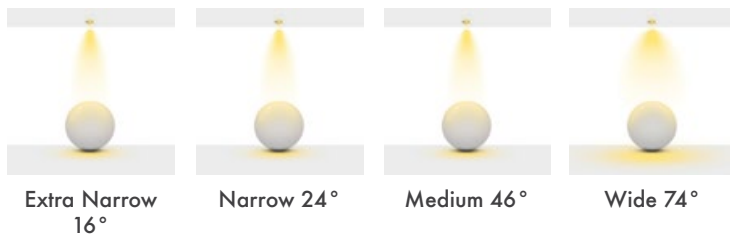

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:173mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

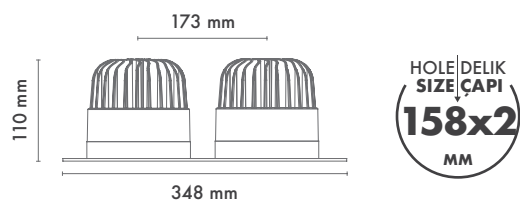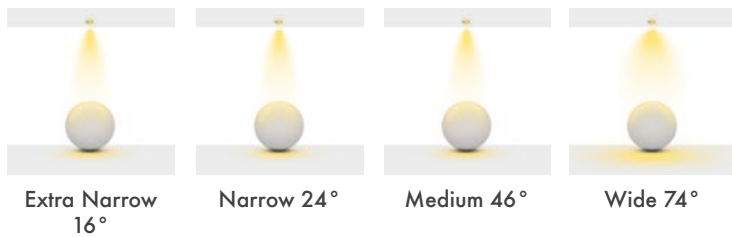

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	4400 lm	4600 lm	4800 lm	500	40 Watt	>80
Samsung Cob Led	7000 lm	7300 lm	7400 lm	700	60 Watt	>80
Samsung Cob Led	8400 lm	8800 lm	9000 lm	800	70 Watt	>80
Samsung Cob Led	9800 lm	10000 lm	12000 lm	1050	84 Watt	>80
Samsung Cob Led	4000 lm	4200 lm	4400 lm	500	40 Watt	>90
Samsung Cob Led	6000 lm	6200 lm	6400 lm	700	60 Watt	>90
Samsung Cob Led	7600 lm	7800 lm	8000 lm	800	70 Watt	>90
Samsung Cob Led	8600 lm	8800 lm	9000 lm	1050	84 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø158mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:110mm W:173mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø158mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:110mm G:173mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

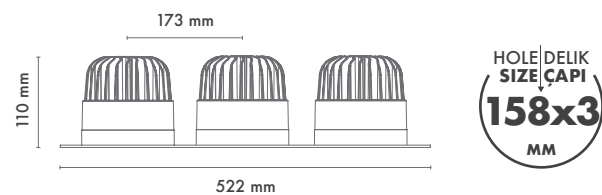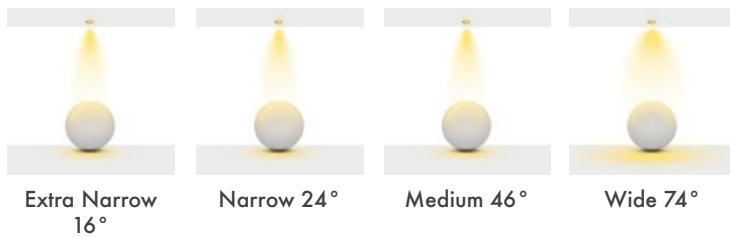

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	6600 lm	6900 lm	7200 lm	500	60 Watt	>80
Samsung Cob Led	10500 lm	10950 lm	11100 lm	700	90 Watt	>80
Samsung Cob Led	12600m	13200 lm	13500 lm	800	105 Watt	>80
Samsung Cob Led	14700 lm	15300 lm	15600 lm	1050	126 Watt	>80
Samsung Cob Led	6000 lm	6300 lm	6500 lm	500	60 Watt	>90
Samsung Cob Led	9000 lm	9300 lm	9600 lm	700	90 Watt	>90
Samsung Cob Led	11400 lm	11700 lm	12000 lm	800	105 Watt	>90
Samsung Cob Led	12900 lm	13200 lm	13500 lm	1050	126 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Extrusion Body and aluminium injection heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44 / IP65

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:150mm W:125mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise


Açı Seçenekleri : 16° / 24° / 46° / 70°

Koruma Sınıfı : IP20 / IP44 / IP65

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:150mm G:125mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

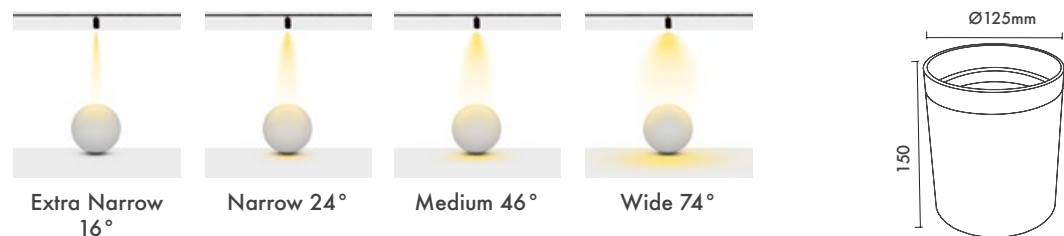

CASAMBI

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:170mm W:126mm

Montaj Tipi : Sıva Üstü / Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise


Açı Seçenekleri : 16° / 24° / 46° / 70°

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:170mm G:126mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

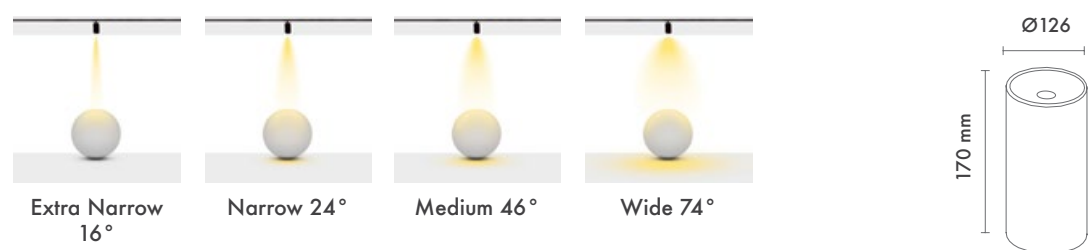

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90

DOLIS FAMILY

With its miscellaneous product types, high-quality components, well-designed products, Dolis products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum extrusion body and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Dolis product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø165

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:160mm W:190mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø165

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:160mm G:190mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

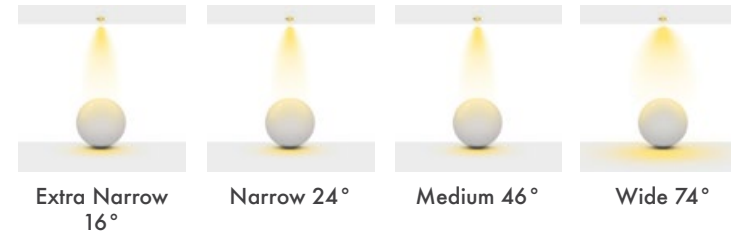

Dolis Fixed

Recessed Spotlight

P: 288



Dolis Adjustable

Recessed Spotlight


P: 290



Dolis Semi Recessed

Semi Recessed Spotlight

P: 292



Dolis-D

Track Spotlight

P: 294



Dolis-L

Track Spotlight

P: 296



Available Finishes
 Uygulama Renkleri

Textured White
 Ral 9016

Textured Grey
 Ral 9006

Textured Black
 Ral 9005

*For more page : 550
 *Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø215

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:145mm W:228mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°


Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø215


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:145mm G:228mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

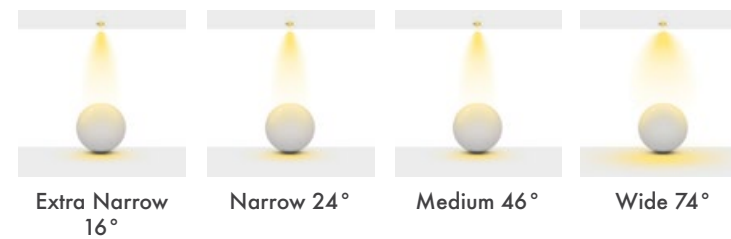

HOLE | DELIK
SIZE | ÇAPI
215
MM

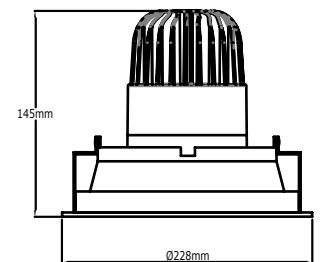

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44 / IP65

Hole Size : Ø165mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:170mm W:188mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44 / IP65

Delik Çapı : Ø165mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:170mm G:188mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

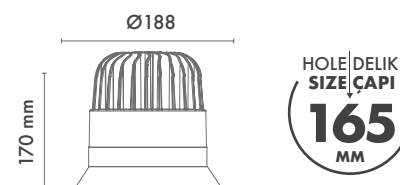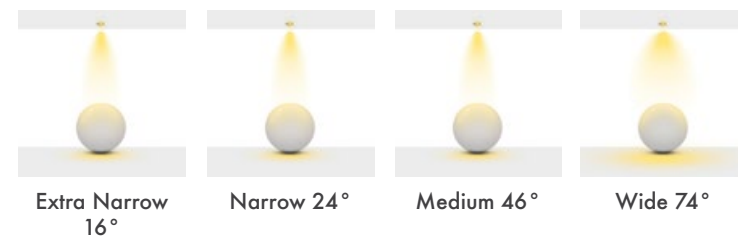

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø120mm / Ø158mm / Ø175mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:160mm W: (Varies according to optional size.)

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø120mm / Ø158mm / Ø175mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : U:160mm G: (Opsiyonel ölçüye göre değişir.)

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

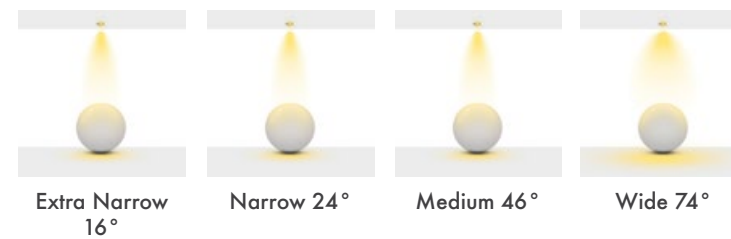

HOLE|DELİK
SIZE|ÇAPI
120
MM

HOLE|DELİK
SIZE|ÇAPI
158
MM

HOLE|DELİK
SIZE|ÇAPI
175
MM



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 74°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:102mm W: 112mm

Driver Box Dimensions : L:138mm W:40mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 74°

Koruma Sınıfı : IP20


Soket Tipleri : Monophase / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : U:102mm G: 112mm

Sürücü Kutu Ölçüleri : U:138mm G:40mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

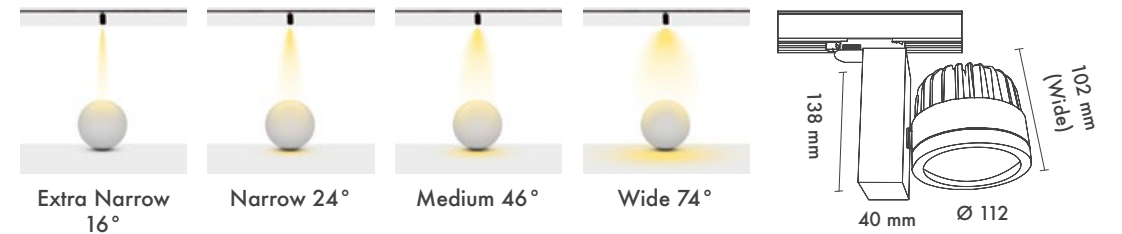

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005


*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90

Professional Lighting Technologies / Profesyonel Aydınlatma Teknolojileri

	Textile Lumen	Fruit Lumen	Bakery Lumen	Fish Lumen	Meat Lumen	mA	Watt	CRI
Professional Cob Led	1850 lm	2300 lm	1800 lm	2240 lm	1400 lm	500	20 Watt	>94
Professional Cob Led	2750 lm	3450 lm	2700 lm	3360 lm	2100 lm	700	30 Watt	>94
Professional Cob Led	3200 lm	4025 lm	3150 lm	3920 lm	2450 lm	800	35 Watt	>94
Professional Cob Led	3820 lm	4830 lm	3780 lm	4704 lm	2940 lm	1050	42 Watt	>94

	2700K @30Watt	4000K @30Watt	6500K @30Watt	mA	Watt	CRI	
Tunable White Cob Led (2700K-6500K)	2700 lm	2880 lm	3270 lm	350-1050	15-42 Watt	>90	Casambi



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 74°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:102mm W:112mm

Driver Box Dimensions : L:163mm W:43mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 74°

Koruma Sınıfı : IP20


Soket Tipleri : Monophase / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : U:102mm G:112mm

Sürücü Kutu Ölçüleri : U:163mm G:43mm

Beam Informations And Technicals / Teknik ve Açısız Bilgiler

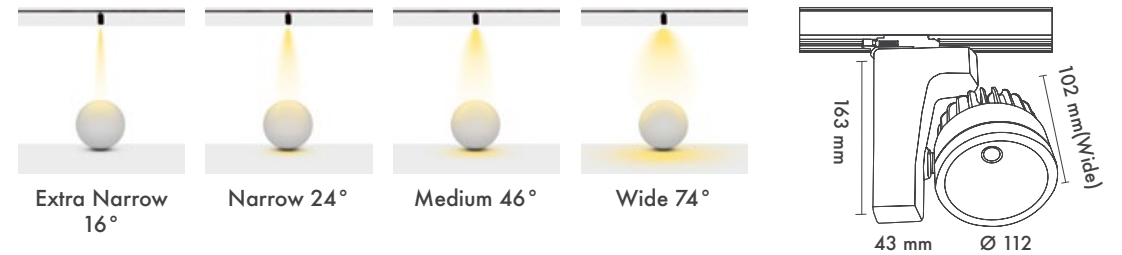

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



NEVRON FAMILY

With its square tiltable and rotatable recessed product types, high-quality components, well-designed products, Nevron products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum extrusion body and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Nevron product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Nevron Single
Recessed Spotlight

P: 299



Nevron Double
Recessed Spotlight

P: 301



Nevron Trio
Recessed Spotlight

P: 303



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø135x135mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:98mm W:150mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°




Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø135x135mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:98mm G:150mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

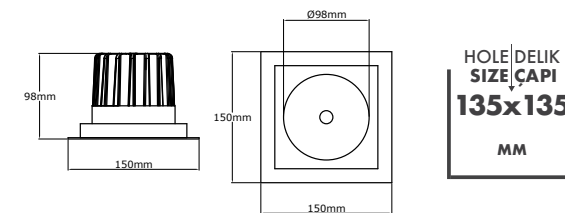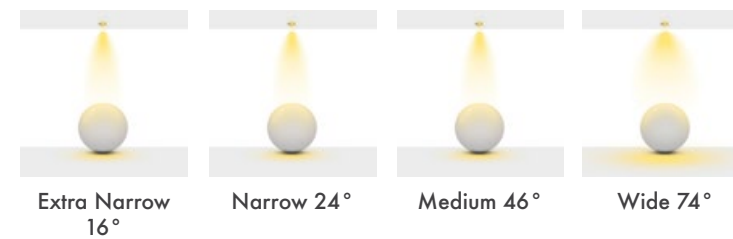

Available Finishes
Uygulama Renkleri



Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1850 lm	1875 lm	1900 lm	350	15 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	1600 lm	1650 lm	1700 lm	350	15 Watt	>90
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90

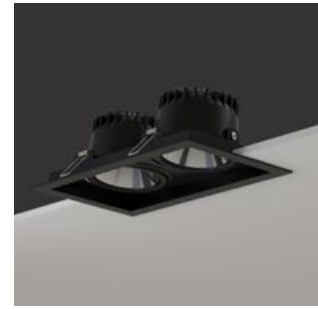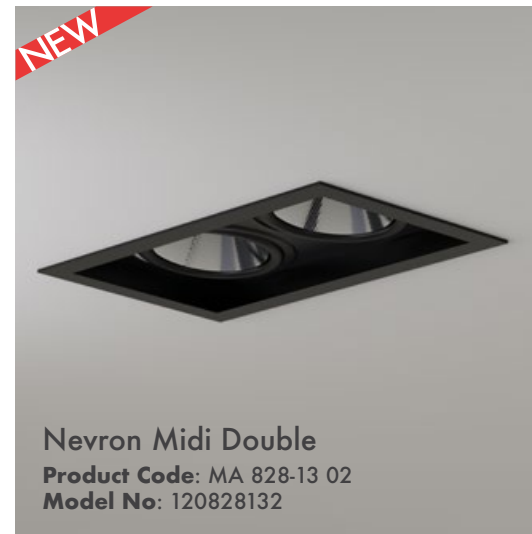

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø135x255mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:98mm W:270x150mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°




Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø135x255mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:150mm G:270x150mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

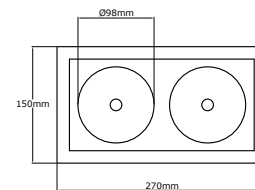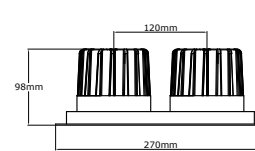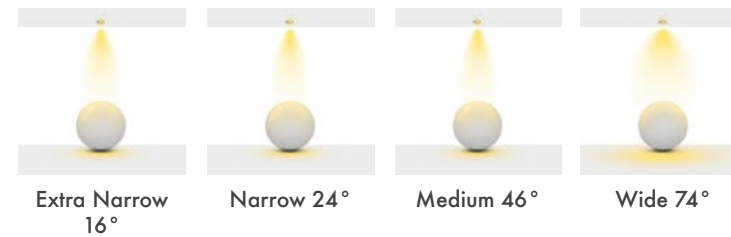

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	3700 lm	3750lm	3800 lm	350	30 Watt	>80
Samsung Cob Led	4400 lm	4600 lm	4800 lm	500	40 Watt	>80
Samsung Cob Led	3200 lm	3300 lm	3400 lm	350	30 Watt	>90
Samsung Cob Led	4000 lm	4200 lm	4400 lm	500	40 Watt	>90



Nevron Single

Product Code: MA 829-13 01
Model No: 120829131



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø165x165mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:115mm W:190mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°




Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø165x165mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:115mm G:190mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

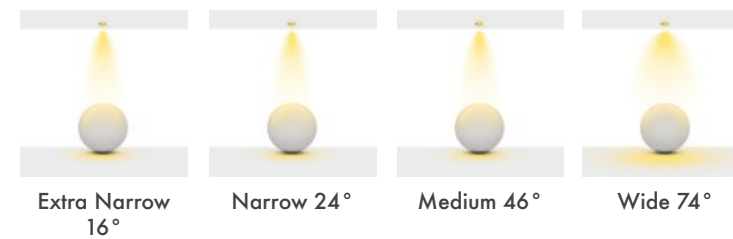

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø165x320mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:115mm W:190mm L:350mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø165x320mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:115mm G:190mm U:350mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

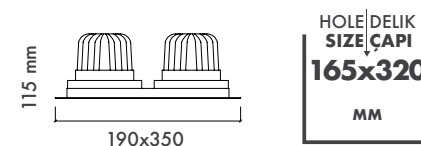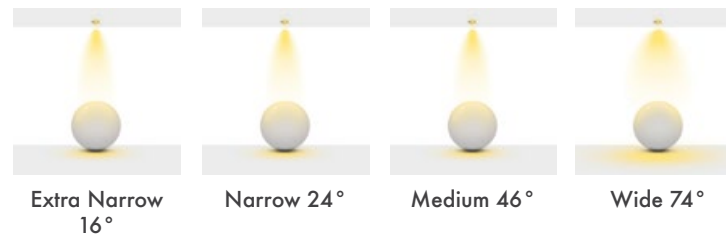

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016


Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	4400 lm	4600 lm	4800 lm	500	40 Watt	>80
Samsung Cob Led	7000 lm	7300 lm	7400 lm	700	60 Watt	>80
Samsung Cob Led	8400 lm	8800 lm	9000 lm	800	70 Watt	>80
Samsung Cob Led	9800 lm	10000 lm	12000 lm	1050	84 Watt	>80
Samsung Cob Led	4000 lm	4200 lm	4400 lm	500	40 Watt	>90
Samsung Cob Led	6000 lm	6200 lm	6400 lm	700	60 Watt	>90
Samsung Cob Led	7600 lm	7800 lm	8000 lm	800	70 Watt	>90
Samsung Cob Led	8600 lm	8800 lm	9000 lm	1050	84 Watt	>90

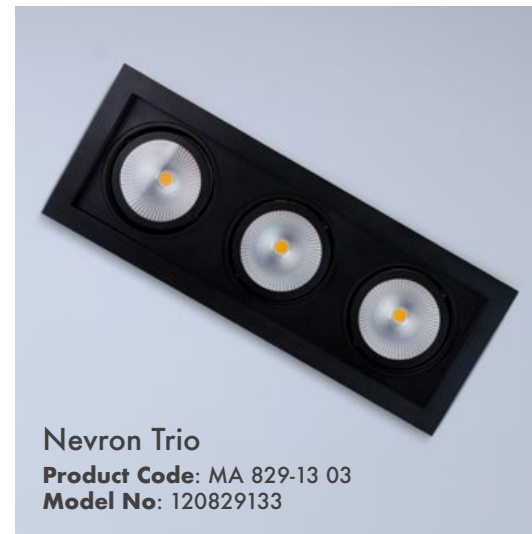

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø165x480mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:115mm W:190mm L:510mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø165x480mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:115mm G:190mm U:510mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

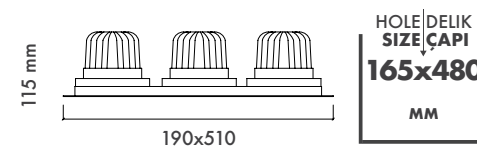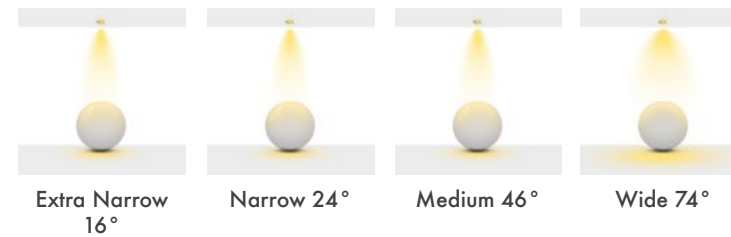

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	6600 lm	6900 lm	7200 lm	500	60 Watt	>80
Samsung Cob Led	10500 lm	10950 lm	11100 lm	700	90 Watt	>80
Samsung Cob Led	12600m	13200 lm	13500 lm	800	105 Watt	>80
Samsung Cob Led	14700 lm	15300 lm	15600 lm	1050	126 Watt	>80
Samsung Cob Led	6000 lm	6300 lm	6500 lm	500	60 Watt	>90
Samsung Cob Led	9000 lm	9300 lm	9600 lm	700	90 Watt	>90
Samsung Cob Led	11400 lm	11700 lm	12000 lm	800	105 Watt	>90
Samsung Cob Led	12900 lm	13200 lm	13500 lm	1050	126 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Trimless

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø160x160mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:124mm W:154mm

Montaj Tipi : Çerçevesiz

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø160x160mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:124mm G:154mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

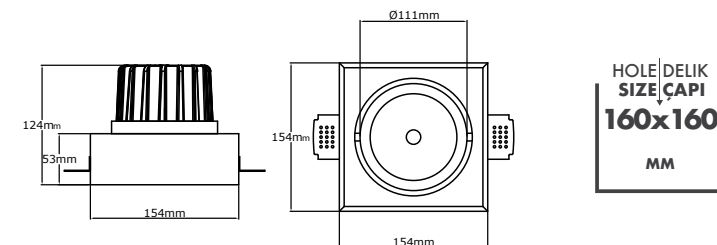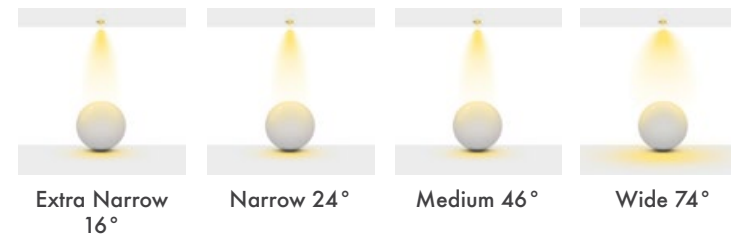

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Product Specification / Ürün Özellikleri

Installation Type : Trimless

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24° / 46° / 70°

Protection Type : IP20 / IP44

Hole Size : Ø165x320mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:115mm W:190mm L:350mm

Montaj Tipi : Çerçevesiz

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24° / 46° / 70°



Koruma Sınıfı : IP20 / IP44

Delik Çapı : Ø165x320mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:115mm G:190mm U:350mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

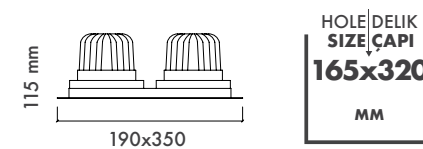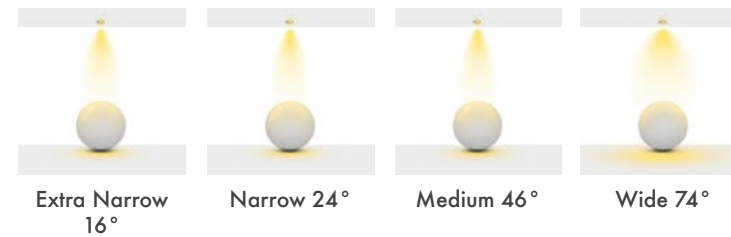

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	4400 lm	4600 lm	4800 lm	500	40 Watt	>80
Samsung Cob Led	7000 lm	7300 lm	7400 lm	700	60 Watt	>80
Samsung Cob Led	8400 lm	8800 lm	9000 lm	800	70 Watt	>80
Samsung Cob Led	9800 lm	10000 lm	12000 lm	1050	84 Watt	>80
Samsung Cob Led	4000 lm	4200 lm	4400 lm	500	40 Watt	>90
Samsung Cob Led	6000 lm	6200 lm	6400 lm	700	60 Watt	>90
Samsung Cob Led	7600 lm	7800 lm	8000 lm	800	70 Watt	>90
Samsung Cob Led	8600 lm	8800 lm	9000 lm	1050	84 Watt	>90

SHELL FAMILY



With its design like sea shells, high-quality components, well-studied heat dissipation, Shell products will offer you a joyful journey to find what you desire while decorating your space.

Best in class spot lighting with an aluminum extrusion body and aluminum-injected patented heatsink. The favored family group in the spotlight category in the all areas. The best in its category with its high efficient cob led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Shell product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Shell Midi D
Track Spotlight

P: 318



Shell Midi Y
Track Spotlight

P: 319



Shell Midi IT
Track Spotlight

P: 320



Shell Midi Spot Recessed
Recessed Spotlight

P: 321



Shell Midi Semi Recessed
Semi Recessed Spotlight

P: 322



Shell Midi D

Product Code: MRS-66D C30
Model No: 12503166

Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 36° / 60°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:252mm W: 140mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 36° / 60°


Koruma Sınıfı : IP20

Soket Tipleri : Monofaze / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : L:252mm W: 140mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

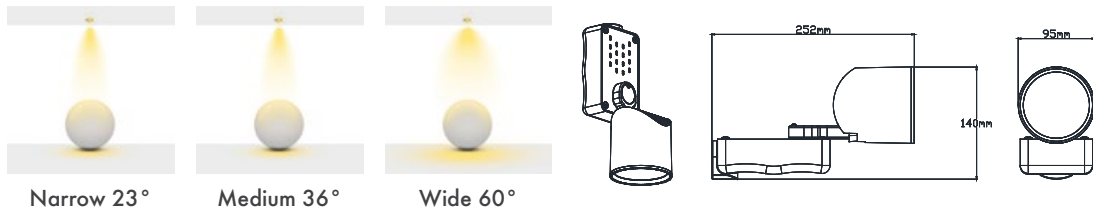

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Shell Midi Y

Product Code: MRS-66Y C30
Model No: 12502166

Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 36° / 60°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:236mm W: 159mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 36° / 60°


Koruma Sınıfı : IP20

Soket Tipleri : Monofaze / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : L:236mm W: 159mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

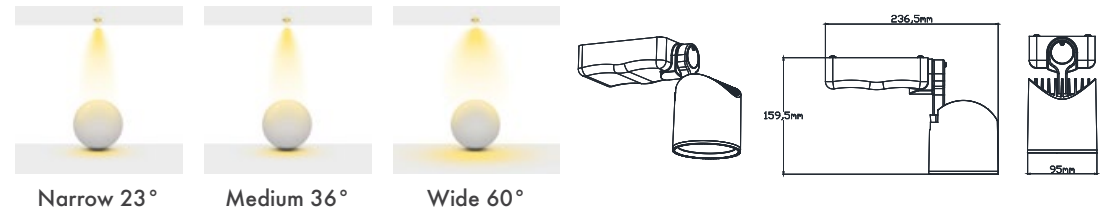

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 36° / 60°

Protection Type : IP20

Socket Types : Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:125mm W: 95mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 36° / 60°



Koruma Sınıfı : IP20

Soket Tipleri : Trifaze / DALI

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:125mm W: 95mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

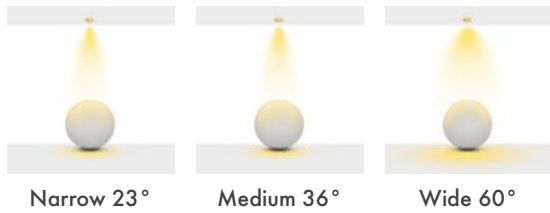

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 36° / 60°

Protection Type : IP20

Hole Size : Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:116 mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 36° / 60°



Koruma Sınıfı : IP20

Delik Çapı : Ø130mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:116mm W: 147mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

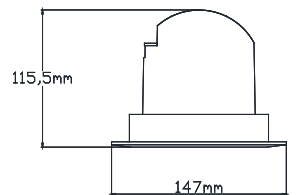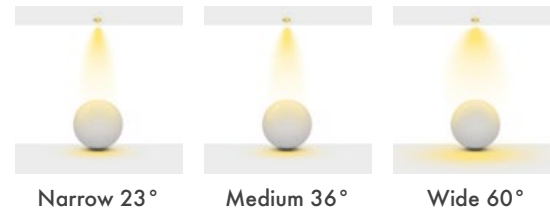

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 23° / 36° / 60°

Protection Type : IP20

Hole Size : Ø85mm / Ø105mm / Ø130mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:116 mm W:147mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 23° / 36° / 60°


Koruma Sınıfı : IP20

Delik Çapı : Ø85mm / Ø105mm / Ø130mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:116mm W: 147mm

Beam Informations And Technicals / Teknik ve Açısız Bilgiler

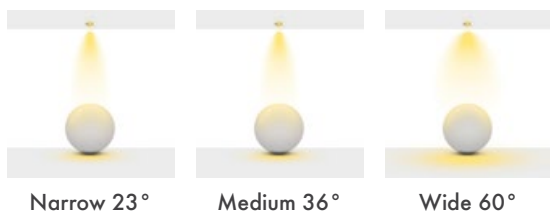

HOLE/DELİK
SIZE/ÇAPI
85 - 105
130
MM



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



SPECTRAL FAMILY

With its low height, curved design, high-quality components, screwless outlook, Spectral products will offer you a joyful journey to find what you desire while decorating your space.

Best in class surface mounted general lighting with an aluminum extrusion body. The favored family group in the surface mounted general lighting category in the all areas. The best in its category with its high efficient power led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Spectral product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Spectral 100

Surface Mounted Downlight

P: 375



Spectral 126

Surface Mounted Downlight

P: 376



Spectral 150

Surface Mounted Downlight

P: 377



Spectral 200

Surface Mounted Downlight

P: 377



Spectral 200 Rad-Em

Surface Mounted Downlight

P: 375



Spectral 350

Surface Mounted Downlight

P: 376



Spectral 500

Surface Mounted Downlight

P: 377



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:100mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:100mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:126mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram



Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:126mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:150mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram



Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:150mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Injection and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:200mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram



Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:200mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

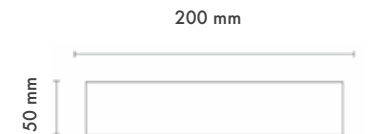

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



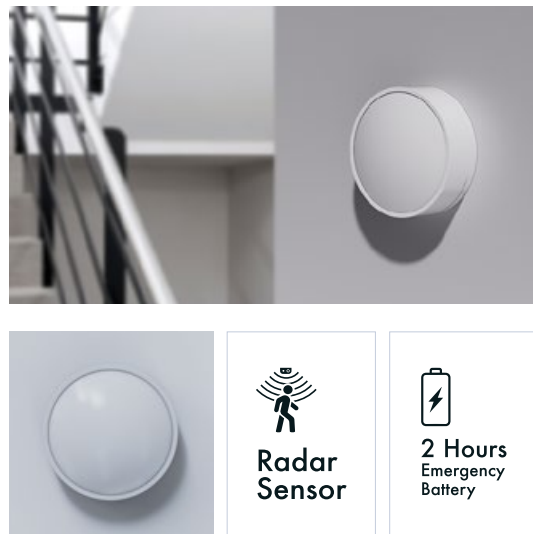

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Body Color : Electrostatic Powder Coating

Diffuser : Opal Polycarbonate

Led System : Osram Integrated

Protection Type : IP44 / IP54

Sensor Type : Microwave (Radar)

Detection Area : 180° - 5.7 meter

Emergency Duration : 2 Hours

Product Dimensions : H:65mm W:200mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Difüzör : Opal Polikarbon

Led Sistemi : Osram Dahili

Koruma Sınıfı : IP44 / IP54

Sensör Tipi : Radar

Algı Alanı : 180° - 5.7 metre

Acil Kit Süresi : 2 Saat

Ürün Ölçüleri : Y:65mm G:200mm

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	2200 lm	2300 lm	2450 lm	20 Watt	>85

In Emergency Activate	3000K Lumen	4000K Lumen	6500K Lumen	Performance
Osram	330 lm	345 lm	370 lm	%15



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016



Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Beam Informations And Technicals / Teknik ve Açılal Bilgiler

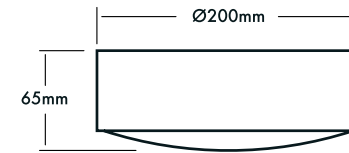

Warning Flash
Uyarı Flaşörü


- If battery is empty, red flash will appear for 2 hours till get charged.
- If battery fully charged, red flash will light always.
- Eğer pil boş ise, şarj olana kadar 2 saat boyunca kırmızı flaş yanacaktır.
- Eğer pil tam şarjlı ise kırmızı flaş sürekli yanacaktır.

Beam Informations/ Açılal Bilgiler


Wide 120°



Wide 120°

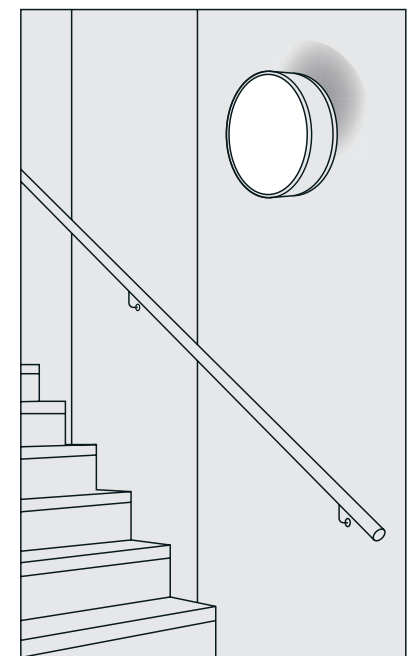

Detection Meters

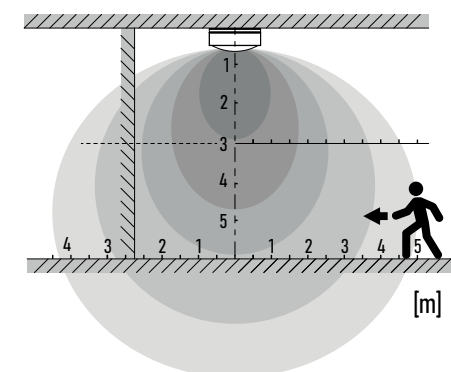

[m]



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:350mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : AlüminyumGövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:350mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Wide 100°



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	3147 lm	3290 lm	3519 lm	350	28 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:500mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : AlüminyumGövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:500mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Wide 100°



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	4500 lm	4700 lm	5030 lm	350	40 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 24° / 70°

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:160mm W: 100mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise



Açı Seçenekleri : 24° / 70°

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:160mm G:100mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

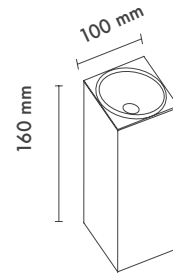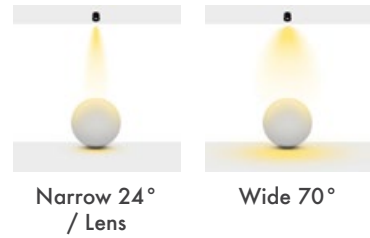

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 18° / 70°

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:100mm W:100mm L:200mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise



Açı Seçenekleri : 18° / 70°

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:100mm G:100mm U:200mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

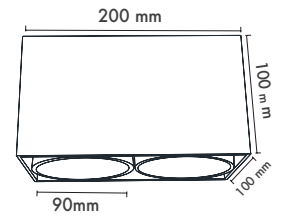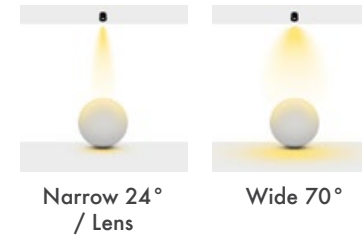

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1420 lm	1540 lm	1660 lm	180	14 Watt	>80
Samsung Cob Led	2020 lm	2140 lm	2260 lm	250	20 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Coffee Lens Track

Product Code: MRS-77L C10
Model No: 12510177



Product Specification / Ürün Özellikleri

Installation Type : Track mounted

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led Brands : Samsung

Driver Brands : Tridonic / Philips / Osram / Eaglerise

Beam Options : 15° / 36°

Protection Type : IP20

Socket Types : Monophase / Triphase

Dimming Options : Not Available

Product Dimensions : L:123mm W 60mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Lens: PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led Markaları : Samsung

Sürücü Markaları : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 15° / 36°


Koruma Sınıfı : IP20

Soket Tipleri : Monofaze / Trifaze

Dim Opsiyonları : Uygun Değil


Ürün Ölçüleri : U:123mm G: 60mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

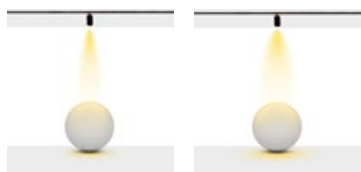

Narrow 15°

Medium 36°

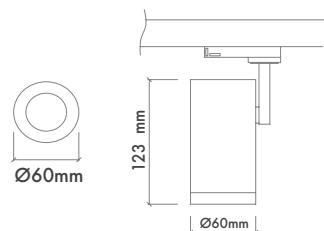

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Narrowo 30 Track

Product Code: MRS-78 090 C30
Model No: 12500178



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 10°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:215mm W: 90mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 10°



Koruma Sınıfı : IP20

Soket Tipleri : Monofaze / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : U:215mm G: 90mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

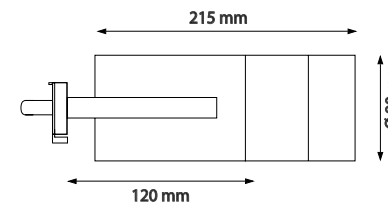Extra Narrow
10°

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Injection Body and Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 16° / 24°

Protection Type : IP20

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:145mm W: 100mm

Driver Box Dimensions : L:163mm W:43mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Cam Çeşitleri : Temperli (Standart) / Buzlu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 16° / 24°

Koruma Sınıfı : IP20



Soket Tipleri : Monophase / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : U:145mm G: 100mm

Sürücü Kutu Ölçüleri : U:163mm G:43mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

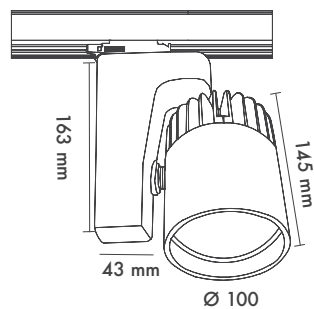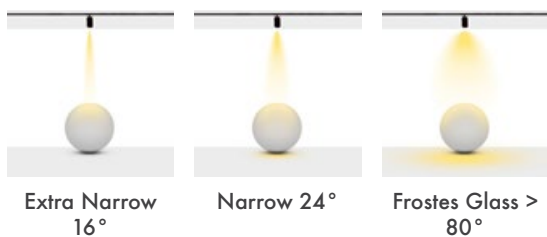

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	4300 lm	4400 lm	4500 lm	800	35 Watt	>80
Samsung Cob Led	4900 lm	5000 lm	5100 lm	1050	42 Watt	>80
Samsung Cob Led	2000 lm	2100 lm	2200 lm	500	20 Watt	>90
Samsung Cob Led	3000 lm	3100 lm	3200 lm	700	30 Watt	>90
Samsung Cob Led	3800 lm	3900 lm	4000 lm	800	35 Watt	>90
Samsung Cob Led	4300 lm	4400 lm	4500 lm	1050	42 Watt	>90



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Nergis 30

Product Code: MRS-64 C30
Model No: 12500164



Available with manuel
astrodim 1-10V option.
Manuel 1-10V astrodim
seçeneğiyle mevcuttur.



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°

Protection Type : IP20


Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI / Astrodim

Product Dimensions : L:110mm W: 90mm

Driver Box Dimensions : L:125mm W:40mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

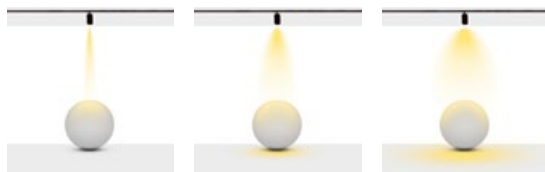

Narrow 28° Medium 40° Wide 74°

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Nergis 30 IT

Product Code: MRS-64IT C30
Model No: 12500264



Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection Heatsink

Glass Options : Tempered (Standard) / Frosted

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 28° / 40° / 74°


Protection Type : IP20

Socket Types : Triphase / DALI


Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : L:110mm W: 90mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

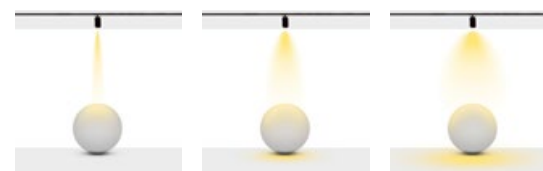

Narrow 28° Medium 40° Wide 74°

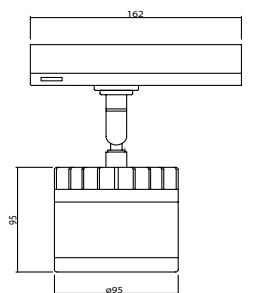

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Monophase Track

Product Code: MTR-001 XXXX
Model No: 19800001

Orientation Type :
Surface Mounted - Suspendant

Body :
Aluminium Extrusion Body

Body Color :
Electrostatic Powder Coating

Kullanım Tipi :
Sıva Üstü - Sarkıt

Gövde :
Alüminyum Ekstrüzyon

Gövde Rengi :
Elektrostatik Toz Boya



Monophase T Connector

Product Code: MTR-005
Model No: 19800005

Track Type : Monophase
Ray Tipi : Monofaze

Available Finishes
Uygulama Renkleri White Black




Monophase Straight Connector

Product Code: MTR-002
Model No: 19800002

Track Type : Monophase
Ray Tipi : Monofaze

Available Finishes
Uygulama Renkleri White Black

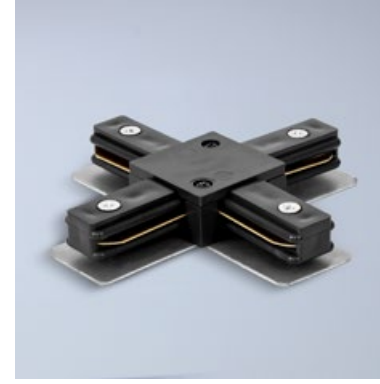

Monophase X Connector

Product Code: MTR-006
Model No: 19800006

Track Type : Monophase
Ray Tipi : Monofaze

Available Finishes
Uygulama Renkleri White Black



Monophase Energy Socket

Product Code: MTR-003
Model No: 19800003

Track Type : Monophase
Ray Tipi : Monofaze

Available Finishes
Uygulama Renkleri White Black



Monophase Adjustable Connector

Product Code: MTR-018
Model No: 19800018

Track Type : Monophase
Ray Tipi : Monofaze

Available Finishes
Uygulama Renkleri White Black



Monophase L Connector (90°)

Product Code: MTR-004
Model No: 19800004

Track Type : Monophase
Ray Tipi : Monofaze

Available Finishes
Uygulama Renkleri White Black




Monophase End Cap

Product Code: MTR-019
Model No: 19800019

Track Type : Monophase
Ray Tipi : Monofaze

Available Finishes
Uygulama Renkleri White Black

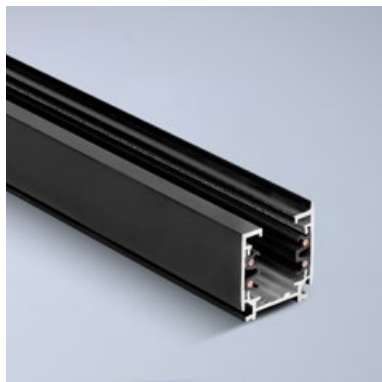

Triphase Track

Product Code: MTR-007 XXXX
Model No: 19800007

Orientation Type :
Surface Mounted - Suspendant

Body :
Aluminium Extrusion Body

Body Color :
Electrostatic Powder Coating

Kullanım Tipi :
Sıva Üstü - Sarkıt

Gövde :
Alüminyum Ekstrüzyon

Gövde Rengi :
Elektrostatik Toz Boya



Triphase Adjustable Connector

Product Code: MTR-015
Model No: 19800015

Track Type : Triphase
Ray Tipi : Trifaze

Available Finishes
Uygulama Renkleri White Black



Triphase Energy Socket

Product Code: MTR-011
Model No: 19800011

Track Type : Triphase
Ray Tipi : Trifaze

Available Finishes
Uygulama Renkleri White Black



Triphase T Connector

Product Code: MTR-031
Model No: 19800031

Track Type : Triphase
Ray Tipi : Trifaze

Available Finishes
Uygulama Renkleri White Black



Triphase Long Type Connector

Product Code: MTR-009
Model No: 19800009

Track Type : Triphase
Ray Tipi : Trifaze

Available Finishes
Uygulama Renkleri White Black



Triphase L Connector (90°)

Product Code: MTR-014
Model No: 19800014

Track Type : Triphase
Ray Tipi : Trifaze

Available Finishes
Uygulama Renkleri White Black



Dali Track

Product Code: MTR-023 XXXX
Model No: 19800023

Orientation Type :
Surface Mounted - Suspendant

Body :
Aluminium Extrusion Body

Body Color :
Electrostatic Powder Coating

Kullanım Tipi :
Sıva Üstü - Sarkıt

Gövde :
Alüminyum Ekstrüzyon

Gövde Rengi :
Elektrostatik Toz Boya



Dali Adjustable Connector

Product Code: MTR-028
Model No: 19800028

Track Type : Dali
Ray Tipi : Dali

Available Finishes
Uygulama Renkleri White Black



Dali Energy Socket

Product Code: MTR-011
Model No: 19800011

Track Type : Dali
Ray Tipi : Dali

Available Finishes
Uygulama Renkleri White Black



Dali T Connector

Product Code: MTR-040
Model No: 19800040

Track Type : Dali
Ray Tipi : Dali

Available Finishes
Uygulama Renkleri White Black



Dali Long Type Connector

Product Code: MTR-025
Model No: 19800025

Track Type : Dali
Ray Tipi : Dali

Available Finishes
Uygulama Renkleri White Black



Dali X Connector

Product Code: MTR-041
Model No: 19800041

Track Type : Dali
Ray Tipi : Dali

Available Finishes
Uygulama Renkleri White Black



Dali L Connector (90°)

Product Code: MTR-029
Model No: 19800029

Track Type : Dali
Ray Tipi : Dali

Available Finishes
Uygulama Renkleri White Black



Dali Adjustable Connector

Product Code: MTR-028
Model No: 19800028

Track Type : Dali
Ray Tipi : Dali

Available Finishes
Uygulama Renkleri White Black

LEHMAN FAMILY



Lehman 38 Surface

Suspended Linear
Light


P: 395



Lehman 38 Track

Track Mounted Linear
Light

P: 397



Lehman 56 Recessed

Recessed Linear
Light

P: 399



Lehman 56 Trimless

Trimless Linear
Light

P: 401



Lehman 56 Surface

Surface Mounted Linear
Light

P: 395



Lehman 56 Wall

Wall Linear
Light

P: 397



Lehman 56 Track

Track Mounted Linear
Light

P: 399



Lehman 56 Deep Surface

Surface Mounted Linear
Light

P: 401



Lehman 86 Recessed

Recessed Linear
Light

P: 403



Lehman 86 Surface

Surface Mounted Linear
Light

P: 405

Lehman 56 Square /
Rectangle /
Square / Rectangle Linear
Light

P: 406



Lehman Hex 40

Decorative Lighting

P: 407



Lehman Hex 50

Decorative Lighting

P: 408



Lehman Hex 60

Decorative Lighting

P: 409



Lehman Hex 70

Decorative Lighting

P: 410



Lehman Hex 80

Decorative Lighting


P: 410

With its different sizes, high-quality components, well-designed structure, Lehman products will offer you a joyful journey to find what you desire while decorating your space. Lehman offers you 4 installation variants.

Surface Mounted
Suspended
Recessed
Trimless

Best in class linear lighting with an aluminum extrusion body and aluminium injected end caps. No light leak from the end caps. The favored family group in the linear light category in the all areas. The best in its category with its high efficient smd led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Lehman product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/ support for installation manuals of the products.

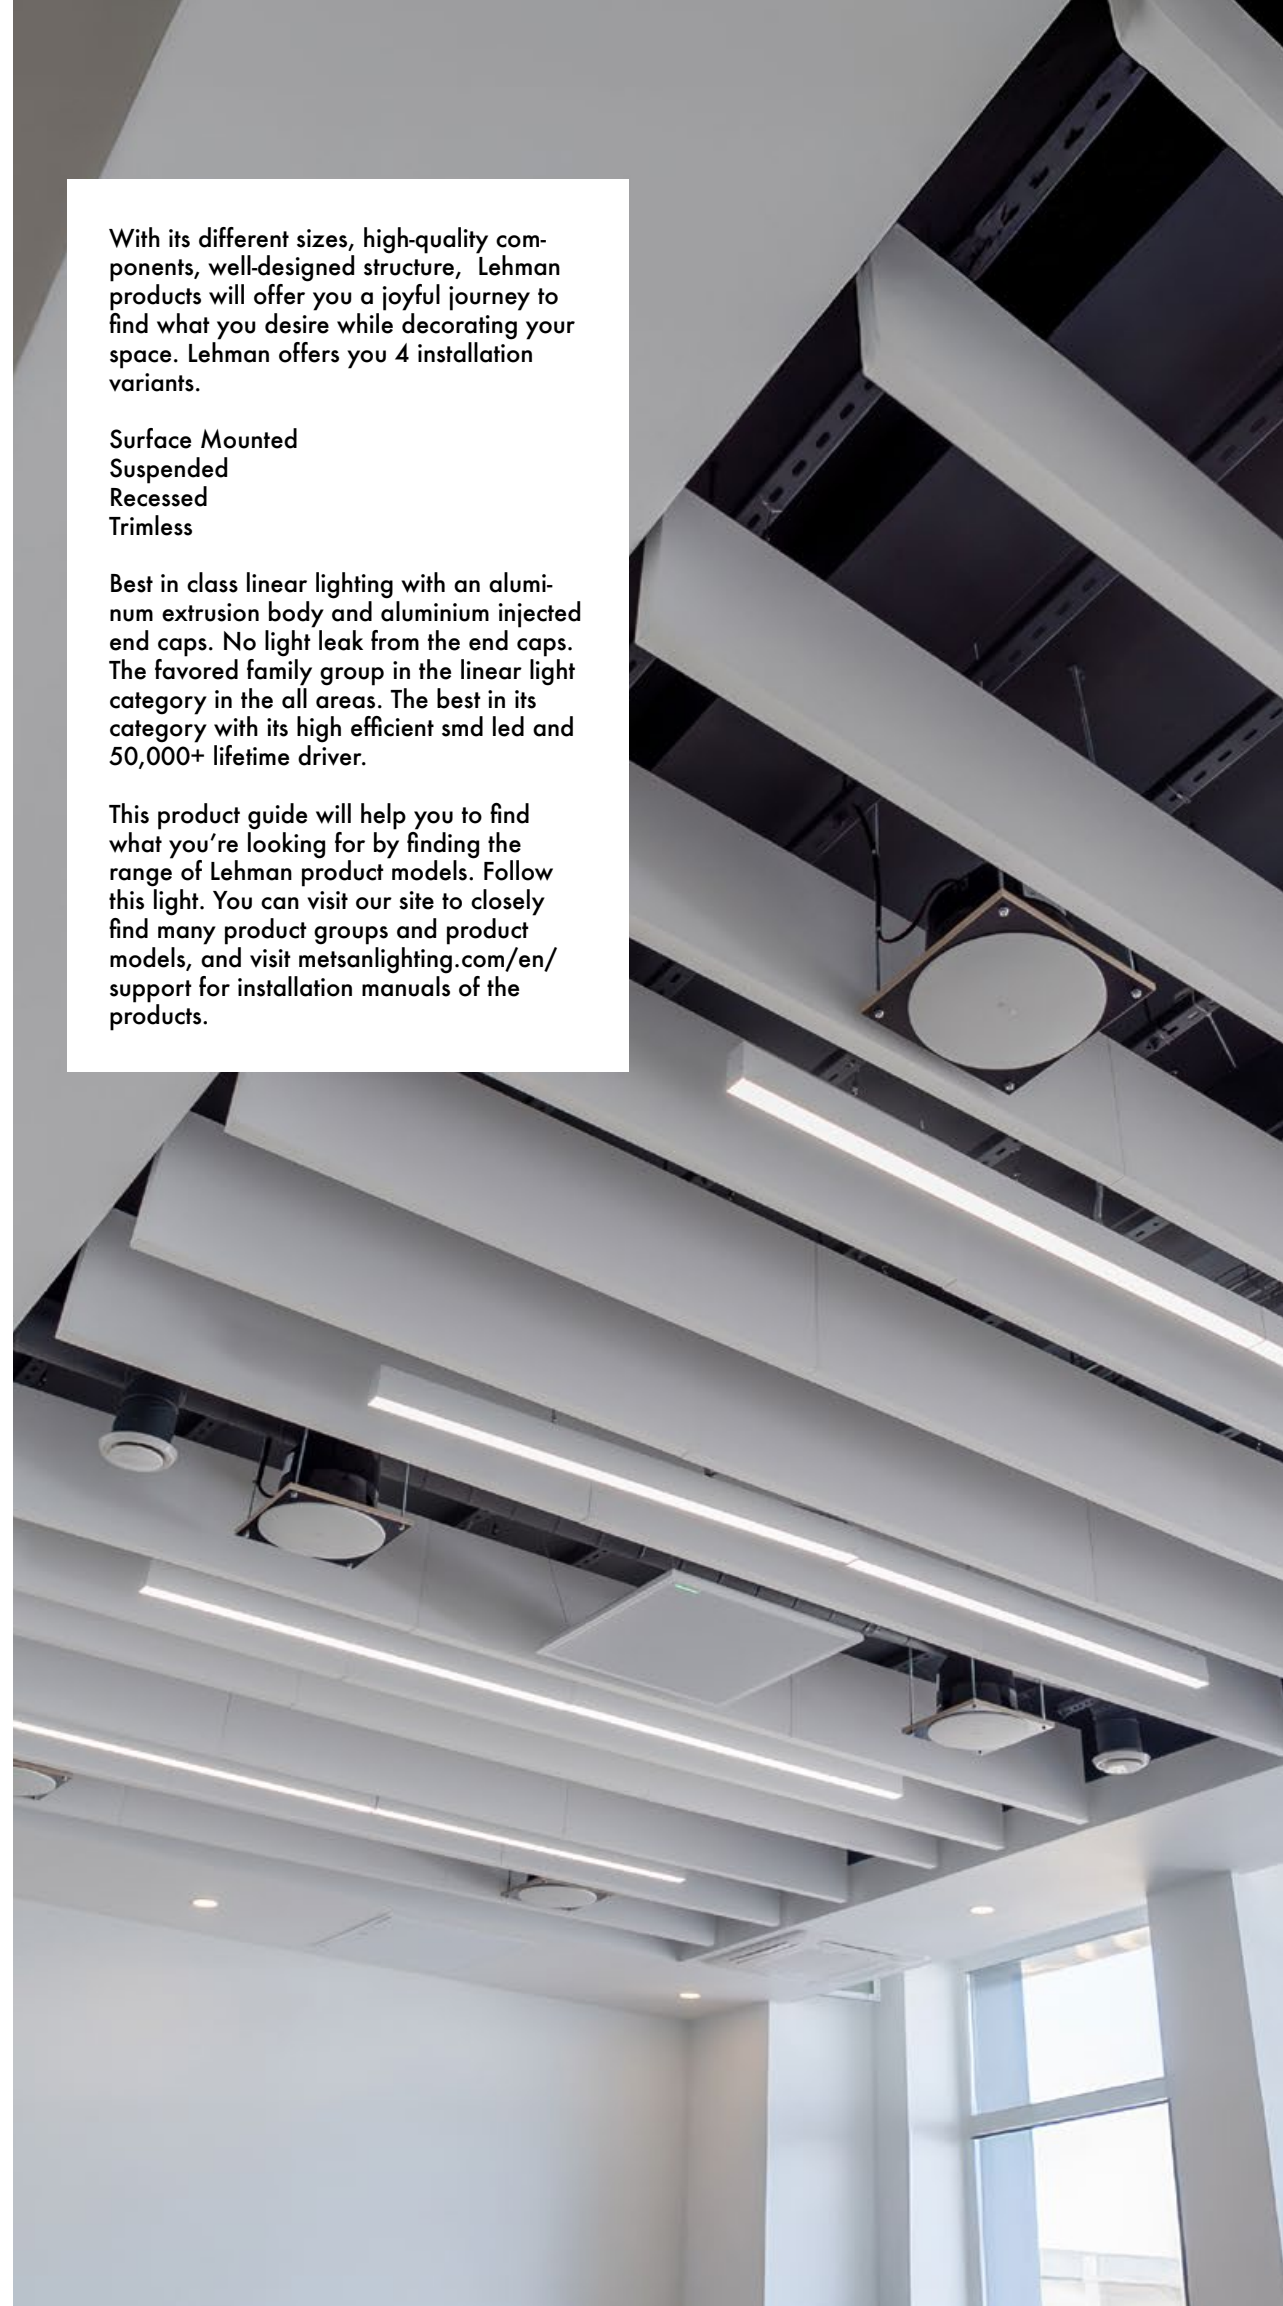



Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:36mm W:42mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:36mm G:42mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



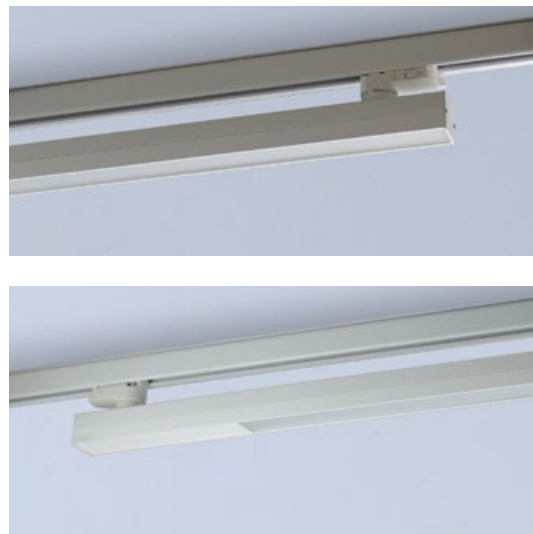

Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:36mm W:42mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:36mm G:42mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Width : 65mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:84mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Genişliği : 65mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:84mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

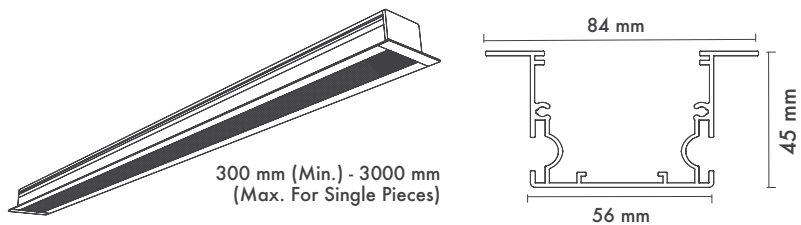

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016


Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82

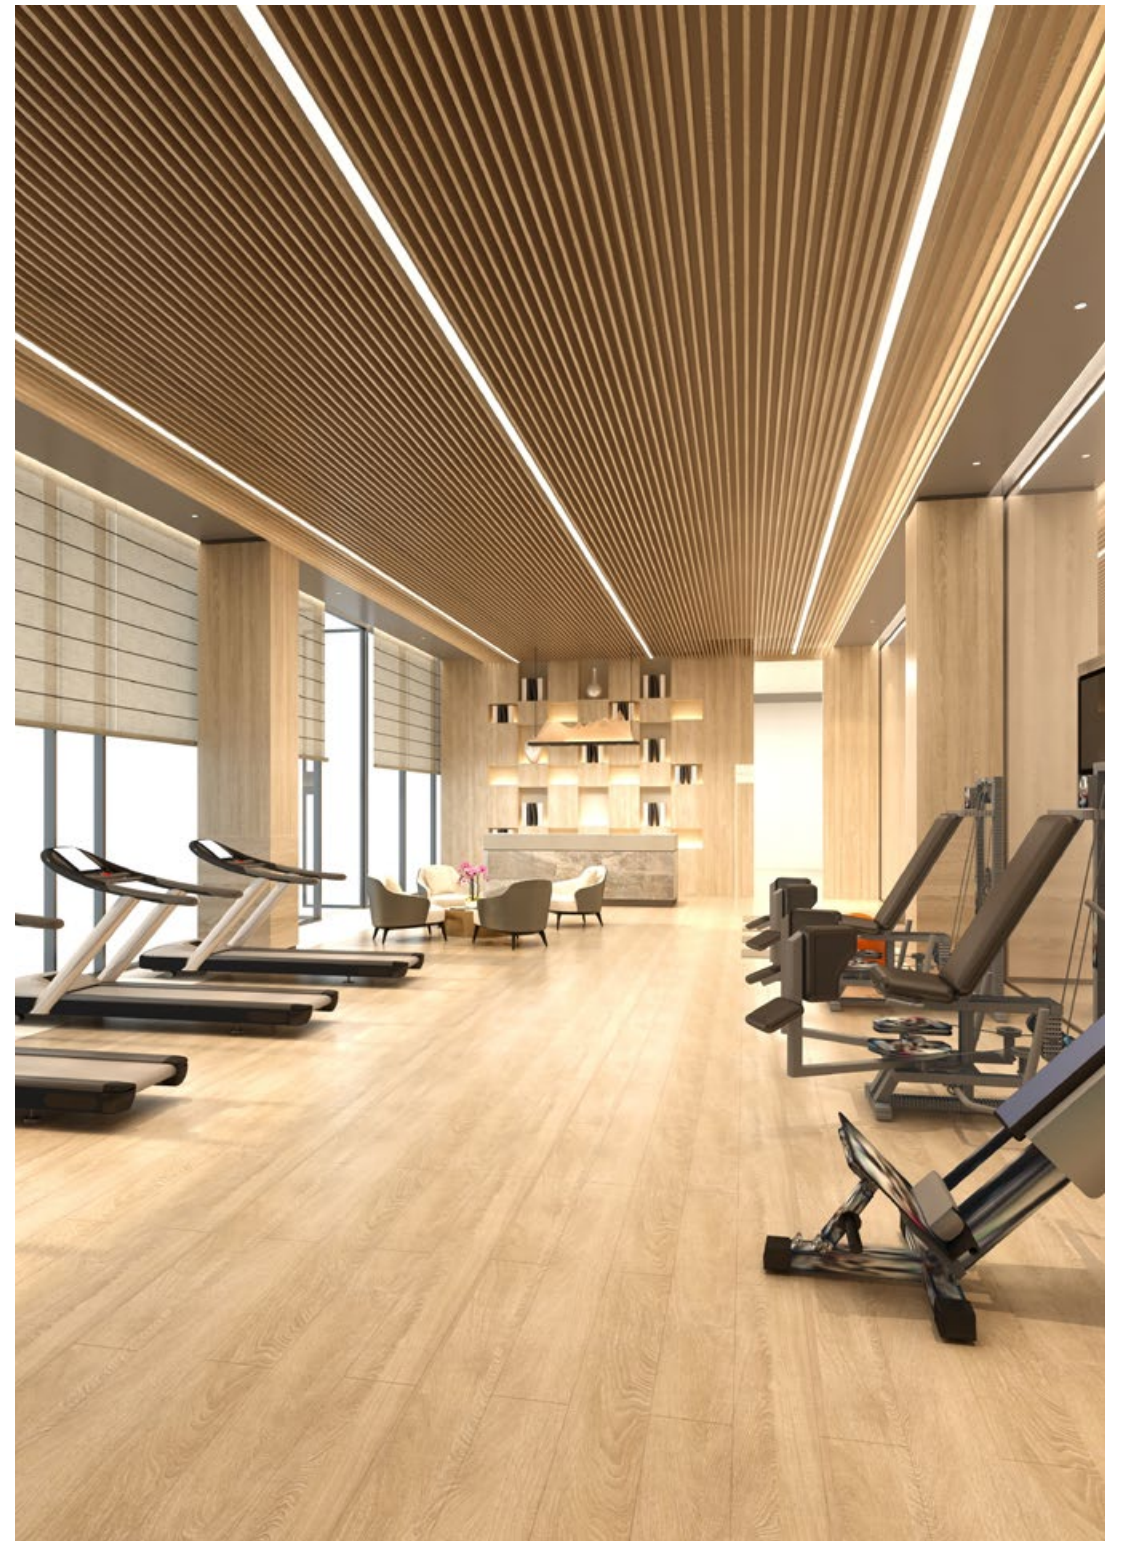



Product Specification / Ürün Özellikleri

Installation Type : Trimless

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Width : 65mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:81mm

Montaj Tipi : Çerçevesiz

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44


Delik Genişliği : 65mm

Dim Opsiyonları : Triak / 1-10 V / DALI


Ürün Ölçüleri : Y:81mm G:81mm

	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



110°

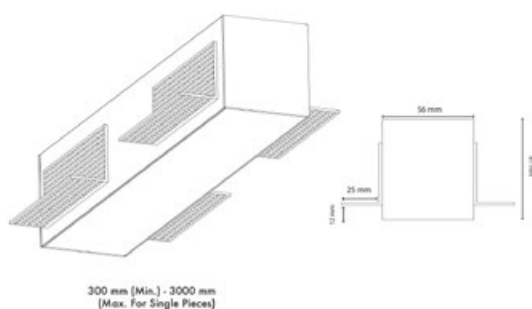

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:56mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:81mm G:56mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açıl Bilgiler

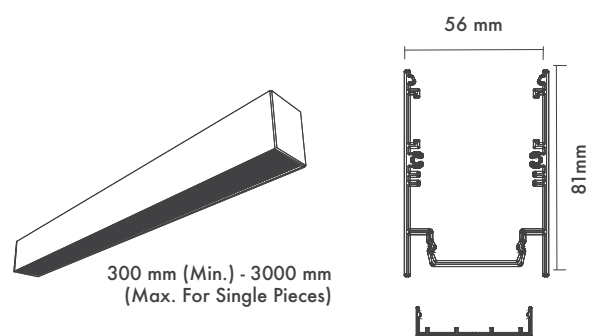

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82





End Caps
Sonlandırma Kapakları

Wall Fixing Part
Duvara Sabitleme Parçası

Product Specification / Ürün Özellikleri

Installation Type : Wall Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:56mm

Montaj Tipi : Duvara Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:81mm G:56mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



110°

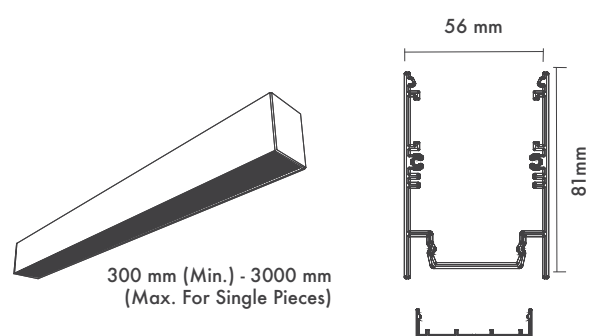

	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



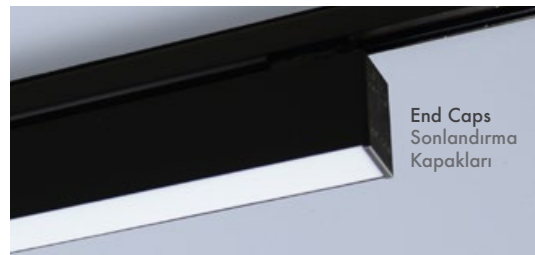

Product Specification / Ürün Özellikleri

Installation Type : Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Socket Types : Monophase / Triphase / DALI

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:56mm

Montaj Tipi : Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44



Soket Tipleri : Monofaze / Trifaze / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:81mm G:56mm

	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

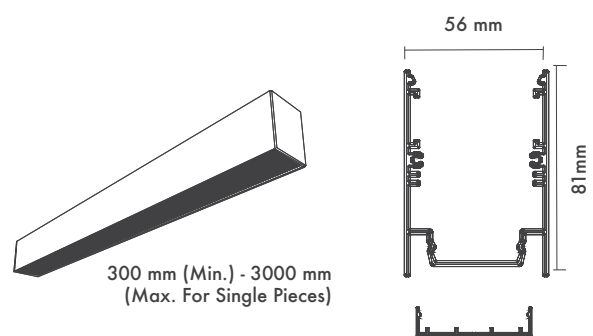

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:80mm W:56mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise




Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:80mm G:56mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

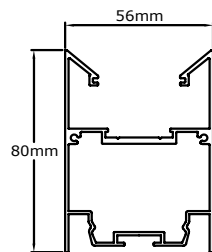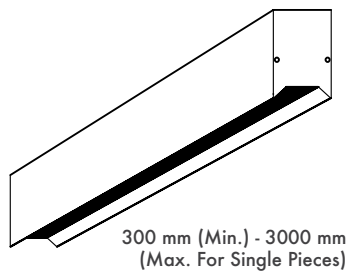

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Width : 95mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:45mm W:113mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44



Delik Genişliği : 95mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:45mm G:113mm

	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

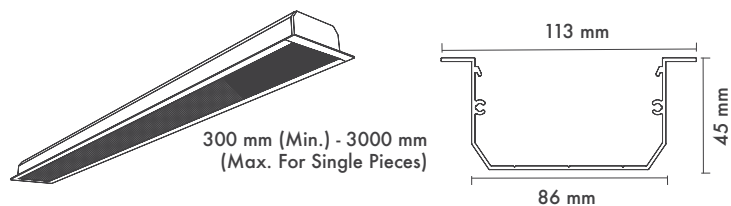

Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



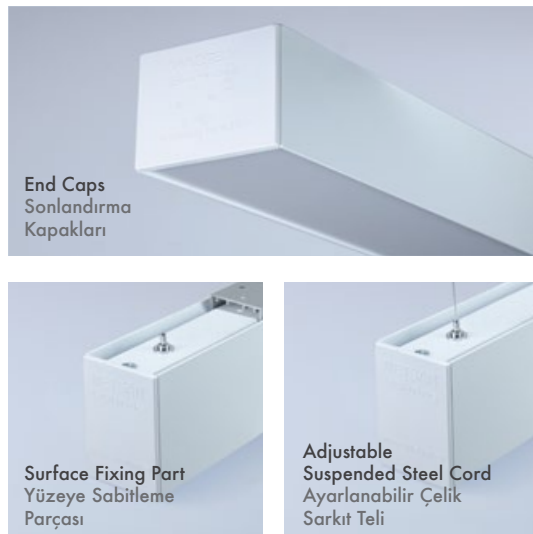

Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:82mm W:87mm

Pendant Cord : Stainless Steel (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:82mm G:87mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

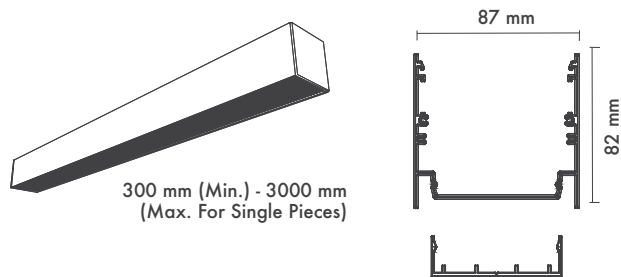

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016


Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550




	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82

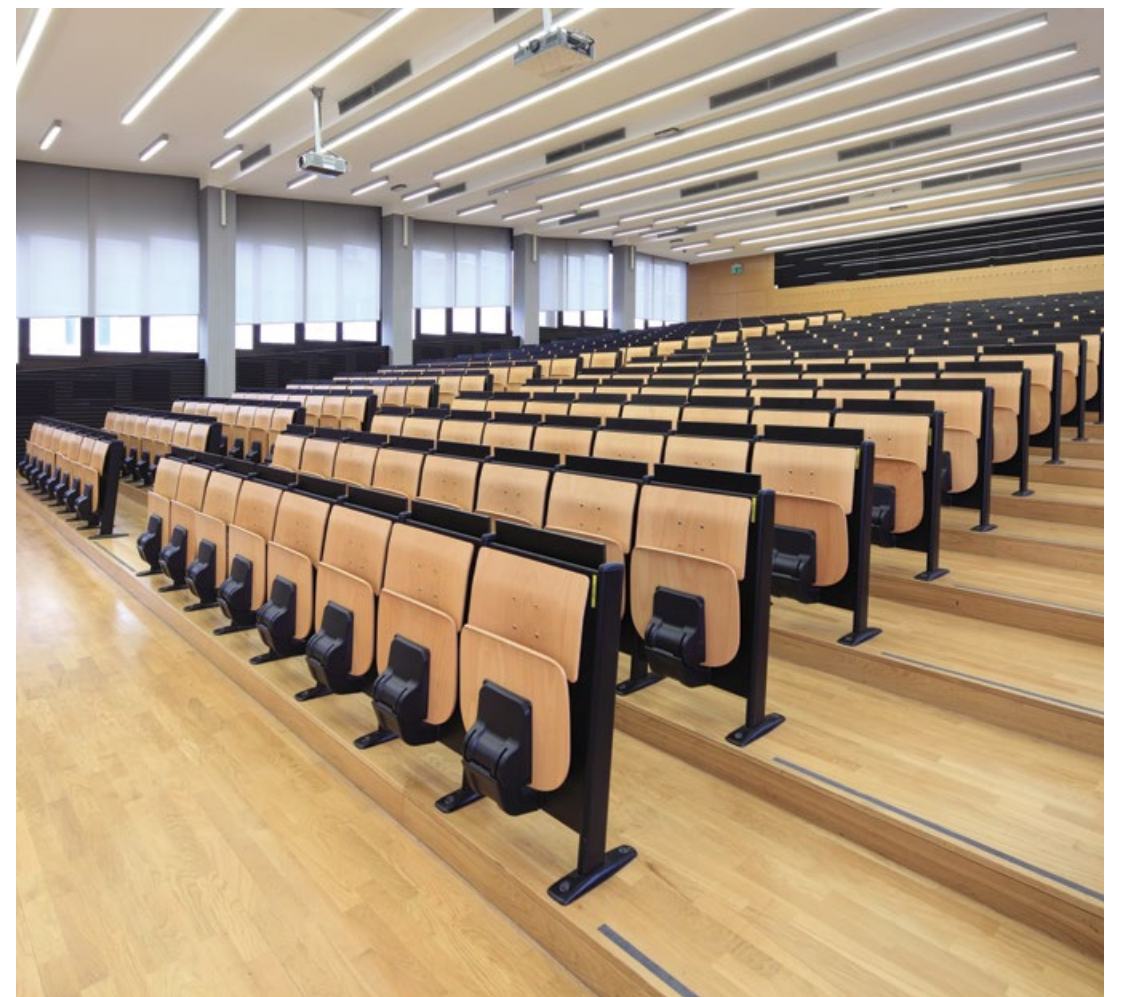



Lehman 56 Square / Rectangle

Product Code: MS 56-SR
Model No: 13556001SR


Product Specification / Ürün Özellikleri**Installation Type :** Surface or Suspended**Body and Heatsink :** Aluminium Extrusion Body and Aluminium Injection End Caps**Diffuser Options :** Opal Polycarbonate**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP20 / IP44**Dimming Options :** Phase-Cut / 1-10 V / DALI**Profile Dimensions :** H:81mm W:56mm**Pendant Cord :** Stainless Stell (2m max.)**Montaj Tipi :** Sıva Üstü veya Sarkıt**Gövde ve Soğutucu :** Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları**Difüzör Çeşitler :** Opal Polikarbon**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP20 / IP44**Dim Opsiyonları :** Triak / 1-10 V / DALI**Profil Ölçüleri :** Y:81mm G:56mm**Sarkıt Tel :** Paslanmaz Çelik (2m max.)**Beam Informations And Technicals / Teknik ve Açısal Bilgiler**

110°

Customizable Options



- 1200x1200mm




- 1200x2400mm



- 2000x3000mm

* Product powers and lumens change according to product lengths.

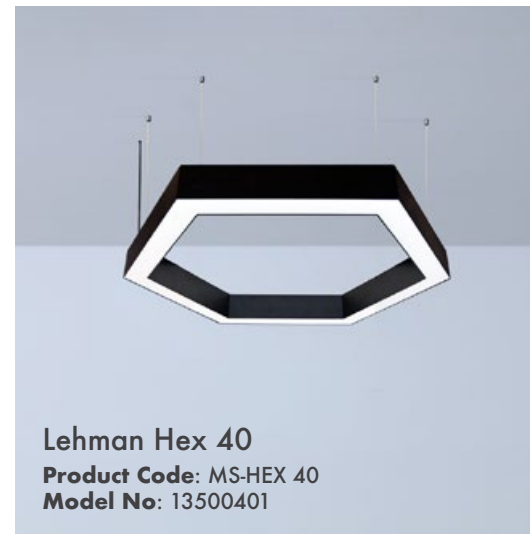Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

Lehman Hex 40

Product Code: MS-HEX 40
Model No: 13500401




Auto-Machine
Cut Corners
Otomatik Makine
Kesimli Köşeler

Adjustable
Suspended
Steel Cord
Ayarlanabilir
Çelik Sarkıt Teli



Product Specification / Ürün Özellikleri**Installation Type :** Surface or Suspended**Shape :** Hexagon**Body :** Aluminium Extrusion Body**Diffuser Options :** Opal Polycarbonate / Microprismatic**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP20 / IP44**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:81mm W:524mm**Pendant Cord :** Stainless Stell (2m max.)**Montaj Tipi :** Sıva Üstü veya Sarkıt**Görünüm :** Altıgen**Gövde ve Soğutucu :** Alüminyum Ekstrüzyon Gövde**Difüzör Çeşitler :** Opal Polikarbon / Mikroprizmatik**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP20 / IP44**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:81mm G:524mm**Sarkıt Tel :** Paslanmaz Çelik (2m max.)**Beam Informations And Technicals / Teknik ve Açısal Bilgiler**

110°

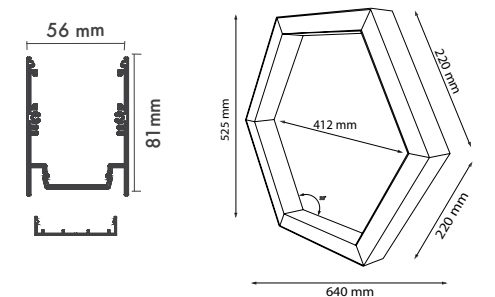


	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	1	3780lm	3816 lm	3960 lm	36 Watt	>82

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

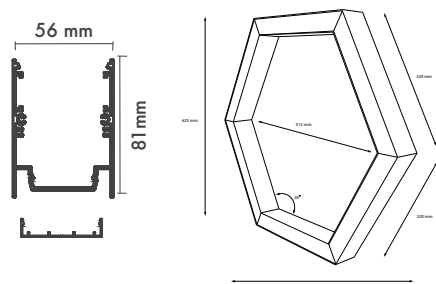**Product Specification / Ürün Özellikleri****Installation Type :** Surface or Suspended**Shape :** Hexagon**Body :** Aluminium Extrusion Body**Diffuser Options :** Opal Polycarbonate / Microprismatic**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP20 / IP44**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:81mm W:624mm**Pendant Cord :** Stainless Stell (2m max.)**Montaj Tipi :** Sıva Üstü veya Sarkıt**Görünüm :** Altıgen**Gövde ve Soğutucu :** Alüminyum Ekstrüzyon Gövde**Difüzör Çeşitler :** Opal Polikarbon / Mikroprizmatik**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP20 / IP44**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:81mm G:624mm**Sarkıt Tel :** Paslanmaz Çelik (2m max.)**Beam Informations And Technicals / Teknik ve Açısal Bilgiler**

	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	1	5670 lm	5724 lm	5940 lm	54 Watt	>82


Available Finishes
Uygulama Renkleri● Textured White
Ral 9016● Textured Grey
Ral 9006● Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550**Product Specification / Ürün Özellikleri****Installation Type :** Surface or Suspended**Shape :** Hexagon**Body :** Aluminium Extrusion Body**Diffuser Options :** Opal Polycarbonate / Microprismatic**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP20 / IP44**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:81mm W:724mm**Pendant Cord :** Stainless Stell (2m max.)**Montaj Tipi :** Sıva Üstü veya Sarkıt**Görünüm :** Altıgen**Gövde ve Soğutucu :** Alüminyum Ekstrüzyon Gövde**Difüzör Çeşitler :** Opal Polikarbon / Mikroprizmatik**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP20 / IP44**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:81mm G:724mm**Sarkıt Tel :** Paslanmaz Çelik (2m max.)**Beam Informations And Technicals / Teknik ve Açısal Bilgiler**

	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	1	7245 lm	7314 lm	7590 lm	69 Watt	>82

Available Finishes
Uygulama Renkleri● Textured White
Ral 9016● Textured Grey
Ral 9006● Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550



Lehman Hex 70
Product Code: MS-HEX 70
Model No: 13500701

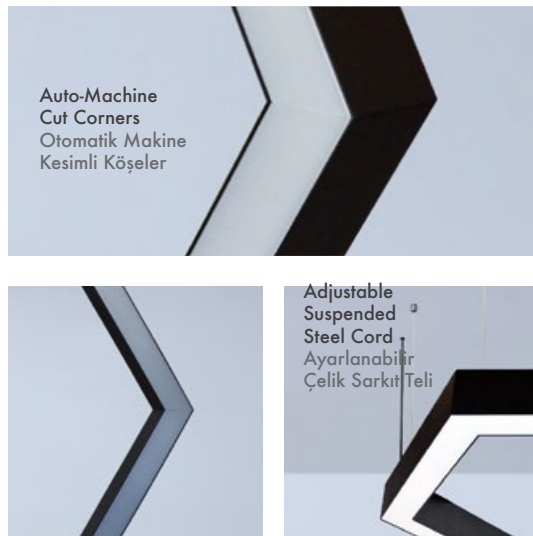

Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Shape : Hexagon

Body : Aluminium Extrusion Body

Diffuser Options : Opal Polycarbonate / Microprismatic

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:824mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Görünüm : Altıgen

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde

Difüzör Çeşitler : Opal Polikarbon / Mikroprizmatik

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:81mm G:824mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

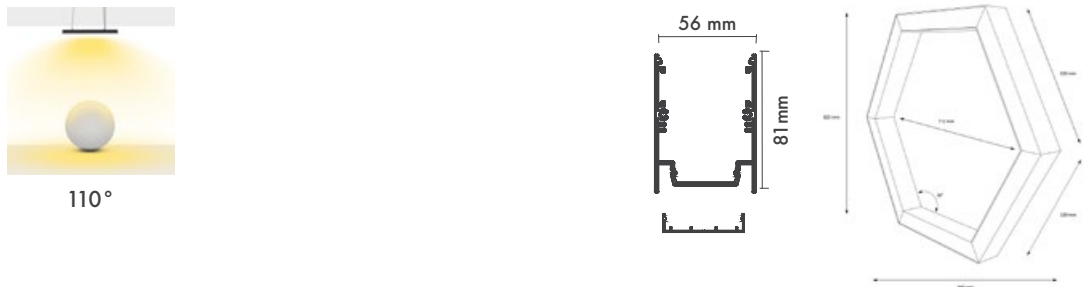

	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	1	8820 lm	8904 lm	9240 lm	84 Watt	>82



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Lehman Hex 80
Product Code: MS-HEX 80
Model No: 13500801



Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Shape : Hexagon

Body : Aluminium Extrusion Body

Diffuser Options : Opal Polycarbonate / Microprismatic

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:924mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Görünüm : Altıgen

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde

Difüzör Çeşitler : Opal Polikarbon / Mikroprizmatik

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:81mm G:924mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	1	10.710 lm	10.812 lm	11.220 lm	102 Watt	>82



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



VOG FAMILY

With its extraordinary type, different sizes, high-quality components, well-designed structure, Vog products will offer you a joyful journey to find what you desire while decorating your space. Vog offers you 2 installation variants.

Surface Mounted
Suspended

Best in class linear lighting with an aluminium extrusion body and aluminium injected end caps. No light leak from the end caps. The favored family group in the linear light category in the all areas. The best in its category with its high efficient smd led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Vog product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



End Caps
Sonlandırma
Kapakları

Moveable and Adjustable
Suspended Steel Cord
Hareket Ettirilebilir ve
Ayarlanabilir Çelik Sarkıt Teli

Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:48mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:81mm G:48mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

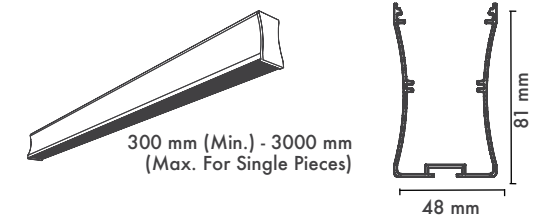

Vog 46 Surface

Surface Mounted Linear
Light

P: 412



Vog 56 Surface

Surface Mounted Linear
Light

P: 414



Vog 86 Surface

Surface Mounted Linear
Light

P: 416



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016



Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82

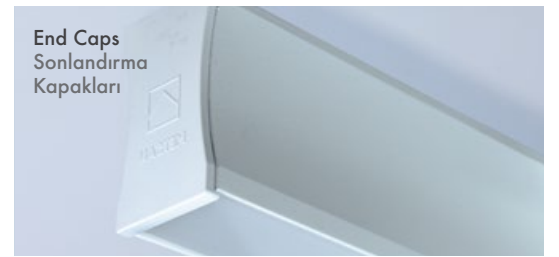

Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:56mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI


Ürün Ölçüleri : Y:81mm G:56mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açıl Bilgiler



110°

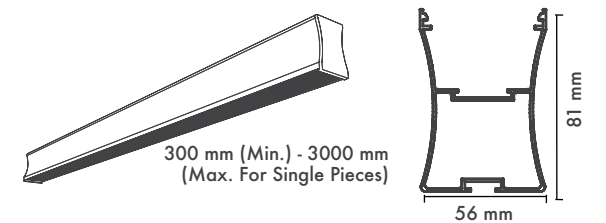

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82



Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:80mm W:87mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise




Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:80mm G:87mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

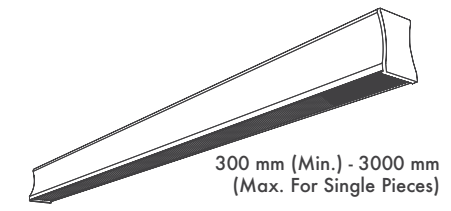

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82



Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:56mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI


Ürün Ölçüleri : Y:81mm G:56mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



110°

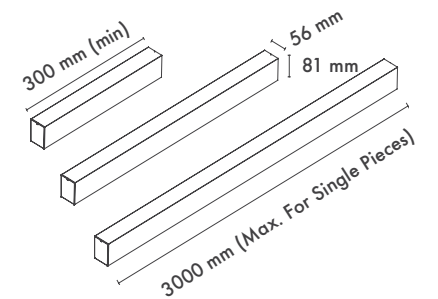

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82



Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:82mm W:87mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI


Ürün Ölçüleri : Y:82mm G:87mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



110°

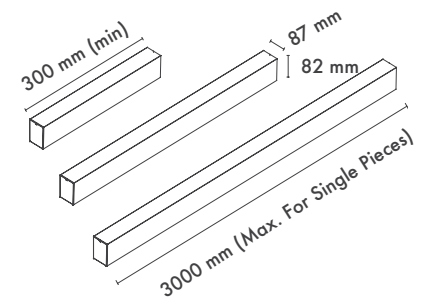

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82
Osram	0600mm	2	2354 lm	2438 lm	2622 lm	23 Watt	>82
Osram	1200mm	2	4608 lm	4876 lm	5244 lm	46 Watt	>82
Osram	2400mm	2	9116 lm	9752 lm	10.488 lm	92 Watt	>82
Osram	3000mm	2	11.370 lm	12.190 lm	13.110 lm	115 Watt	>82



Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:86mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI


Ürün Ölçüleri : Y:81mm G:86mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



95°

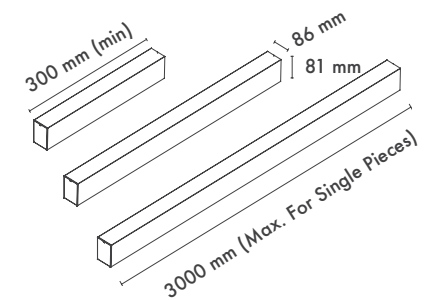

	Length - Uzunluk	Modul	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	3	1620 lm	1693 lm	1943 lm	18 Watt	>85
Osram	1200mm	6	3240 lm	3386 lm	3636	36 Watt	>85
Osram	2400mm	12	6480 lm	6772 lm	7272 lm	72 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Duet 86 Surface

Product Code: MS 86-6
Model No: 13586006

Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram / Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:81mm W:86mm

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram / Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI


Ürün Ölçüleri : Y:81mm G:86mm

Sarkıt Tel : Paslanmaz Çelik (2m max.)

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



110°

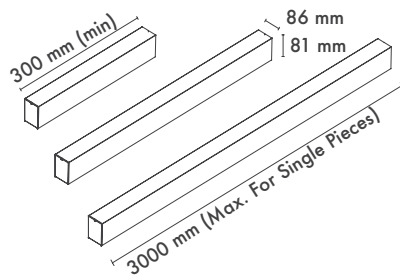

	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	1200mm	1	3136 lm	3386 lm	3636	32 Watt	>82
Osram	1200mm	2	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	Module	x 2	1080 lm	1140 lm	1200 lm	12 Watt	>85




Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

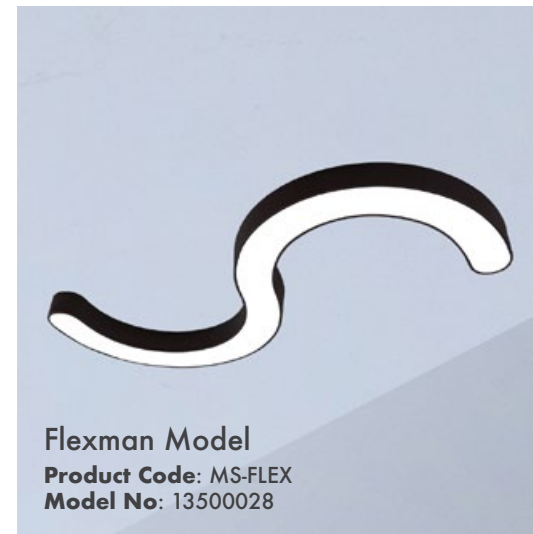

Flexman Model

Product Code: MS-FLEX
Model No: 13500028

Product Specification / Ürün Özellikleri

Installation Type : Surface or Suspended

Body : Aluminium Extrusion Body

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Meanwell

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : Özelleştirilebilir

Pendant Cord : Stainless Stell (2m max.)

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde: Alüminyum Ekstrüzyon Gövde

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Meanwell

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Customizable

Sarkıt Tel : Paslanmaz Çelik (2m max.)



110°



Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	Length - Uzunluk	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram Module	1000 mm	105 lm/w	110 lm/w	115 lm/w	50 Watt	>82



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550




SEKO FAMILY

Solution for market lightings. Extraordinary type, different sizes, high-quality components, well-designed structure, Seko products will offer you a joyful journey to find what you desire while decorating your space. Vog offers you 4 installation variants.

Surface Mounted
Suspended
Track Mounted
Recessed (can be optional)

Best in class market lighting with an aluminum extrusion body and aluminium end caps. No light leak from the end caps. The favored family group in the linear light category in the all areas. The best in its category with its high efficient smd led and 50,000+ lifetime driver. The best PMMA lens for higher luminous.

This product guide will help you to find what you're looking for by finding the range of Seko product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.

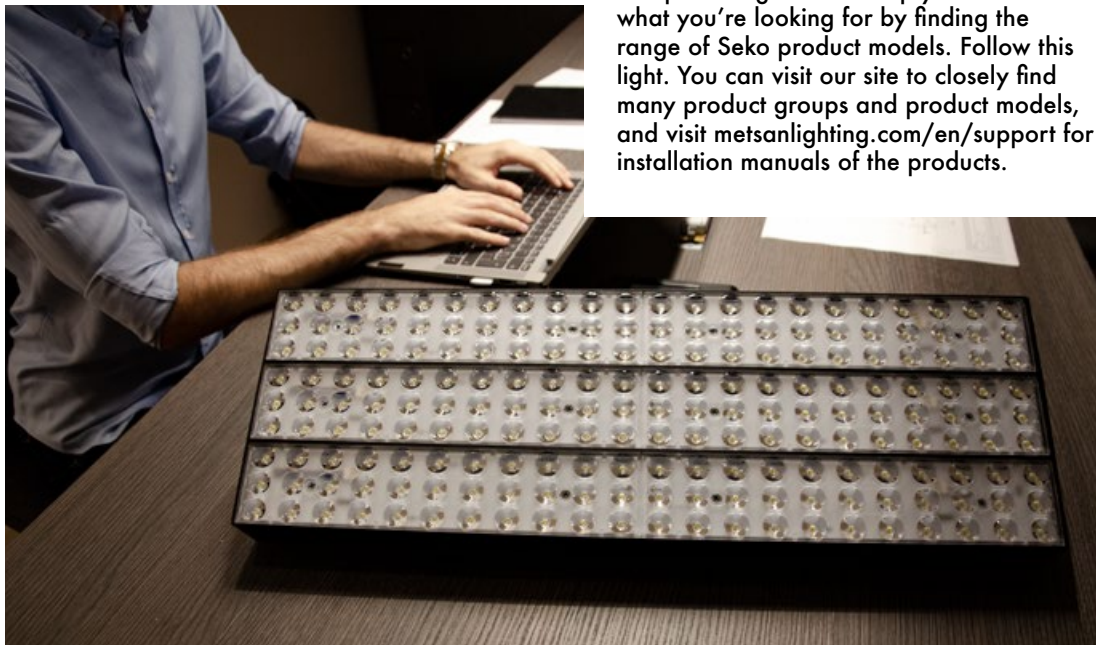

Seko Linear Track V1
Track Linear Light

P: 427



Seko Linear Track V3
Track Linear Light

P: 429



Seko Linear Track V4
Adjustable
Track Linear Light

P: 431



Seko Track L1
Track Light

P: 433



Seko Track L2
Track Light

P: 427



Seko Track R1
Track Light

P: 429



Seko Track R2
Track Light

P: 431



Seko Linear Track V1
Adjustable
Track Linear Light

P: 433



Seko Linear Track V1

Product Code: MST 64 V1
Model No: 13700164



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium End Caps

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Socket Types : Monophase / Triphase / DALI

Product Dimensions : H:49mm W:64mm

Montaj Tipi : Sıva Üstü / Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Sonlandırma Kapakları

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI

Soket Tipleri : Monophase / Triphase / DALI




Ürün Ölçüleri : Y:49mm G:64mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

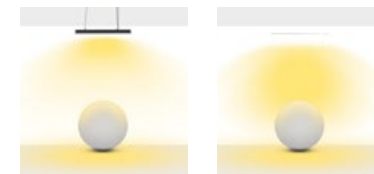

30° / 60° /
90°

Assymetric /
Double Assymetric

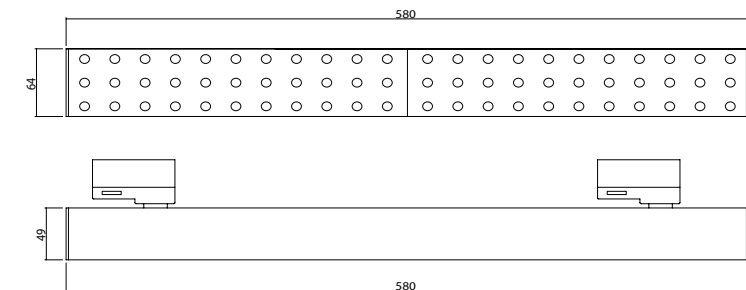

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016


Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	0580mm	2325 lm	2400 lm	2445 lm	15 Watt	>80
Osram	0870mm	3720 lm	3840 lm	3912 lm	24 Watt	>80
Osram	1160mm	4650 lm	4800 lm	4890 lm	30 Watt	>80
Osram	1450mm	5580 lm	5760 lm	5868 lm	36 Watt	>80
Osram	0580mm	3720 lm	3840 lm	3912 lm	24 Watt	>80
Osram	0870mm	5580 lm	5760 lm	5868 lm	36 Watt	>80
Osram	1160mm	7130 lm	7360 lm	7498 lm	46 Watt	>80
Osram	1450mm	8990 lm	9280 lm	9454 lm	58 Watt	>80

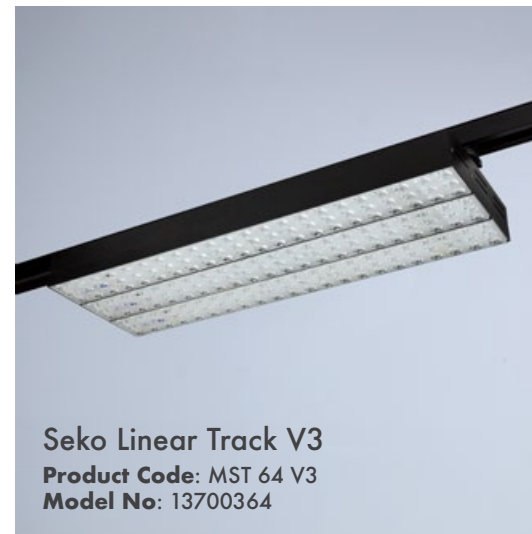

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium End Caps

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Socket Types : Monophase / Triphase / DALI

Product Dimensions : H:49mm W:192mm L:580mm

Montaj Tipi : Sıva Üstü / Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Sonlandırma Kapakları

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI

Soket Tipleri : Monophase / Triphase / DALI

Ürün Ölçüleri : Y:49mm G:192mm U:580mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

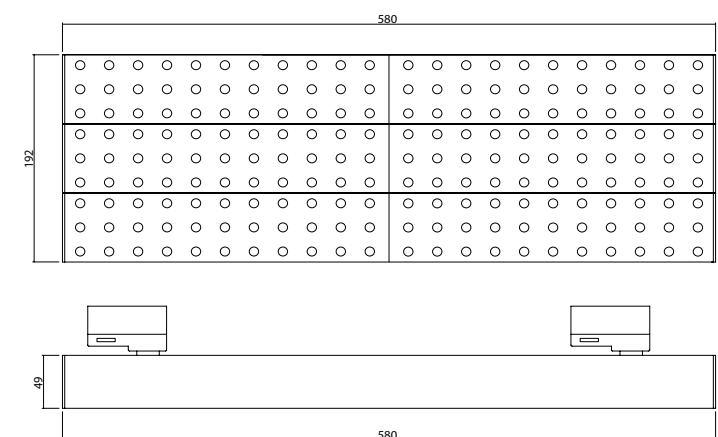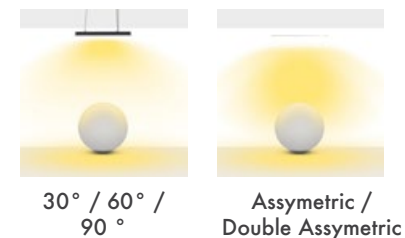

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	0580mm	6200 lm	6400 lm	6520 lm	40 Watt	>80
Osram	0580mm	9300 lm	9600 lm	9780 lm	60 Watt	>80
Osram	0580mm	10850 lm	11200 lm	11410 lm	70 Watt	>80



Seko Linear Track V4 Adjustable

Product Code: MST 64 V4
Model No: 13700464



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium End Caps

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Socket Types : Monophase / Triphase / DALI

Product Dimensions : H:124mm W:232mm L:299mm

Montaj Tipi : Sıva Üstü / Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Sonlandırma Kapakları

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI


Soket Tipleri : Monophase / Triphase / DALI

Ürün Ölçüleri : Y:124mm G:232mm U:299mm



Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



30° / 60° /
90°



Assymetric /
Double Assymetric

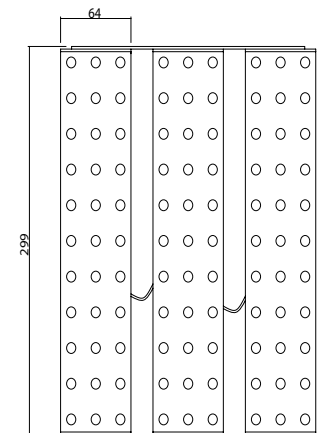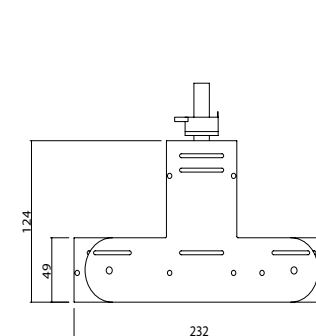

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	0299mm	3720 lm	3840 lm	3912 lm	24 Watt	>80
Osram	0299mm	5580 lm	5760 lm	5868 lm	36 Watt	>80
Osram	0299mm	7440 lm	7680 lm	7824 lm	48 Watt	>80



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium End Caps

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Socket Types : Monophase / Triphase / DALI

Product Dimensions : H:135mm W:64mm L:290mm

Montaj Tipi : Sıva Üstü / Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Sonlandırma Kapakları

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI



Socket Tipleri : Monophase / Triphase / DALI

Ürün Ölçüleri : Y:135mm G:64mm U:290mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



30° / 60° /
90°

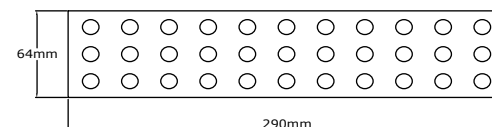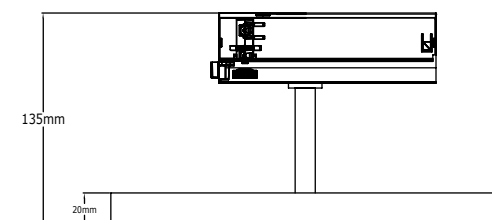

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium End Caps

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Socket Types : Monophase / Triphase / DALI

Product Dimensions : H:135mm W:64mm L:290mm

Montaj Tipi : Sıva Üstü / Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Sonlandırma Kapakları

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI



Soket Tipleri : Monophase / Triphase / DALI

Ürün Ölçüleri : Y:135mm G:64mm U:290mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



30° / 60° / 90°

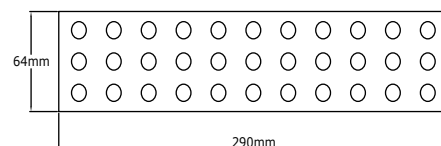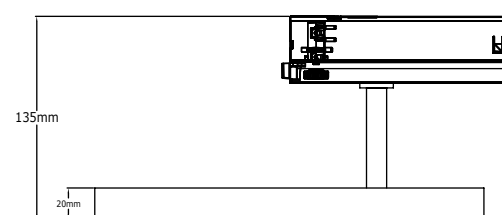

	Length - Uzunluk	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	0299mm	3720 lm	3840 lm	3912 lm	24 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium End Caps

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Socket Types : Monophase / Triphase / DALI

Product Dimensions : H:135mm W:64mm L:290mm

Montaj Tipi : Sıva Üstü / Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Sonlandırma Kapakları

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI



Soket Tipleri : Monophase / Triphase / DALI

Ürün Ölçüleri : Y:135mm G:64mm U:290mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



30° / 60° / 90°

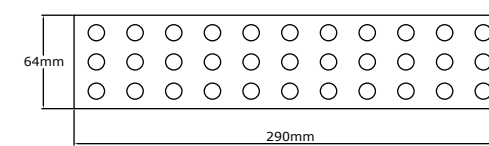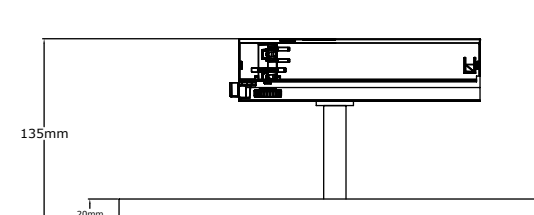

	Length - Uzunluk	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	0299mm	3720 lm	3840 lm	3912 lm	24 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Track Mounted

Body and Heatsink : Aluminium Extrusion Body and Aluminium End Caps

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Socket Types : Monophase / Triphase / DALI

Product Dimensions : H:135mm W:64mm L:290mm

Montaj Tipi : Sıva Üstü / Raya Monte

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Sonlandırma Kapakları

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI


Soket Tipleri : Monophase / Triphase / DALI

Ürün Ölçüleri : Y:135mm G:64mm U:290mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



30° / 60° / 90°

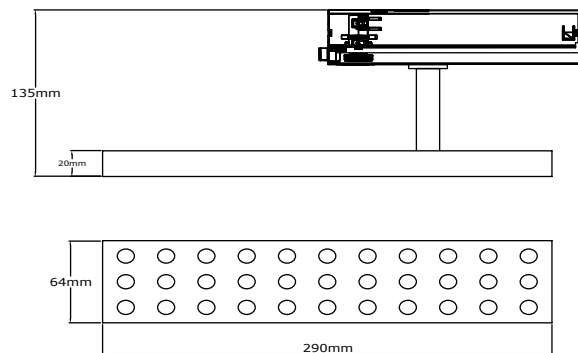

	Length - Uzunluk	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	0299mm	3720 lm	3840 lm	3912 lm	24 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	0299mm	3720 lm	3840 lm	3912 lm	24 Watt	>80
Osram	0299mm	5580 lm	5760 lm	5868 lm	36 Watt	>80
Osram	0299mm	7440 lm	7680 lm	7824 lm	48 Watt	>80



Product Specification / Ürün Özellikleri

Installation Type : Surface M. / Track Mounted

Montaj Tipi : Sıva Üstü / Raya Monte

Body and Heatsink : Aluminium Extrusion Body and Aluminium End Caps

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Sonlandırma Kapakları

Lens : PMMA

Lens : PMMA

Body Color : Electrostatic Powder Coating

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Sürücü : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Koruma Sınıfı : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Dim Opsiyonları : Triak / 1-10 V / DALI

Socket Types : Monophase / Triphase / DALI

Soket Tipleri : Monophase / Triphase / DALI


Product Dimensions : H:103mm W:64mm L:295mm

Ürün Ölçüleri : Y:103mm G:64mm U:295mm


Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



30° / 60° /
90°



Assymetric /
Double Assymetric

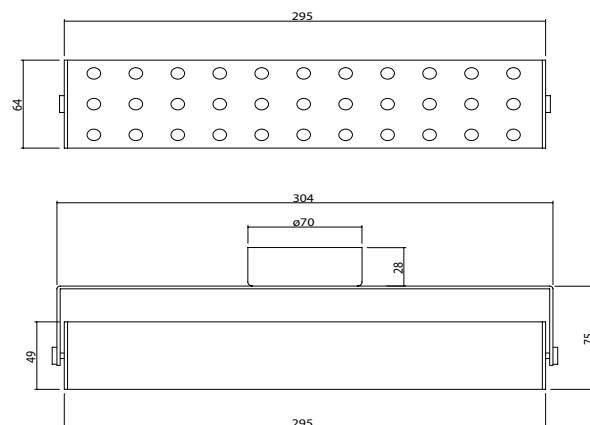

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



	Length - Uzunluk	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	0295mm	3100 lm	3200 lm	3260 lm	20 Watt	>80
Osram	0295mm	4650 lm	4800 lm	4890 lm	30 Watt	>80

LOTUS FAMILY

With its classic type, different sizes, high-quality components, well-designed structure, Lotus products will offer you a joyful journey to find what you desire while decorating your space. Lotus offers you 5 installation variants.

T-Bar
Clip-in
Recessed
Surface Mounted
Suspended

Best in class panel lighting with high lumen and low depth structure. The favored family group in the panel light category in the all areas. The best in its category with its high efficient smd led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Lotus product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Hole Size : \varnothing 105x105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:120mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP54

Delik Çapı : \varnothing 105x105mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:120mm

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler



105°

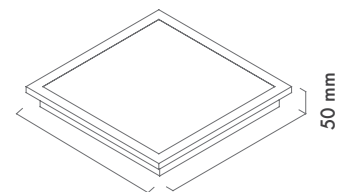

120 mm / 150 mm / 180 mm
220 mm / 300 mm

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Hole Size : 160x160mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:175mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP54

Delik Çapı : 160x160mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:175mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

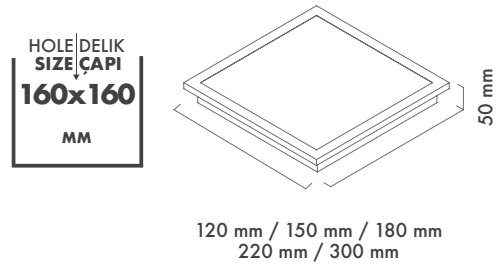

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:166mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:166mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

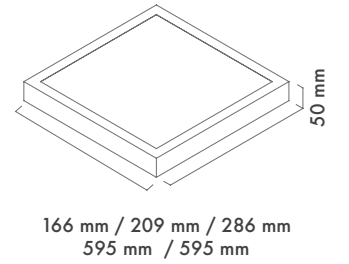

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:209mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram



Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:209mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:235mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:235mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

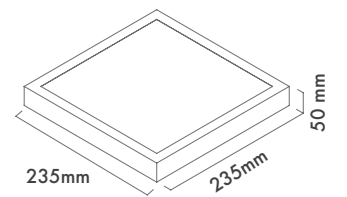

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:286mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram



Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:286mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Pendant

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

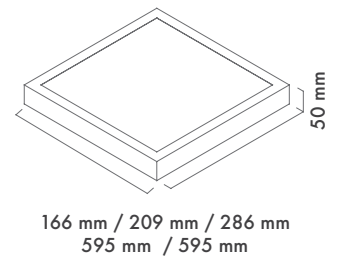

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung	3900 lm	3950 lm	3990 lm	700	32 Watt	>80
Samsung	5040 lm	5080 lm	5120 lm	900	42 Watt	>80



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



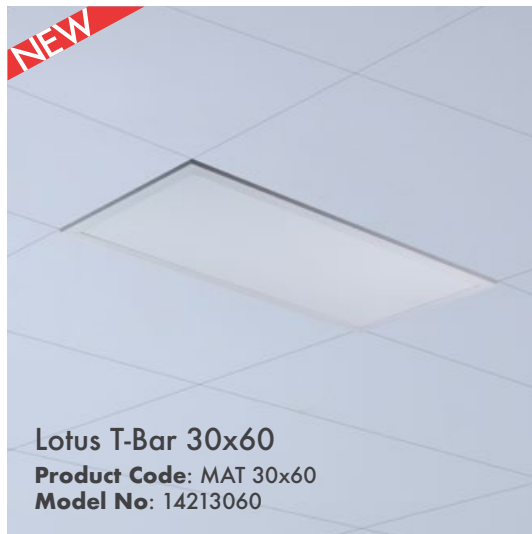

Lotus T-Bar 30x60

Product Code: MAT 30x60
Model No: 14213060

Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:32mm W:295mm L:595mm

Montaj Tipi : Taşünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:32mm G:295mm U:595mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

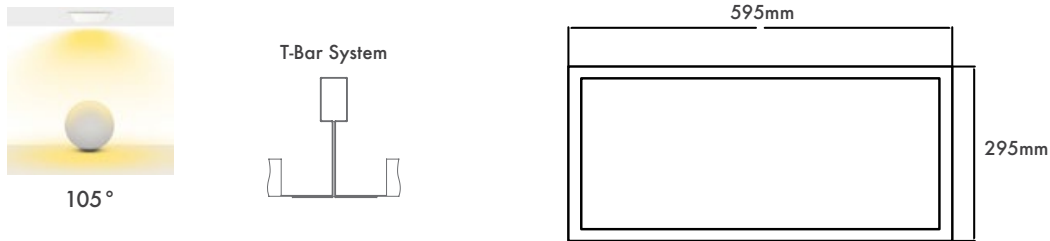

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Samsung	2690 lm	2715 lm	2790 lm	24 Watt	>80
Samsung	3370 lm	3390 lm	3420 lm	30 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Lotus T-Bar 30x120

Product Code: MAT 30x120
Model No: 14213120

Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:295mm L:1195mm

Montaj Tipi : Taşünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:295mm U:1195mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

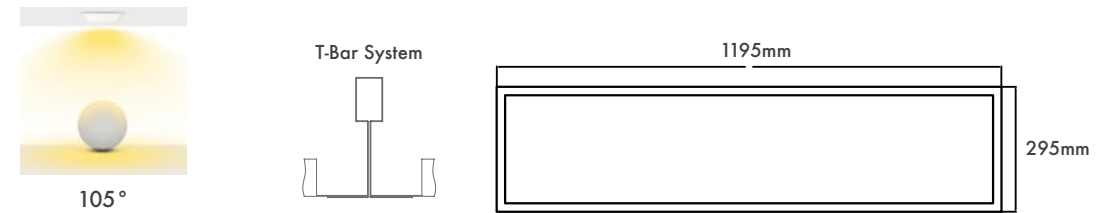

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Samsung	4495 lm	4520 lm	4590 lm	40 Watt	>80
Samsung	5385 lm	5425 lm	5490 lm	48 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Lotus T-Bar 60x120
Product Code: MAT 60x120
Model No: 14216120

Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:55mm W:595mm L:1195mm

Montaj Tipi : Taşünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:55mm G:595mm U:1195mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

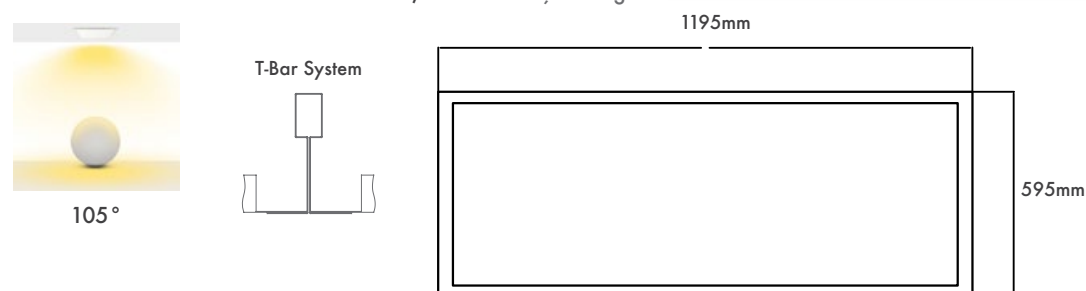

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Samsung	8110 lm	8140 lm	8190 lm	72 Watt	>80
Samsung	9450 lm	9495 lm	9520 lm	84 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Lotus Clip-in 60x60
Product Code: MAC 60x60
Model No: 14116060

Product Specification / Ürün Özellikleri

Installation Type : Clip-in Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Clip-in Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler

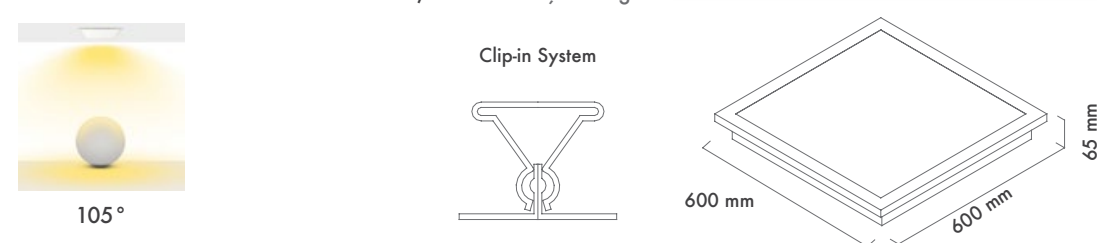

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung	3900 lm	3950 lm	3990 lm	700	32 Watt	>80
Samsung	5040 lm	5080 lm	5120 lm	900	42 Watt	>80



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



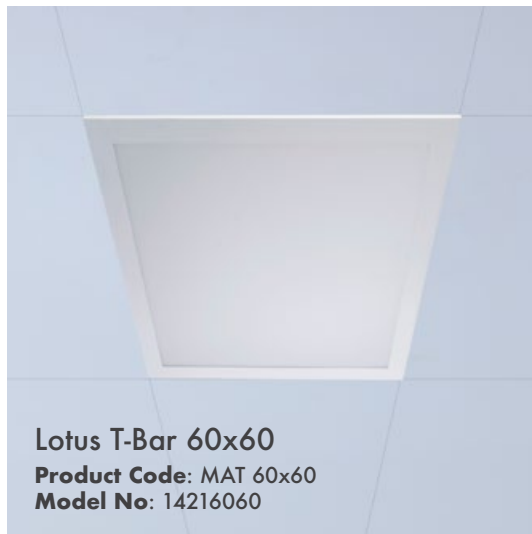

Lotus T-Bar 60x60

Product Code: MAT 60x60
Model No: 14216060

Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Taşünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI


Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler




105°

T-Bar System



595 mm

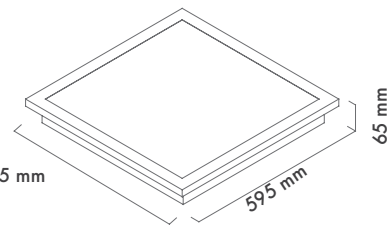

65 mm

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung	3900 lm	3950 lm	3990 lm	700	32 Watt	>80
Samsung	5040 lm	5080 lm	5120 lm	900	42 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Lotus Segment T-Bar 60x60

Product Code: MAT-SEG 60x60
Model No: 24216060

Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:28mm W:595mm

Montaj Tipi : Taşünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI


Ürün Ölçüleri : Y:28mm G:595mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler




110°

T-Bar System



595 mm

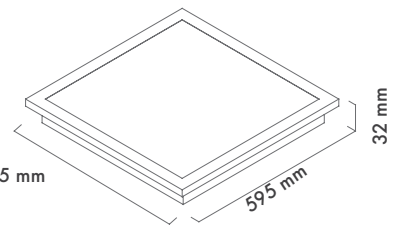

32 mm

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Samsung	4450 lm	4750 lm	5000 lm	42 Watt	>80
Samsung	5400 lm	5700 lm	6000 lm	50 Watt	>80



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



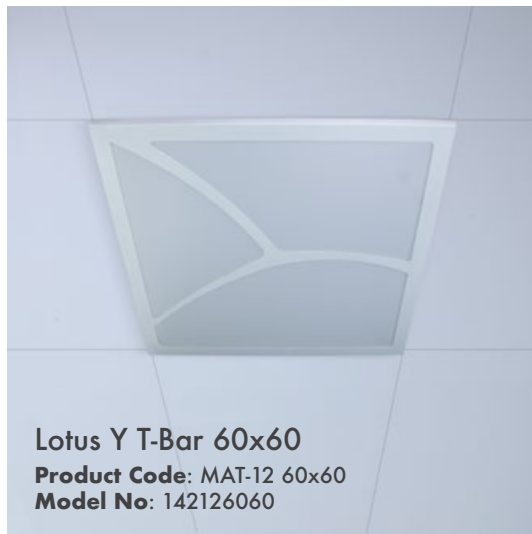

Lotus Y T-Bar 60x60

Product Code: MAT-12 60x60

Model No: 142126060

Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Taşünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI




Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

T-Bar System

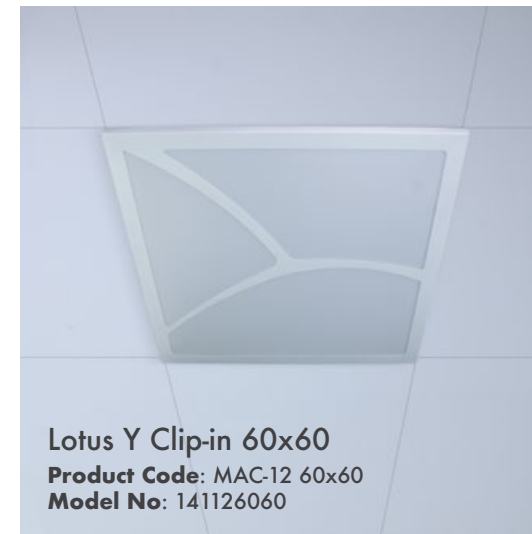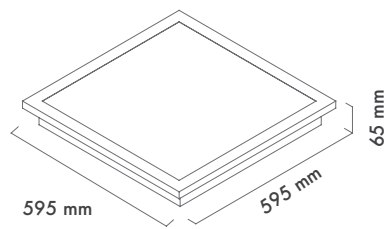

Lotus Y Clip-in 60x60

Product Code: MAC-12 60x60

Model No: 141126060

Product Specification / Ürün Özellikleri

Installation Type : Clip-in Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Clip-in Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 1-10 V / DALI



Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

Clip-in System

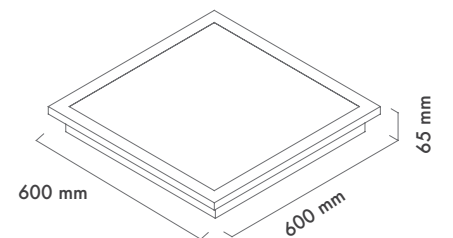

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung	3900 lm	3950 lm	3990 lm	700	32 Watt	>80
Samsung	5040 lm	5080 lm	5120 lm	900	42 Watt	>80

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung	3900 lm	3950 lm	3990 lm	700	32 Watt	>80
Samsung	5040 lm	5080 lm	5120 lm	900	42 Watt	>80

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceililing

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Glass Option : Tempered Glass

Body Color : Electrostatic Powder Coating

Led Brands : Samsung

Driver Brands : Tridonic

Protection Type : IP65

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Taş Yünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Cam Opsiyonu : Temperli Cam

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP65



Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



T-Bar System

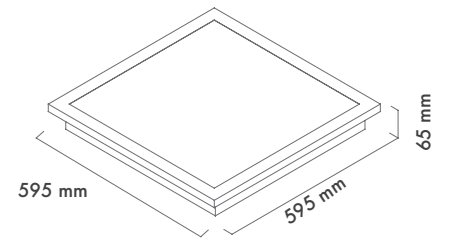

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Samsung	4350 lm	4450 lm	4550 lm	42 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016


Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550




ARTEMIS CAPPADOCIA EFES FAMILY



Artemis 35 Surface

Shade Light


P: 457



Artemis 45 Surface

Shade Light

P: 458



Artemis 65 Surface

Shade Light

P: 459



Artemis 90 Surface

Shade Light


P: 460



Artemis 120 Surface

Shade Light

P: 461



Cappadocia 60 Surface

Ring Light

P: 462



Cappadocia 90 Surface

Ring Light

P: 463



Cappadocia 120 Surface

Ring Light

P: 464



Cappadocia 150 Surface

Ring Light

P: 465



Efes In 60 Suspended

Ring Light

P: 466



Efes In 90 Suspended

Ring Light

P: 467



Efes In 120 Suspended

Ring Light

P: 468



Efes Out 90 Suspended

Ring Light

P: 471



Efes Out 120 Suspended

Ring Light

P: 472

With its modern outlook, different sizes, high-quality components, well-designed structure, Artemis - Cappadocia - Efes products will offer you a joyful journey to find what you desire while decorating your space.

Best in class panel lighting with high lumen and low depth structure. The favored family group in the decorative light category in the all areas. The best in its category with its high efficient smd led and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Artemis - Cappadocia - Efes product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Product Dia : Ø350mm

Dimming Options : DALI

Product Dimensions : H:100mm W:350mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Ürün Çapı : Ø350mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:100mm G:350mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

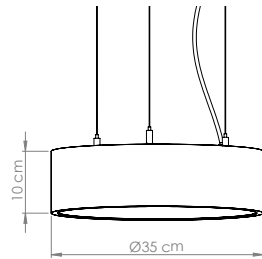

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	2090 lm	2290 lm	2490 lm	22 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Product Dia : Ø450mm

Dimming Options : DALI

Product Dimensions : H:80mm W:450mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Ürün Çapı : Ø450mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:80mm G:450mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

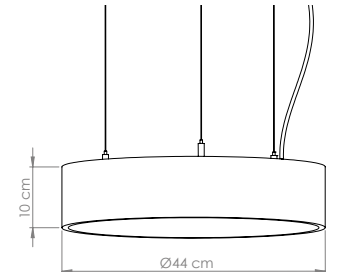

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	3420 lm	3620 lm	3820 lm	36 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Artemis 65 Surface

Product Code: MPS-01 0650
Model No: 34001065

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Product Dia : Ø650mm

Dimming Options : DALI

Product Dimensions : H:80mm W:650mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Ürün Çapı : Ø650mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:80mm G:650mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

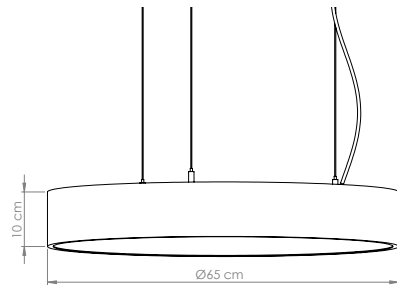

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	5700 lm	5920 lm	6120 lm	60 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Artemis 90 Surface

Product Code: MPS-01 0900
Model No: 34001090

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Product Dia : Ø900mm

Dimming Options : DALI

Product Dimensions : H:100mm W:900mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Ürün Çapı : Ø900mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:100mm G:900mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

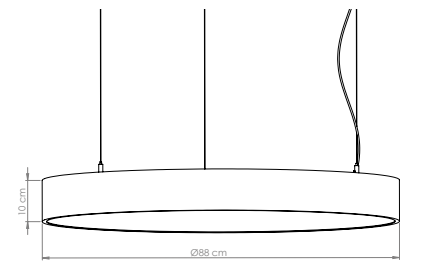

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	9500 lm	9820 lm	10.050 lm	100 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Artemis 120 Surface

Product Code: MPS-01 1200
Model No: 34001120

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Product Dia : Ø1200mm

Dimming Options : DALI

Product Dimensions : H:80mm W:1200mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Ürün Çapı : Ø1200mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:80mm G:1200mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

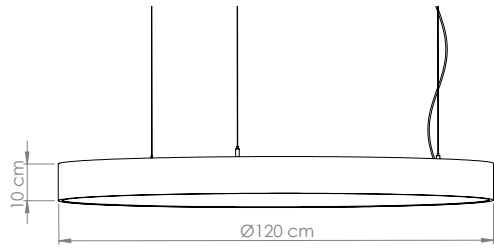

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	11.400 lm	11.720m	12.040 lm	120 Watt	>80



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Cappadocia 60 Surface

Product Code: MPS-02 0600
Model No: 34002060

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Product Dia : Ø600mm

Dimming Options : DALI

Product Dimensions : H:100mm W:600mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Ürün Çapı : Ø600mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:100mm G:600mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

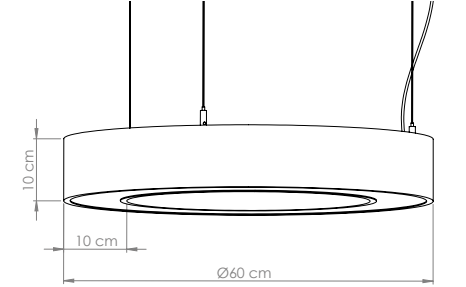

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	3325 lm	3525 lm	3725 lm	35 Watt	>80



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Product Dia : Ø900mm

Dimming Options : DALI

Product Dimensions : H:100mm W:900mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Ürün Çapı : Ø900mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:100mm G:900mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

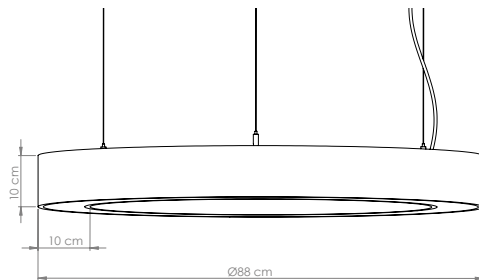

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	5225 lm	5425 lm	5625 lm	55 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Product Dia : Ø1200mm

Dimming Options : DALI

Product Dimensions : H:100mm W:1200mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Ürün Çapı : Ø1200mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:100mm G:1200mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

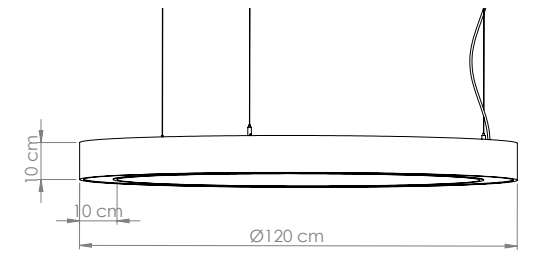

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	7125 lm	7425 lm	7725 lm	75 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Product Dia : Ø1500mm

Dimming Options : DALI

Product Dimensions : H:100mm W:1500mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20

Ürün Çapı : Ø1500mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:100mmG:1500mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

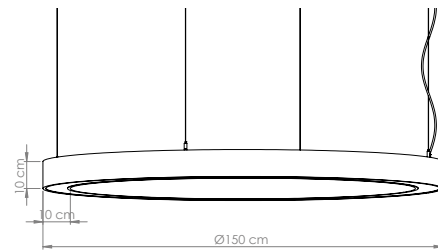

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	9025 lm	9325 lm	9625 lm	95 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Driver Box
DC 24V / 48V CURRENT
DRIVER



Product Specification / Ürün Özellikleri

Installation Type : Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Meanwell

Protection Type : IP20

Product Dia : Ø600mm

Dimming Options : DALI

Product Dimensions : H:52mm W:600mm

Montaj Tipi : Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Meanwell


Koruma Sınıfı : IP20

Ürün Çapı : Ø600mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:52mm G:600mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

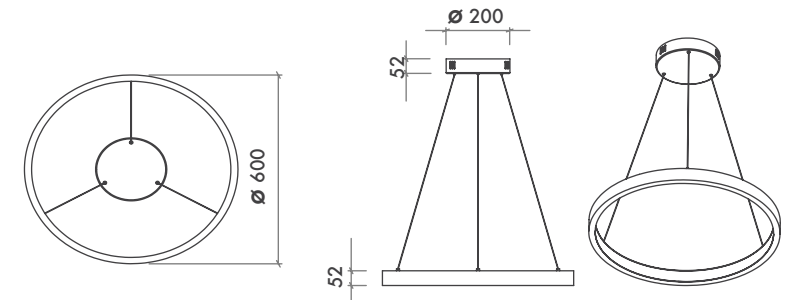

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	3325 lm	3525 lm	3725 lm	35 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Meanwell

Protection Type : IP20

Product Dia : Ø900mm

Dimming Options : DALI

Product Dimensions : H:52mm W:900mm

Montaj Tipi : Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Meanwell


Koruma Sınıfı : IP20

Ürün Çapı : Ø900mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:52mm G:900mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

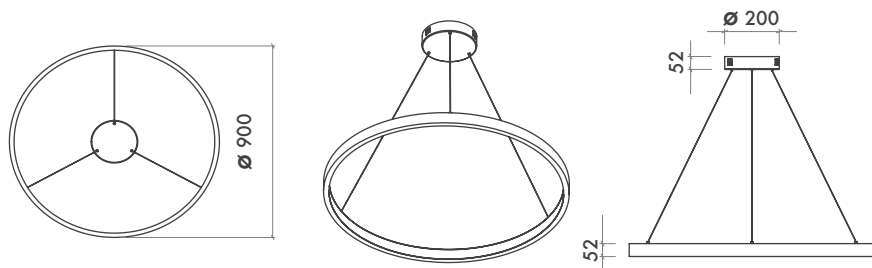

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	5225 lm	5425 lm	5625 lm	55 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Meanwell

Protection Type : IP20

Product Dia : Ø1200mm

Dimming Options : DALI

Product Dimensions : H:52mm W:1200mm

Montaj Tipi : Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Meanwell


Koruma Sınıfı : IP20

Ürün Çapı : Ø1200mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:52mm G:1200mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

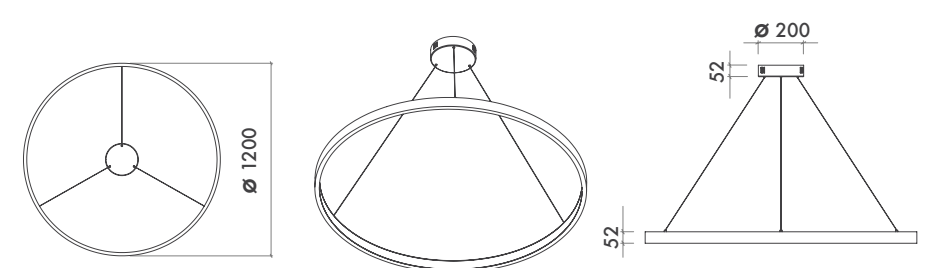

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	7125 lm	7425 lm	7725 lm	75 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Meanwell

Protection Type : IP20

Product Dia : Ø600mm

Dimming Options : DALI

Product Dimensions : H:100mm W:600mm

Montaj Tipi : Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Meanwell


Koruma Sınıfı : IP20

Ürün Çapı : Ø600mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:100mm G:600mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

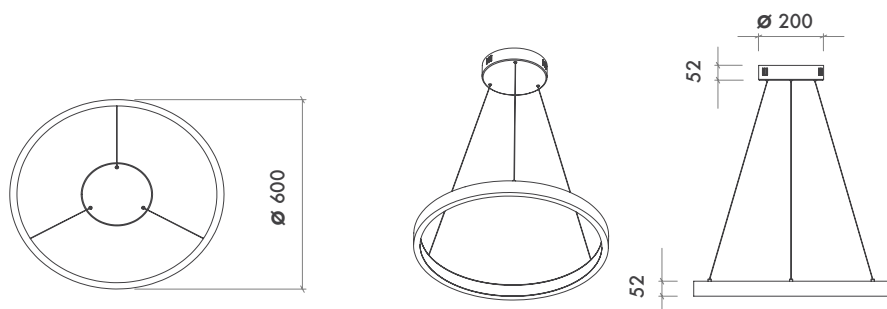

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	3325 lm	3525 lm	3725 lm	35 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Installation Type : Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Meanwell

Protection Type : IP20

Product Dia : Ø900mm

Dimming Options : DALI

Product Dimensions : H:100mm W:900mm

Montaj Tipi : Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Meanwell


Koruma Sınıfı : IP20

Ürün Çapı : Ø900mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:100mm G:900mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

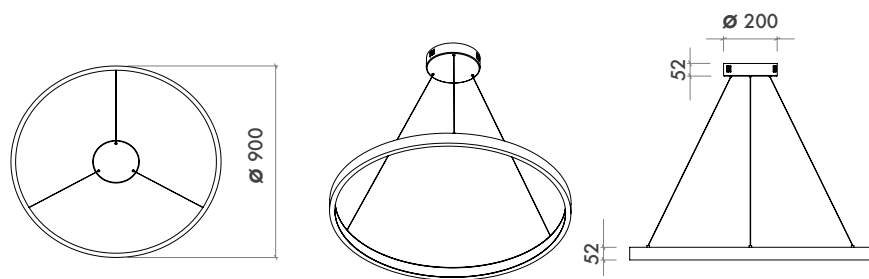

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	5225 lm	5425 lm	5625 lm	55 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Suspended

Body and Heatsink : Aluminium Body and Heat-sink

Diffuser Options : Opal Polystyrene / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Suspension Type : Parallel / Conic

Driver : Tridonic / Meanwell

Protection Type : IP20

Product Dia : Ø1200mm

Dimming Options : DALI

Product Dimensions : H:100mm W:1200mm

Montaj Tipi : Sarkıt

Gövde ve Soğutucu : Alüminyum Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sarkıt Tipi : Paralel / Konik

Sürücü : Tridonic / Meanwell


Koruma Sınıfı : IP20

Ürün Çapı : Ø1200mm

Dim Opsiyonları : DALI

Ürün Ölçüleri : Y:100mm G:1200mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

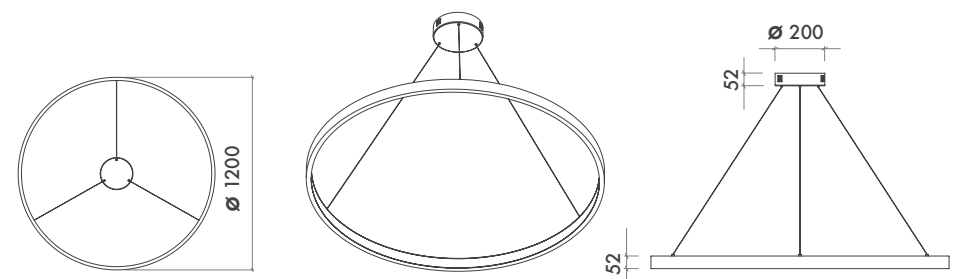

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	7125 lm	7425 lm	7725 lm	75 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Speky Wall

Product Code: MSKD-26
Model No: 16100026

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise / Eaglerise

Protection Type : IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:105mm W:135mm L:200mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise / Eaglerise

Koruma Sınıfı : IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:105mm G:135mm U:200mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

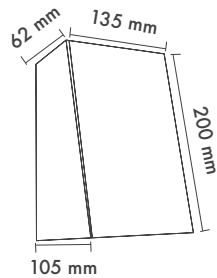

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Fumany Wall

Product Code: MSKD-21
Model No: 16100021



Various Inside Reflectos
Çeşitlendirilebilir İç Reflektolar

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Extrusion Body and aluminium heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:130mm W:100mm L:100mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum ekstrüzyon gövde ve alüminyum soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:130mm G:100mm U:100mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

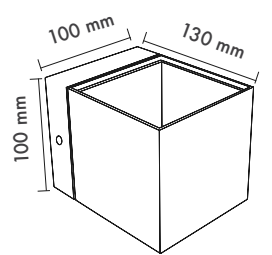

	2700K Lumen	3000K Lumen	4000K Lumen	mA	Watt	CRI
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Valar 100

Product Code: MSYD-13 100
Model No: 16100013

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Extrusion Body and aluminium injection heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:160mm W:100mm L:150mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:160mm G:100mm U:150mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

Cob Led Beams

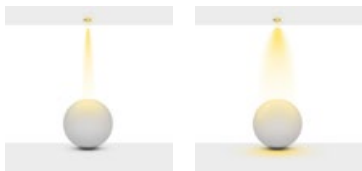


Narrow 25° / Lens

Medium 47°

Smd Led Beams



Wide 85°



	2700K Lumen	3000K Lumen	4000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80
Osram Smd Led	-	540 lm	570 lm	350	6 Watt	>85




Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550

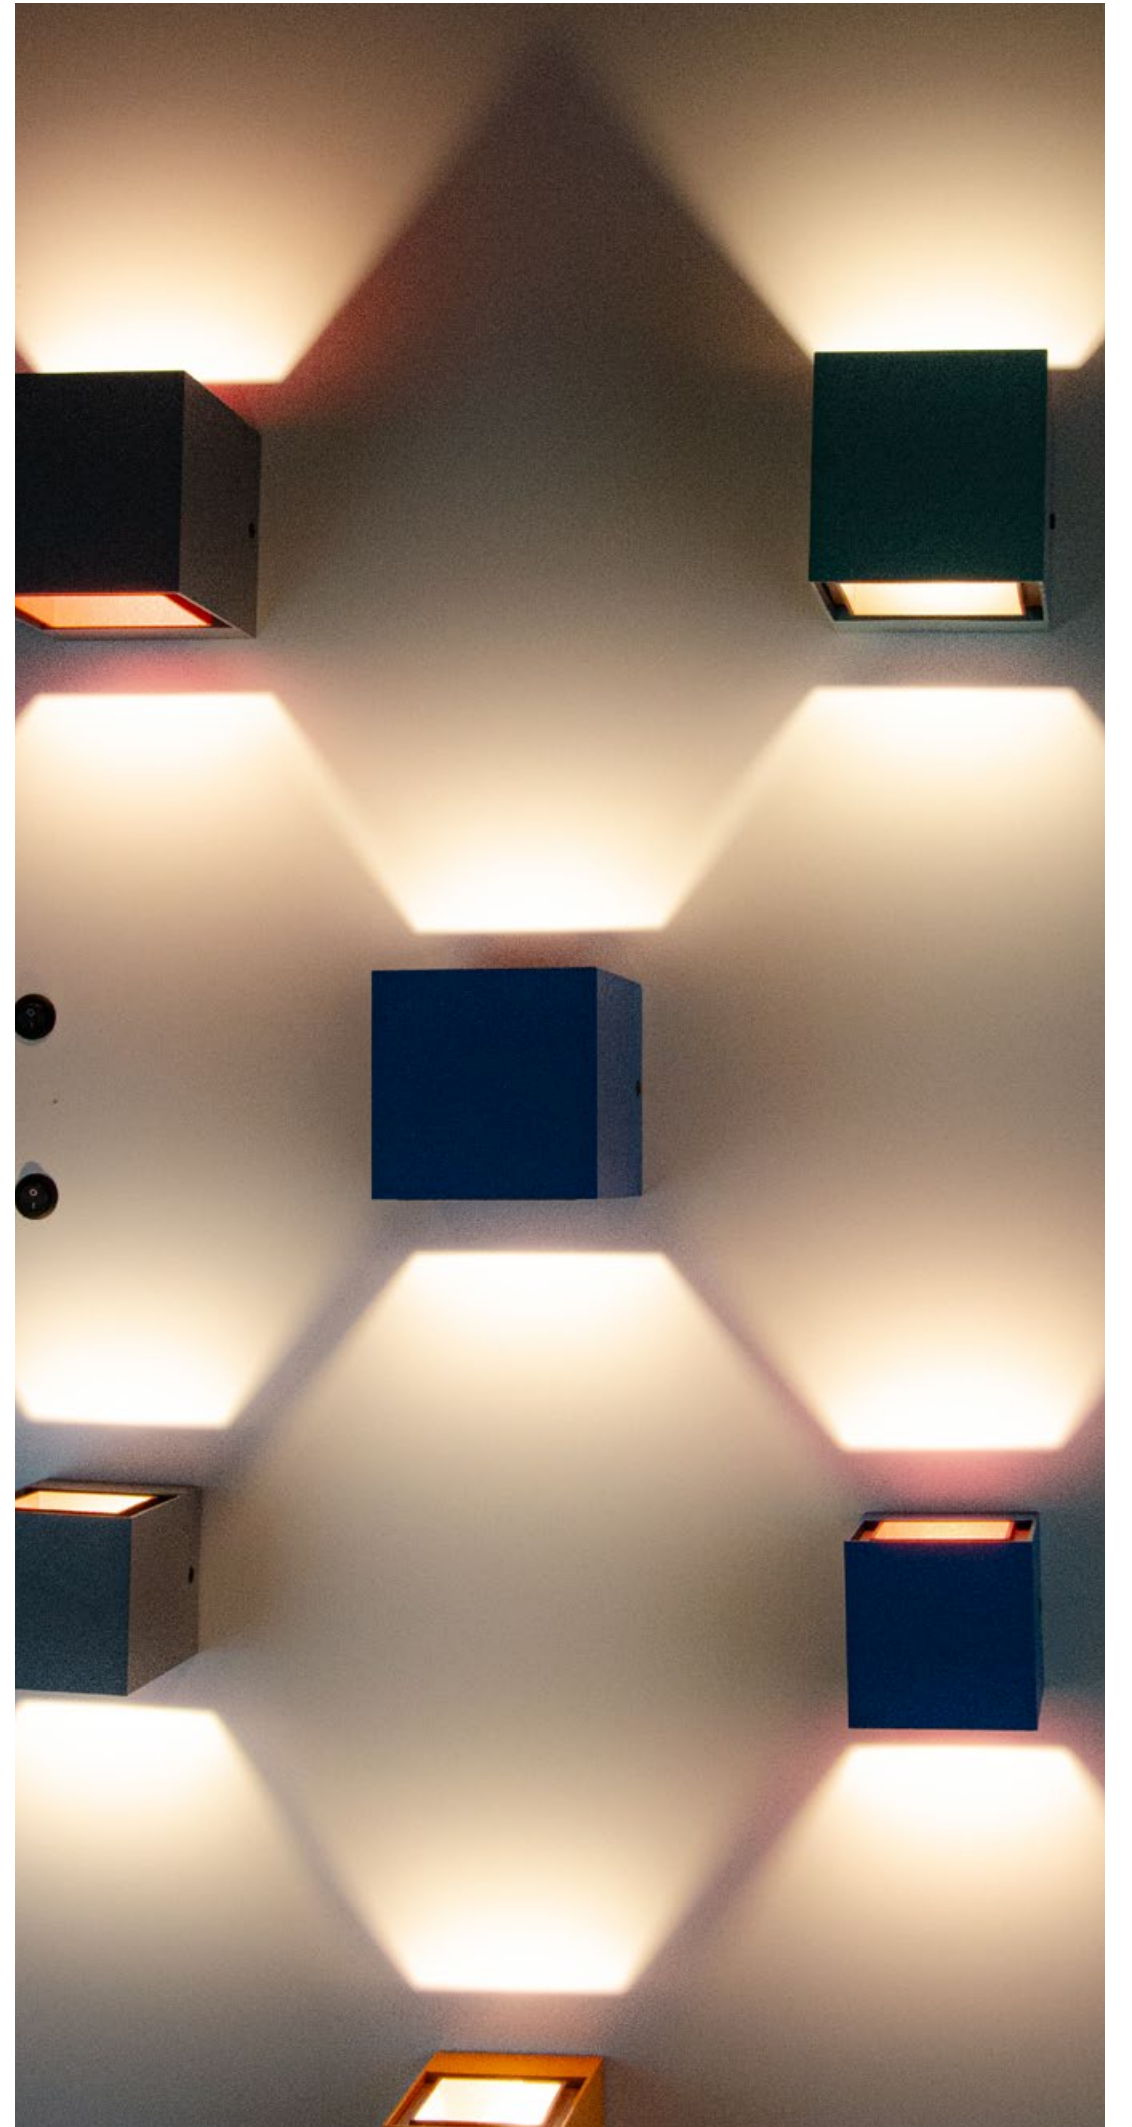



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Extrusion Body and aluminium injection heatsink

Body Color : Electrostatic Powder Coating

Led Types : Cob / Smd

Led : Epistar Cob / Samsung Cob / Osram Smd Smd

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:185mm W:125mm L:140mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led Tipleri : Cob / Smd

Led : Epistar Cob / Samsung Cob / Osram Smd Smd


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:185mm G:125mm U:140mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

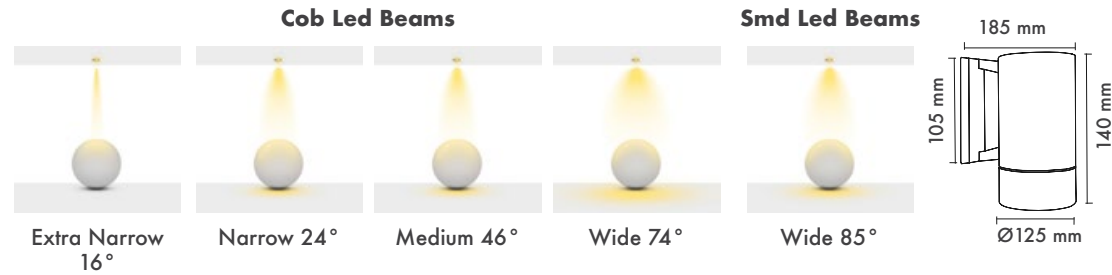

	2700K Lumen	3000K Lumen	4000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Osram Smd Led	-	1000 lm	1050 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Extrusion Body and aluminium injection heatsink

Body Color : Electrostatic Powder Coating

Led Types : Cob / Smd

Led : Epistar Cob / Samsung Cob / Osram Smd Smd

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:185mm W:125mm L:195mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led Tipleri : Cob / Smd

Led : Epistar Cob / Samsung Cob / Osram Smd Smd


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP54

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:185mm G:125mm U:195mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

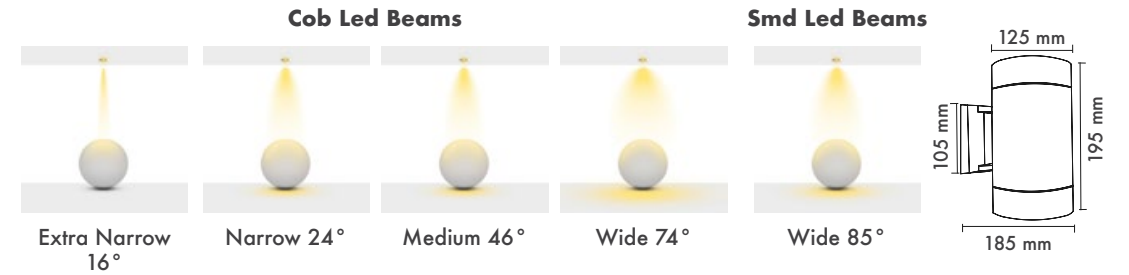

For One Side /Tek Taraftan İçin - X2	2700K Lumen	3000K Lumen	4000K Lumen	mA	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	180	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	250	10 Watt	>80
Samsung Cob Led	2200 lm	2300 lm	2400 lm	500	20 Watt	>80
Samsung Cob Led	3500 lm	3600 lm	3700 lm	700	30 Watt	>80
Osram Smd Led	-	1000 lm	1050 lm	350	10 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Selimo

Product Code: MS-55
Model No: 15500155



Optional On-Off Button
Opsiyonel Aç-Kapa Butonu

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Extrusion Body and End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise / Meanwell

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:40mm W:80mm

Montaj Tipi : Sıva Üstü

Gövde : Alüminyum Ekstrüzyon Gövde ve Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise / Meanwell

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:40mm G:80mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

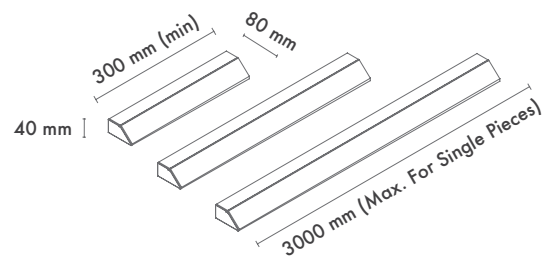

	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	3000mm	1	7644 lm	7894 lm	8144 lm	78 Watt	>82



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Unico Led Bar

Product Code: MSG 967
Model No: 15500967

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Extrusion Body

Diffuser Options : Opal Polycarbonate or Clear Diffuser

Led : Osram

Driver : Meanwell

Protection Type : IP20 / IP54

Dimming Options : Phase-Cut / 0-10 V / DALI

Profile Dimensions : H:8,5mm W:14,7mm

Montaj Tipi : Sıva Üstü

Gövde : Alüminyum Ekstrüzyon Gövde

Difüzör Çeşitler : Opal Polikarbon yada Renksiz Difüzör

Led : Osram


Sürücü : Meanwell

Koruma Sınıfı : IP20 / IP54

Dim Opsiyonları : Triak / 0-10 V / DALI

Profil Ölçüleri : Y:8,5mm G:14,7mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

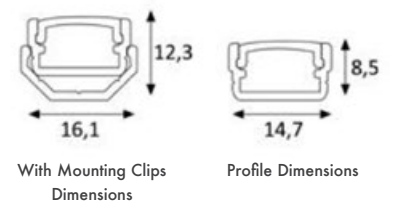

	2700K Lumen	3000K Lumen	4000K Lumen	Led No	1 Mt./Watt	CRI
Osram Smd Led	750 lm	800 lm	850 lm	60	6 Watt	>80
Osram Smd Led	1100 lm	1200 lm	1300 lm	60	10 Watt	>80
Osram Smd Led	1650 lm	1750 lm	1850 lm	60	15 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





X60 Strip Led

Product Code: MSG 750
Model No: 15500750



X60 Strip Led - IP68

Product Specification / Ürün Özellikleri

Led Brand : Samsung

Protection Type : IP20 / IP68

Voltage DC : 12 VDC

Led No/mt : 60

Led : Samsung

Koruma Sınıfı : IP20 / IP68

Voltaaj Sabit : 12 VDC

Led No/mt : 60

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt/mt	CRI
X60 STRIP LED IP20	1mt / 440 lm	1mt / 500 lm	1mt / 530 lm	400	4,8 Watt	>80
X60 STRIP LED IP20	1mt / 1145 lm	1mt / 1350 lm	1mt / 1400 lm	1200	14,4 Watt	>80
X60 STRIP LED IP68	1mt / 340 lm	1mt / 380 lm	1mt / 420 lm	400	4,8 Watt	>80
X60 STRIP LED IP68	1mt / 1035 lm	1mt / 1150 lm	1mt / 1240 lm	1200	14,4 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Vekal Kitchen

Product Code: MS-MUT 103
Model No: 15500103



Optional On-Off Button
Opsiyonel Aç-Kapa Butonu

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Frame

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating or Coated

Led : Osram / Edison Dob

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:90mm L: 180mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya veya Kaplama

Led : Osram / Edison Dob


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:75mm G:90mm U:180mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

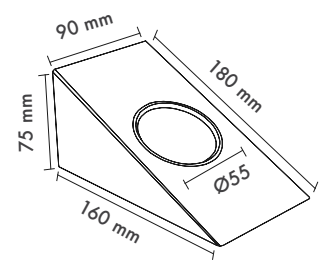

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	540 lm	570 lm	600 lm	6 Watt	>85
Edison Dob	375 lm	400 lm	475 lm	5 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Cabino Double Socket

Product Code: MS-MUT 102

Model No: 15500102

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Frame-
Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating or Coated

Led : Osram / Edison Dob

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:155mm L:
175mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve
Çerçeve

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya veya Kaplama

Led : Osram / Edison Dob


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:155mm U:175mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

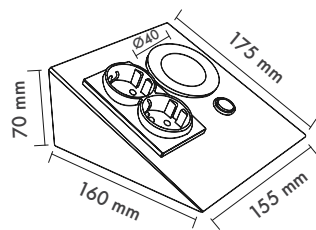

	Plug	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	2	540 lm	570 lm	600 lm	6 Watt	>85
Edison Dob	2	375 lm	400 lm	475 lm	5 Watt	>85

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550

Mirror Light V1

Product Code: MSAP-01

Model No: 15400001

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Extrusion Body

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Meanwell

Protection Type : IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Driver Box Dimension: H:33,50mm L: 195mm
W:57mm

Montaj Tipi : Sıva Üstü

Gövde : Alüminum Ekstrüzyon Gövde

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Meanwell

Koruma Sınıfı : IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Sürücü Kutusu Ölçüleri : Y:33,50mm U: 195mm
G:57mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

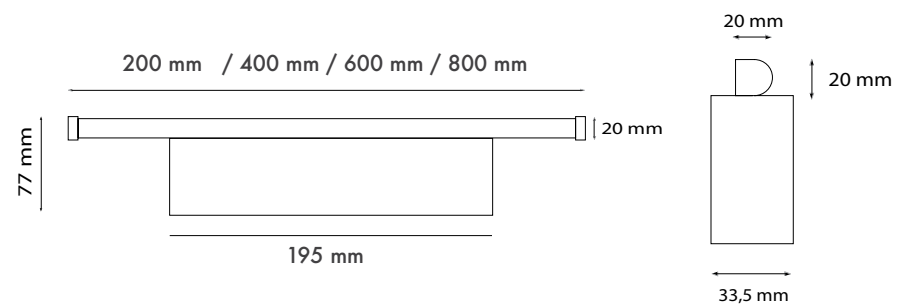

	Lenght	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0200mm	210 lm	240 lm	270 lm	3 Watt	>80
Osram	0400mm	450 lm	480 lm	510 lm	6 Watt	>80
Osram	0600mm	890 lm	720 lm	750 lm	9 Watt	>80
Osram	0800mm	930 lm	960 lm	990 lm	12 Watt	>80

Available Finishes
Uygulama RenkleriTextured White
Ral 9016Textured Grey
Ral 9006Textured Black
Ral 9005*For more page : 550
*Diğer renkler : 550



Mirror Light V2

Product Code: MSAP-02
Model No: 15400002

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Extrusion Body

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Meanwell

Protection Type : IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Driver Box Dimension: H:33,50mm L: 195mm
W:57mm

Montaj Tipi : Sıva Üstü

Gövde : Alüminum Ekstrüzyon Gövde

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Meanwell

Koruma Sınıfı : IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Sürücü Kutusu Ölçüleri : Y:33,5 mm U: 195mm
G:57mm

Beam Informations And Technicals / Teknik ve Açıl Bilgiler

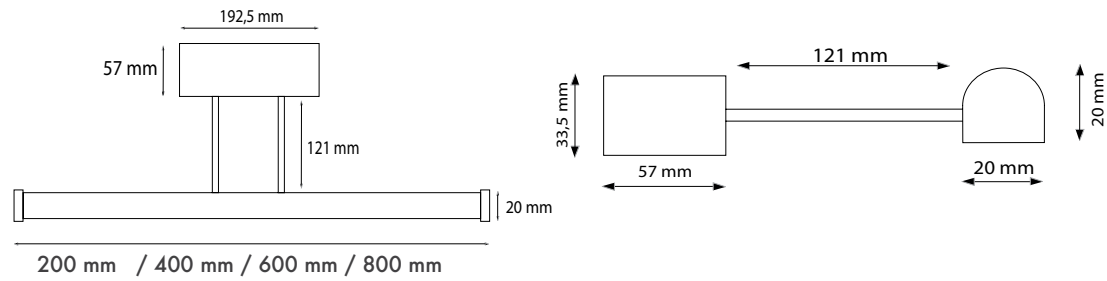

	Lenght	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0200mm	210 lm	240 lm	270 lm	3 Watt	>80
Osram	0400mm	450 lm	480 lm	510 lm	6 Watt	>80
Osram	0600mm	890 lm	720 lm	750 lm	9 Watt	>80
Osram	0800mm	930 lm	960 lm	990 lm	12 Watt	>80



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006


Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Step Light 01

Product Code: MSKG-001
Model No: 12600001

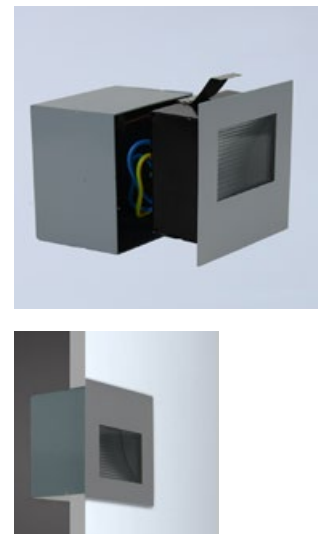

Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Metal Body

Diffuser Options : Clear PMMA

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Eaglerise

Protection Type : IP20 / IP44

Hole Size : 75mm x 75mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:56mm W:82mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Metal Gövde

Difüzör Çeşitler : Şeffaf PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Eaglerise

Koruma Sınıfı : IP20 / IP44

Delik Çapı : 75mm x 75mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:56mm G:82mm

Beam Informations And Technicals / Teknik ve Açıl Bilgiler

HOLE|DELİK
SIZE|ÇAPI
75x75
MM

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	80 lm	90 lm	100 lm	350	3 Watt	>80



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Product Specification / Ürün Özellikleri

Body : Aluminium Injection

Body Color : Electrostatic Powder Coating

Led : Cree

Driver : Eaglerise

Protection Type : IP20

Cut Out Size: 140mm x 55mm

Beam Options : 23°

Gövde : Alüminyum Enjeksiyon

Gövde Rengi : Elektrostatik Toz Boya

Led : Cree

Sürücü : Eaglerise

Koruma Sınıfı : IP20

Kesim Ölçüsü: 140mm x 55mm


Açı Seçenekleri : 23°

Beam Informations And Technicals / Teknik ve Açılal Bilgiler




23°

HOLE|DELİK
SIZE|ÇAPI
140x55
MM

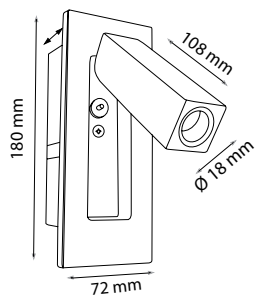

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Cree	127 lm	151 lm	164 lm	2 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550





Run 550 Up&Down
Product Code: MACK-56-2 0550
Model No: 16120550

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Extrusion Body

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP44

Battery Life: 1 or 3 Hours

Lux Value While Emergency On: %20 or %70

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:60mm W:510mm L:160mm

Montaj Tipi : Sıva Üstü

Gövde : Alüminyum Ekstrüzyon Gövde

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP44

Kit Süresi : 1 veya 3 Saat

Kit Devredeyken Lux Değeri : %20 veya %70

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:60mm G:510mm U:160mm




While Emergency Battery ON



While Emergency Battery OFF

Installation And Technicals / Teknik ve Montajlama Bilgileri

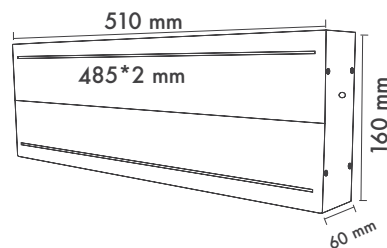

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	3136 lm	3386 lm	3636 lm	32 Watt	>82



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



Hena Bed Head
Product Code: MS 98
Model No: 16110098



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Body

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Meanwell / Eaglerise

Protection Type : IP40

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:90mm W:45mm

Montaj Tipi : Sıva Üstü

Gövde : Alüminyum Gövde

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Meanwell / Eaglerise

Koruma Sınıfı : IP40


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:90mm G:45mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

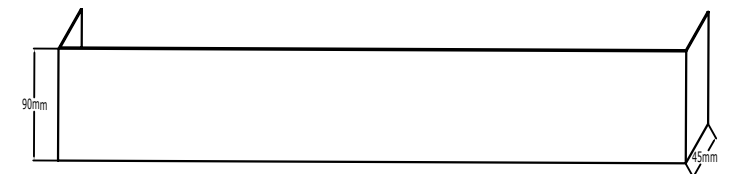

	Lenght	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	210 lm	240 lm	270 lm	15 Watt	>80
Osram	0900mm	450 lm	480 lm	510 lm	20 Watt	>80
Osram	1200mm	890 lm	720 lm	750 lm	30 Watt	>80
Osram	1500mm	930 lm	960 lm	990 lm	35 Watt	>80

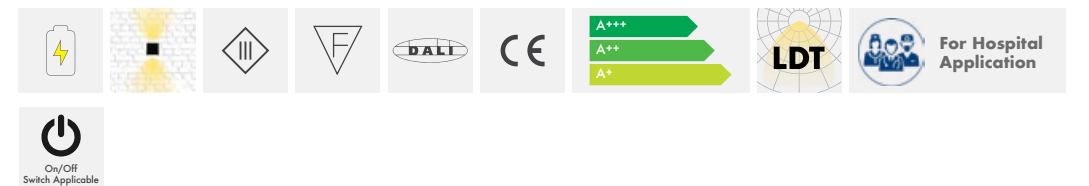

Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 550
*Diğer renkler : 550



INDOOR
OUTDOOR
PRIME
SEGMENT
EMERGENCY



The product outdoor (OUTDOOR) category provides the professional product types between an top quality and qualified performance.

- Project products proven by Metsan include high quality and long life time applied products
- Outstanding outdoor lighting model range to cover all applications and requirements
- Nominal life-time up to 100,000 h
- Focused on high efficiency and superior quality

BUNO BULKHEAD LIGHTING FAMILY

Designed for durability and performance, the Buno Bulkhead Family offers three distinct shapes, making it a versatile choice for outdoor and staircase walls. Crafted with a high-impact-resistant ABS body and UV-protected material, these fixtures are built to withstand harsh conditions while maintaining their appearance over time.

Ideal for both residential and commercial applications, Buno Bulkhead lights provide reliable illumination with a modern, robust design.

The best in its category with its socket LED card and 100,000+ lifetime driver. This product guide will help you to find what you're looking for by finding the range of Buno product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products



Buno V1
Bulkhead

P: 93



Buno V2
Bulkhead

P: 94



Buno V3
Bulkhead

P: 95



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : ABS Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA

Body Color : Light Grey

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP65 / IK10

Radar Sensor : Applicable

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:80mm Dia:260mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : ABS Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polistiren / Opal PMMA

Gövde Rengi : Açık Gri

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP65 / IK10

Radar Sensor : Uygulanabilir


Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : Y:80mm Çap:260mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Wide 120°

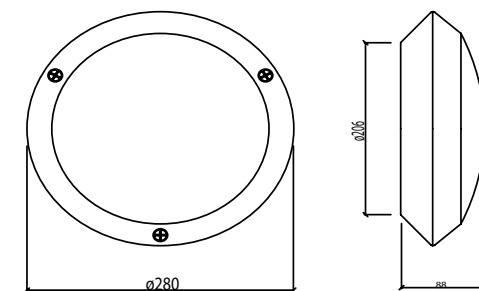

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	1760 lm	1840 lm	2000 lm	16 Watt	>85
Osram	2310 lm	2415 lm	2700 lm	21 Watt	>85





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : ABS Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA

Body Color : Light Grey

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP65 / IK10

Radar Sensor : Applicable

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:80mm Dia:260mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : ABS Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA

Gövde Rengi : Açık Gri

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP65 / IK10

Radar Sensor : Uygulanabilir


Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : Y:80mm Çap:260mm


Beam Informations And Technicals / Teknik ve Açısal Bilgiler



Wide 120°

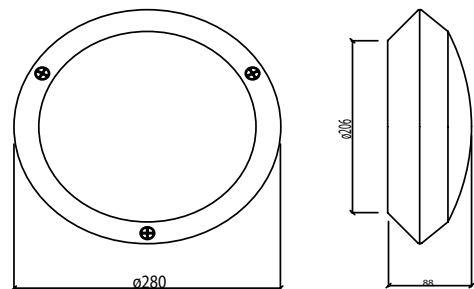

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	1760 lm	1840 lm	2000 lm	16 Watt	>85
Osram	2310 lm	2415 lm	2700 lm	21 Watt	>85

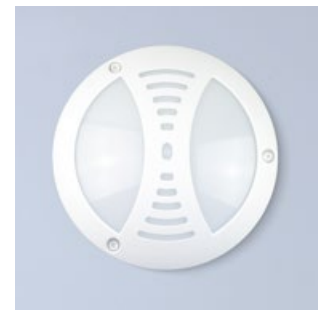

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : ABS Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA

Body Color : Light Grey

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP65 / IK10

Radar Sensor : Applicable

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:80mm Dia:260mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : ABS Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA

Gövde Rengi : Açık Gri

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP65 / IK10

Radar Sensor : Uygulanabilir


Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : Y:80mm Çap:260mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



Wide 120°

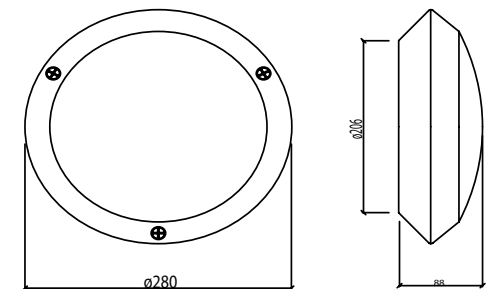

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	1760 lm	1840 lm	2000 lm	16 Watt	>85
Osram	2310 lm	2415 lm	2700 lm	21 Watt	>85



ATLANTIC FAMILY



Unique floodlight design rather than other types, invisible screws, adjustable head and available installation for both wall types (Vertical&Horizontal), Atlantic floodlights are best in its class.

High impact tempered glass with high reflective white reflector, aluminum injection frame and aluminum-injection body heatsink. The favored family group in the floodlight category in the floodlight area. The best in its category with its socket LED card and 100,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Atlantic product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Atlantic 50
Floodlight

P: 93



Atlantic 100
Floodlight

P: 94



Atlantic 150
Floodlight

P: 95



Atlantic 200
Floodlight

P: 96



Atlantic 300
Floodlight

P: 97

NEW



Atlantic 50

Product Code: MKPL-07 P050
Model No: 15000107



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Injection Case

Led : Samsung Led

Lens: PMMA UV Protected

Driver : Philips / Meanwell / Tridonic

Protection Type : IP66

Body Color : Electrostatic Powder Coating

Beam Options : 30° / 60° / 90°

Dimming Options : 1-10V / DALI

Screws : Stainless Steel

Product Dimensions : H:49mm W:216mm L:265mm

Class : Class 3 / III

Surge Protection : 5kV

Montaj Tipi : Sıva Üstü

Body : Alüminyum Enjeksiyon Kasa

Led : Samsung Led

Lens: PMMA UV Korumalı

Sürücü : Philips / Meanwell / Tridonic

Koruma Sınıfı : IP66

Gövde Rengi : Electrostatic Powder Coating

Açı Seçenekleri : 30° / 60° / 90°

Dim Opsiyonları : 1-10V / DALI


Vidalar : Paslanmaz Çelik

Ürün Ölçüleri: Y:49mm G:216mm U:265mm

Sınıf : Sınıf 3 / III

Aşırı Gerilim Koruması : 5kV

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler




30° / 60° / 90°

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI	Life Time
Samsung Led	2700 lm	2750 lm	2850 lm	20 Watt	>70	>100.00hrs
Samsung Led	4650 lm	4750 lm	4950 lm	35 Watt	>70	>100.00hrs
Samsung Led	6500 lm	6750 lm	7000 lm	50 Watt	>70	>100.00hrs



Technical Informations / Tekniksel Bilgiler

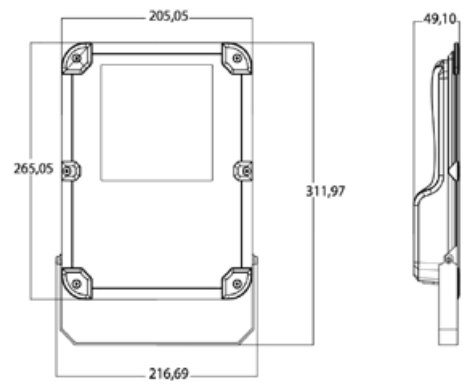

Standard Finish
Ürün Rengi

● Textured Black Ral 9005

Application Area / Uygulama Alanı



Atlantic 100

Product Code: MKPL-08 P100

Model No: 15000108



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Injection Case

Led : Samsung Led

Lens: PMMA UV Protected

Driver : Philips / Meanwell / Tridonic

Protection Type : IP66

Body Color : Electrostatic Powder Coating

Beam Options : 30° / 60° / 90°

Dimming Options : 1-10V / DALI

Screws : Stainless Steel

Product Dimensions : H:55mm W:342mm L:366mm

Class : Class 3 / III

Surge Protection : 5kV

Montaj Tipi : Sıva Üstü

Body : Alüminyum Enjeksiyon Kasa

Led : Samsung Led

Lens: PMMA UV Korumalı

Sürücü : Philips / Meanwell / Tridonic

Koruma Sınıfı : IP66

Gövde Rengi : Electrostatic Powder Coating

Açı Seçenekleri : 30° / 60° / 90°

Dim Opsiyonları : 1-10V / DALI


Vidalar : Paslanmaz Çelik

Ürün Ölçüleri: Y:55mm W:342mm L:366mm

Sınıf : Sınıf 3 / III

Aşırı Gerilim Koruması : 5kV

Beam Informations And Technicals / Teknik ve Açısız Bilgiler




30° / 60° / 90°

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI	Life Time
Samsung Led	13000 lm	13500 lm	14000 lm	100 Watt	>70	>100.00hrs



Technical Informations / Tekniksel Bilgiler

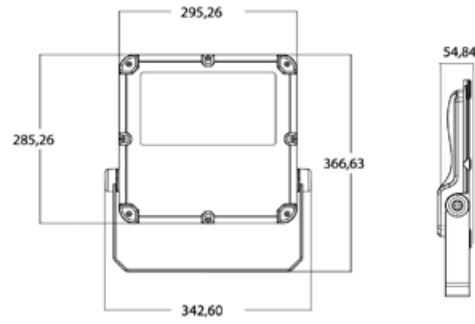

Standard Finish
Ürün Rengi

● Textured Black Ral 9005

Application Area / Uygulama Alanı



Atlantic 150

Product Code: MKPL-09 P150
Model No: 15000109



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Injection Case

Led : Samsung Led

Lens: PMMA UV Protected

Driver : Philips / Meanwell

Protection Type : IP66

Body Color : Electrostatic Powder Coating

Beam Options : 30° / 60° / 90°

Dimming Options : 1-10V / DALI

Screws : Stainless Steel

Product Dimensions : H:57mm W:393mm L:422mm

Class : Class 3 / III

Surge Protection : 5kV

Montaj Tipi : Sıva Üstü

Body : Alüminyum Enjeksiyon Kasa

Led : Samsung Led

Lens: PMMA UV Korumalı

Sürücü : Meanwell / Tridonic

Koruma Sınıfı : IP66

Gövde Rengi : Electrostatic Powder Coating

Açı Seçenekleri : 30° / 60° / 90°

Dim Opsiyonları : 1-10V / DALI

Vidalar : Paslanmaz Çelik

Ürün Ölçüleri: Y:57mm W:393mm L:422mm

Sınıf : Sınıf 3 / III

Aşırı Gerilim Koruması : 5kV

Beam Informations And Technicals / Teknik ve Açısal Bilgiler




30° / 60° / 90°

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI	Life Time
Samsung Led	19500 lm	20250 lm	21000 lm	150 Watt	>70	>100.00hrs



Technical Informations / Tekniksel Bilgiler

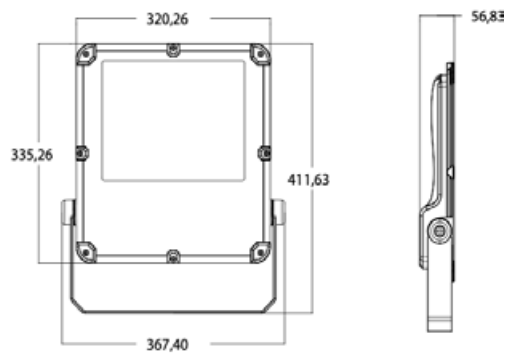

Standard Finish
Ürün Rengi

● Textured Black Ral 9005

Application Area / Uygulama Alanı



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Injection Case

Led : Samsung Led

Lens: PMMA UV Protected

Driver : Philips / Meanwell

Protection Type : IP66

Body Color : Electrostatic Powder Coating

Beam Options : 30° / 60° / 90°

Dimming Options : 1-10V / DALI

Screws : Stainless Steel

Product Dimensions : H:57mm W:393mm L:422mm

Class : Class 3 / III

Surge Protection : 5kV

Montaj Tipi : Sıva Üstü

Body : Alüminyum Enjeksiyon Kasa

Led : Samsung Led

Lens: PMMA UV Korumalı

Sürücü : Meanwell / Tridonic

Koruma Sınıfı : IP66

Gövde Rengi : Electrostatic Powder Coating

Açı Seçenekleri : 30° / 60° / 90°

Dim Opsiyonları : 1-10V / DALI

Vidalar : Paslanmaz Çelik

Ürün Ölçüleri: Y:57mm W:393mm L:422mm

Sınıf : Sınıf 3 / III

Aşırı Gerilim Koruması : 5kV

Beam Informations And Technicals / Teknik ve Açısal Bilgiler




30° / 60° / 90°

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI	Life Time
Samsung Led	26000 lm	27000 lm	28000 lm	200 Watt	>70	>100.00hrs



Technical Informations / Tekniksel Bilgiler

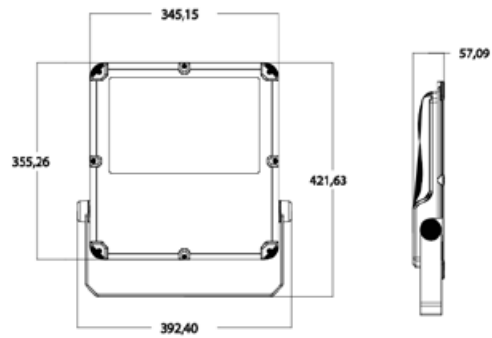

Standard Finish
Ürün Rengi

● Textured Black Ral 9005

Application Area / Uygulama Alanı



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Injection Case

Led : Samsung Led

Lens: PMMA UV Protected

Glass: Tempered Extra Clear Glass

Driver : Philips / Meanwell

Protection Type : IP66 / IK08

Body Color : Electrostatic Powder Coating

Beam Options : 30° / 60° / 90°

Dimming Options : 1-10V / DALI

Screws : Stainless Steel

Product Dimensions : H:67mm W:439mm L:483mm

Class : Class 3 / III

Surge Protection : 5kV

Montaj Tipi : Sıva Üstü

Body : Alüminyum Enjeksiyon Kasa

Led : Samsung Led

Lens: PMMA UV Korumalı

Cam: Temperli Ekstra Şeffaf Cam

Sürücü : Meanwell / Tridonic

Koruma Sınıfı : IP66 / IK08

Gövde Rengi : Electrostatic Powder Coating

Açı Seçenekleri : 30° / 60° / 90°

Dim Opsiyonları : 1-10V / DALI


Vidalar : Paslanmaz Çelik

Ürün Ölçüleri : Y:67mm G:439mm U:483mm

Sınıf : Sınıf 3 / III

Aşırı Gerilim Koruması : 5kV

Beam Informations And Technicals / Teknik ve Açısal Bilgiler




30° / 60° / 90°

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI	Life Time
Samsung Led	39000 lm	40500 lm	42000 lm	300 Watt	>70	>100.00hrs



Technical Informations / Tekniksel Bilgiler

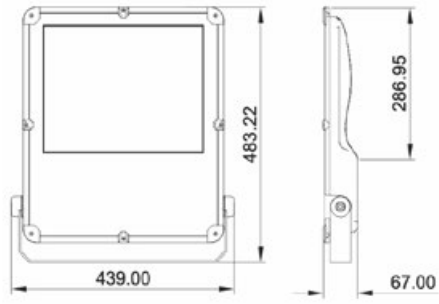

Standard Finish
Ürün Rengi

● Textured Black Ral 9005

Application Area / Uygulama Alanı





Unique street&road lighting design rather than other types, invisible screws, adjustable head.

High impact tempered glass with high reflective white reflector, aluminum injection frame and aluminum-injection body heatsink. The favored family group in the street&road lighting category on the road and streets. The best in its category with its socket LED card and 100,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Pedro product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Pedro 80
Road Lighting

P: 93



Pedro 120
Road Lighting

P: 94



Pedro 200
Road Lighting

P: 95



Pedro 80
Product Code: MKSL-11 P080
Model No: 15100111



Product Specification / Ürün Özellikleri

Installation Type : Pole Mounted

Suitable for mounting on side
Ø60mm or below.

Body : Aluminium Injection Case

Led : Samsung Led

Lens: PMMA UV Protected

Glass: Tempered Extra Clear Glass

Driver : Tridonic / Philips / Meanwell / Inventronic

Protection Type : IP66/ IK08

Body Color : Ral 7016 Electrostatic Powder Coating

Beam Options : Urban / Park / Street

Dimming Options : 1-10V / DALI

Screws : Stainless Steel

Product Dimensions : H:87mm W:200mm L:516mm

Class : Class 2 / II

Surge Protection : 5kV

Montaj Tipi : Direğe Monte

Ø60mm veya daha küçük çaplık boruya montaj edilebilir. Yandan montaja uygundur.

Body : Alüminyum Enjeksiyon Kasa

Led : Samsung Led

Lens: PMMA UV Korumalı

Cam: Temperli Ekstra Şeffaf Cam

Sürücü : Tridonic / Philips / Meanwell / Inventronic

Koruma Sınıfı : IP66 / IK08

Gövde Rengi : Ral 7016 Elektro Statik Toz Boya

Açı Seçenekleri : Sokak / Şehir / Park

Dim Opsiyonları : 1-10V / DALI


Vidalalar : Paslanmaz Çelik

Ürün Ölçüleri : Y:87mm G:200mm U:516mm

Sınıf : Sınıf 2 / II

Aşırı Gerilim Koruması : 5kV

Beam Informations And Technicals / Teknik ve Açılal Bilgiler




T1 / T2 / T3


	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI	Life Time
Samsung Led	3490 lm	3570 lm	3610 lm	30 Watt	>80	>100.00hrs
Samsung Led	5530 lm	5600 lm	5690 lm	50 Watt	>80	>100.00hrs
Samsung Led	8760 lm	8820 lm	8940 lm	80 Watt	>80	>100.00hrs



Technical Informations / Tekniksel Bilgiler

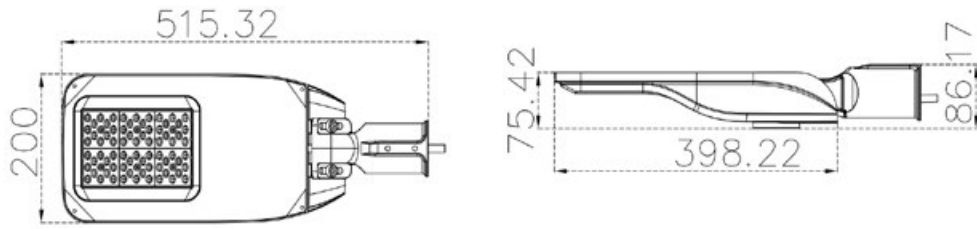

Adjustable Head / Ayarlanabilir

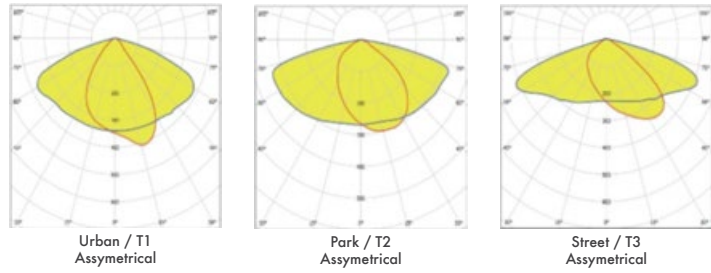

Standard Finish
Ürün Rengi

● Textured Grey Ral 9016



Pedro 120

Product Code: MKSL-12 P120

Model No: 15100112



Product Specification / Ürün Özellikleri

Installation Type : Pole Mounted

Suitable for mounting on side
Ø60mm or below.

Body : Aluminium Injection Case

Led : Samsung Led

Lens: PMMA UV Protected

Glass: Tempered Extra Clear Glass

Driver : Tridonic / Philips / Meanwell / Inventronic

Protection Type : IP66/ IK08

Body Color : Ral 7016 Electrostatic Powder Coating

Beam Options : Urban / Park / Street

Dimming Options : 1-10V / DALI

Screws : Stainless Steel

Product Dimensions : H:97mm W:228mm L:561mm

Class : Class 2 / II

Montaj Tipi : Direğe Monte

Ø60mm veya daha küçük çaplık boruya montaj
edilebilir. Yandan montaja uygundur.

Body : Alüminyum Enjeksiyon Kasa

Led : Samsung Led

Lens: PMMA UV Korumalı

Cam: Temperli Ekstra Şeffaf Cam

Sürücü : Tridonic / Philips / Meanwell / Inventronic

Koruma Sınıfı : IP66 / IK08

Gövde Rengi : Ral 7016 Elektro Statik Toz Boya

Açı Seçenekleri : Sokak / Şehir / Park


Dim Opsiyonları : 1-10V / DALI

Vidalalar : Paslanmaz Çelik

Ürün Ölçüleri : Y:97mm G:228mm U:561mm

Sınıf : Sınıf 2 / II

Beam Informations And Technicals / Teknik ve Açısal Bilgiler




T1 / T2 / T3

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI	Life Time
Samsung Led	9980 lm	10.210 lm	10.460 lm	90 Watt	>80	>100.00hrs
Samsung Led	10.990 lm	11.270 lm	11.610 lm	100 Watt	>80	>100.00hrs
Samsung Led	12.960 lm	13.240 lm	13.690 lm	120 Watt	>80	>100.00hrs



Technical Informations / Tekniksel Bilgiler

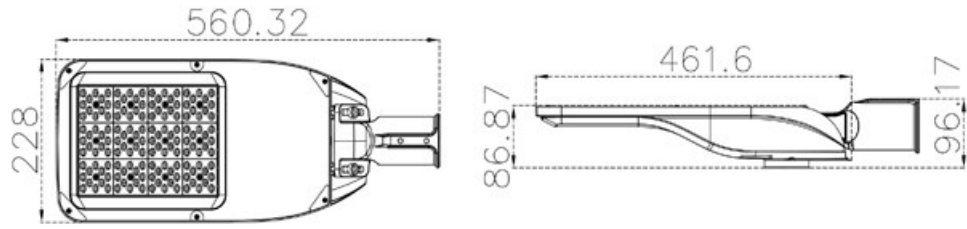

Adjustable Head / Ayarlanabilir






0°



15°



90°

Urban / T1
AssymetricalPark / T2
AssymetricalStreet / T3
AssymetricalStandard Finish
Ürün Rengi


Textured Grey Ral 9016



Product Specification / Ürün Özellikleri


Installation Type : Pole MountedSuitable for mounting on side
Ø60mm or below.**Body :** Aluminium Injection Case**Led :** Samsung Led**Lens:** PMMA UV Protected**Glass:** Tempered Extra Clear Glass**Driver :** Tridonic / Philips / Meanwell / Inventronic**Protection Type :** IP66 / IK08**Body Color :** Ral 7016 Electrostatic Powder Coating**Beam Options :** Urban / Park / Street**Dimming Options :** 1-10V / DALI**Screws :** Stainless Steel**Product Dimensions :** H:97mm W:279mm L:616mm**Class :** Class 2 / II**Montaj Tipi :** Direğe MonteØ60mm veya daha küçük çaplık boruya montaj
edilebilir. Yandan montaja uygundur.**Body :** Alüminyum Enjeksiyon Kasa**Led :** Samsung Led**Lens:** PMMA UV Korumalı**Cam:** Temperli Ekstra Şeffaf Cam**Sürücü :** Tridonic / Philips / Meanwell / Inventronic**Koruma Sınıfı :** IP66 / IK08**Gövde Rengi :** Ral 7016 Elektro Statik Toz Boya**Açı Seçenekleri :** Sokak / Şehir / Park**Dim Opsiyonları :** 1-10V / DALI**Vidalar :** Paslanmaz Çelik**Ürün Ölçüleri:** Y:97mm G:279mm U:616mm**Sınıf :** Sınıf 2 / II

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler




T1 / T2 / T3

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI	Life Time
Samsung Led	15.210 lm	15.480 lm	15.720 lm	140 Watt	>80	>100.00hrs
Samsung Led	16.050 lm	16.340 lm	16.650 lm	170 Watt	>80	>100.00hrs
Samsung Led	21.880 lm	22.140 lm	22.510 lm	200 Watt	>80	>100.00hrs



Technical Informations / Tekniksel Bilgiler

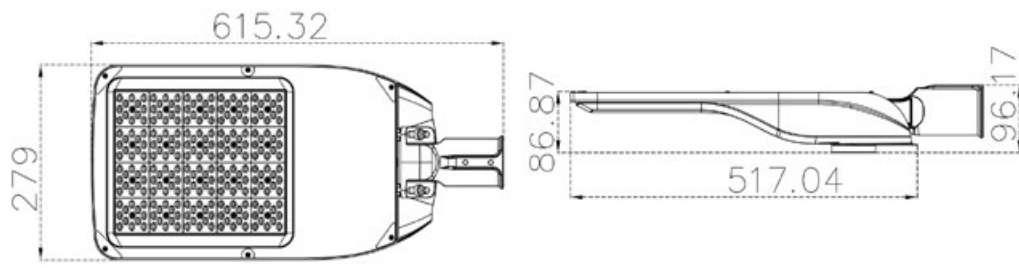


Adjustable Head / Ayarlanabilir



0°

15°


90°

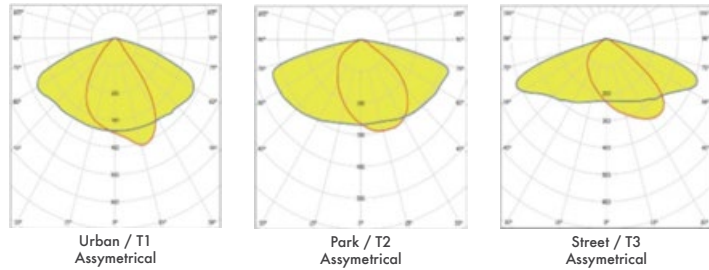Urban / T1
AssymetricalPark / T2
AssymetricalStreet / T3
AssymetricalStandard Finish
Ürün Rengi

● Textured Grey Ral 9016



Goba High-bay

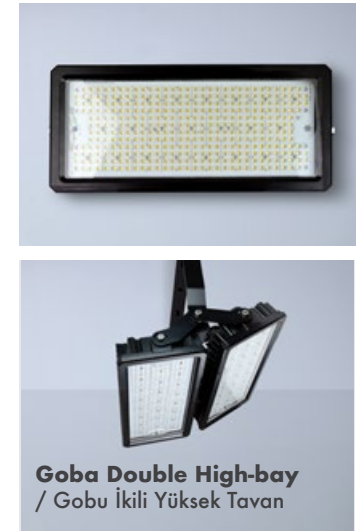Product Code: MHB-10 PXX
Model No: 14800010Goba Double High-bay
/ Gobu İkili Yüksek Tavan

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Heatsink : Aluminium Injection

Lens : PMMA Lens

Fixings : Stainless Steel

Body Color : Black RAL 9005

Led : Samsung

Driver : Tridonic / Philips / Inventronic / Meanwell

Protection Type : IP66 / IK09

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:330mm W:350mm
L:480mmDelivered ready to install, complete with factory fitted
integral gear tray, all supplied in a single carton.

Montaj Tipi : Sıva Üstü / Sarkıt

Soğutucu : Alüminyum Enjeksiyon

Lens : PMMA Lens

Bağlantılar : Paslanmaz Çelik

Kasa Rengi : Siyah RAL 9005

Led : Samsung

Sürücü : Tridonic / Philips / Inventronic / Meanwell

Koruma Sınıfı : IP65 / IK09


Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI



Ürün Ölçüleri : Y:140mm G:225mm U:480mm

Fabrikadan kurulumu hazır olarak teslim edilir, tüm
ürün tek bir kutu içinde teslim edilir.

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



30° / 60° / 90°

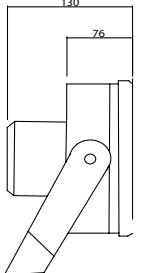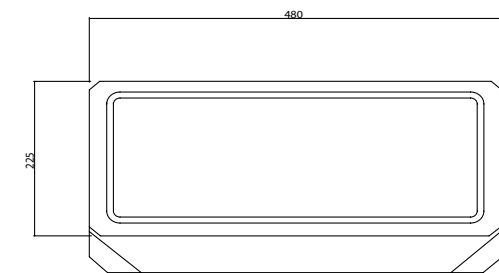

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	Kg	Lifetime
Samsung	42000 lm	43000 lm	44000 lm	320 Watt	8,2kg	>100 000 hrs
Samsung	52000 lm	53000 lm	54000 lm	400 Watt	8,4kg	>100 000 hrs





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Heatsink : Aluminium Injection

Lens : Polycarbonate Lens

Fixings : Stainless Steel

Heatsink Color : Black RAL 9005

Led : Samsung

Driver : Sosen / Lifud

Protection Type : IP65 / IK10

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:164mm D:285mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Sıva Üstü / Sarkıt

Soğutucu : Alüminyum Enjeksiyon

Lens : Polikarbon Lens

Bağlantılar : Paslanmaz Çelik

Soğutucu Rengi : Siyah RAL 9005

Led : Samsung

Sürücü : Sosen / Lifud

Koruma Sınıfı : IP65 / IK10


Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI


Ürün Ölçüleri : Y:164mm Çap:285mm

Fabrikadan kurulumu hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



60° / 90°



3000K Lumen **4000K Lumen** **6500K Lumen** **Watt** **Kg** **Lifetime**

Samsung	21.000 lm	21.750 lm	21.000 lm	150 Watt	2,2kg	>100 000 hrs
---------	-----------	-----------	-----------	----------	-------	--------------



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Heatsink : Aluminium Injection

Reflector : PMMA Reflector

Fixings : Stainless Steel

Heatsink Color : Light Grey RAL 9006

Led : Samsung

Driver : Tridonic / Philips / Inventronic / Meanwell

Protection Type : IP66 / IK09

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:330mm D:350mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Sıva Üstü / Sarkıt

Soğutucu : Alüminyum Enjeksiyon

Reflektör : PMMA Reflektör

Bağlantılar : Paslanmaz Çelik

Soğutucu Rengi : Açık Gri RAL 9006

Led : Samsung

Sürücü : Tridonic / Philips / Inventronic / Meanwell

Koruma Sınıfı : IP65 / IK09


Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : Y:330mm Çap:350mm

Fabrikadan kurulumu hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.


Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

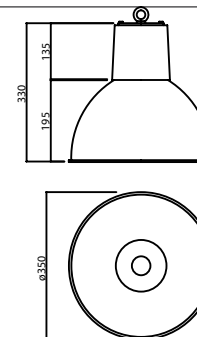

3000K Lumen **4000K Lumen** **6500K Lumen** **Watt** **Kg** **Lifetime**

Samsung	6800 lm	7000 lm	7400 lm	50 Watt	2,5kg	>100 000 hrs
Samsung	8150 lm	8400 lm	8800 lm	60 Watt	2,5kg	>100 000 hrs
Samsung	10800 lm	11200 lm	11700 lm	80 Watt	2,5kg	>100 000 hrs
Samsung	13500 lm	14000 lm	14600 lm	100 Watt	2,5kg	>100 000 hrs



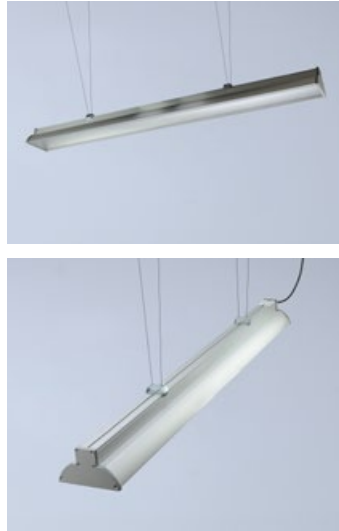

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Glass : 5 mm Thick Tempered Glass

Fixings : Stainless Steel

Body Color : Aluminium Grey

Led : Samsung

Driver : Tridonic / Philips / Inventronic / Meanwell

Protection Type : IP65 / IK08

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:78mm W:130mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Sıva Üstü / Sarkıt

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Soğutucu

Cam : 5 mm Kalınlıkta Temperli Cam

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Alüminyum Gri

Led : Samsung

Sürücü : Tridonic / Philips / Inventronic / Meanwell

Koruma Sınıfı : IP65 / IK08


Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : Y:78mm G:130mm


Fabrikadan kurulumu hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.


Beam Informations And Technicals / Teknik ve Açısal Bilgiler



Assymetric°

	Length	3000K Lumen	4000K Lumen	6500K Lumen	Watt	Lifetime
Samsung	605 mm	7850 lm	8000 lm	8200 lm	60 Watt	>100 000 hrs
Samsung	1210 mm	10470 lm	10670 lm	10940 lm	80 Watt	>100 000 hrs
Samsung	1210 mm	15700 lm	16000 lm	16410 lm	120 Watt	>100 000 hrs
Samsung	1210 mm	19625 lm	20000 lm	20515 lm	150 Watt	>100 000 hrs

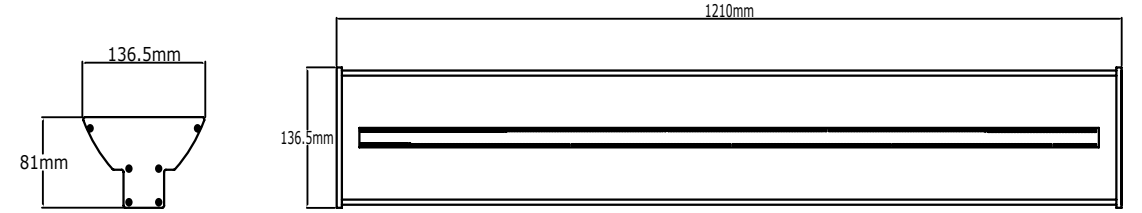

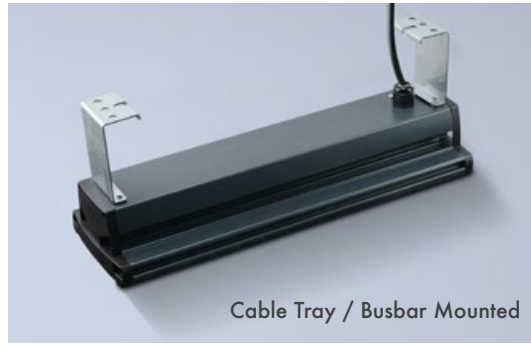

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted / Suspended / Busbar

Body and Heatsink : Aluminium Extrusion Body and Heatsink

End Cap : Black PMMA

Diffuser&Glass : PMMA Prismatic Diffuser / Clear 4mm Tempered Glass

Fixings : Stainless Steel

Body Color : Antrachite Grey RAL 7016

Led : Samsung

Driver : Tridonic / Philips / Inventronic / Meanwell

Protection Type : IP65 / IK08

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : W:140mm L:435mm H:75mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Sıva Üstü / Sarkit / Busbar

Body and Heatsink : Aluminium Extrusion Body and Heatsink

Sonlandırma Kapağı : Black PMMA

Difüzör&Cam : PMMA Prizmatik Difüzör / Şeffaf 4mm Temperli Cam

Bağlantılar : Paslanmaz Çelik

Kasa Rengi : Antrasit RAL 7016

Led : Samsung

Sürücü : Tridonic / Philips / Inventronic / Meanwell

Koruma Sınıfı : IP65 / IK08


Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : G:140mm U:435mm Y:75mm

Fabrikadan kurulumu hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.

Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler




90° (Prismatic Diffuser) /
110° (Clear Glass)


Clear Glass Lumen Information / Şeffaf Cam Lümen Bilgisi

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	Lifetime
Samsung	9120 lm	9300 lm	9480 lm	60 Watt	>100 000 hrs
Samsung	12.160 lm	12.400 lm	12.640 lm	80 Watt	>100 000 hrs
Samsung	18.240 lm	18.600 lm	18.960 lm	120 Watt	>100 000 hrs
Samsung	21.280 lm	21.700 lm	22.120 lm	140 Watt	>100 000 hrs
Samsung	24.320 lm	24.800 lm	25.280 lm	160 Watt	>100 000 hrs
Samsung	28.880 lm	29.450 lm	30.020 lm	190 Watt	>100 000 hrs

Prismatic Diffuser Lumen Information / Prizmatik Difüzör Lümen Bilgisi

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	Lifetime
Samsung	9120 lm	9300 lm	9480 lm	60 Watt	>100 000 hrs
Samsung	12.160 lm	12.400 lm	12.640 lm	80 Watt	>100 000 hrs
Samsung	18.240 lm	18.600 lm	18.960 lm	120 Watt	>100 000 hrs
Samsung	21.280 lm	21.700 lm	22.120 lm	140 Watt	>100 000 hrs
Samsung	24.320 lm	24.800 lm	25.280 lm	160 Watt	>100 000 hrs
Samsung	28.880 lm	29.450 lm	30.020 lm	190 Watt	>100 000 hrs

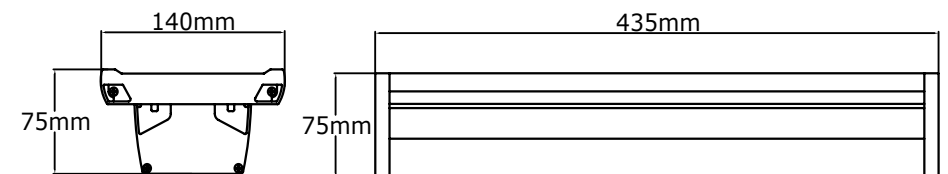

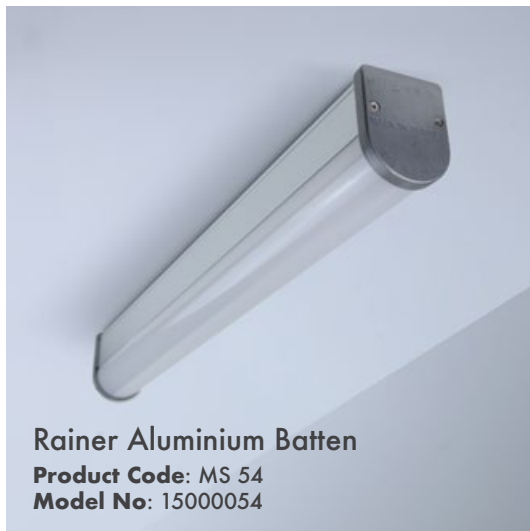

Rainer Aluminium Batten

Product Code: MS 54
Model No: 15000054



Rainer Polycarbon Batten

Product Code: MS 44
Model No: 15000044



Product Specification / Ürün Özellikleri

Installation Type : Surface / Suspendant / Busbar

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Diffuser Options : Opal Polycarbonate

Body Color : Anodized or Electrostatic Powder Coating

Led : Osram / Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP65 / IK10

Radar Sensor : Applicable

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:75mm W:62mm

Montaj Tipi : Sıva Üstü / Sarkıt / Busbar

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Eloksal veya Elektrostatik Toz Boya

Led : Osram / Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP65 / IK10

Radar Sensör : Uygulanabilir




Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri :Y:75mm G:62mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



Wide 130°

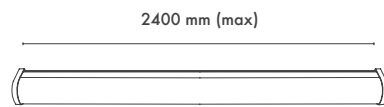

	Length	Line	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram / Samsung	0600mm	1	1850 lm	1950 lm	2100 lm	16 Watt	>80
Osram / Samsung	1200mm	1	3790 lm	3890 lm	4090 lm	32 Watt	>80
Osram / Samsung 6V	1200mm	1	5900 lm	6250 lm	6500 lm	52 Watt	>80
Osram / Samsung	0600mm	2	3790 lm	3890 lm	4090 lm	24 Watt	>80
Osram / Samsung	1200mm	2	5800 lm	6000 lm	6300 lm	46 Watt	>80



stepDIM

Product Specification / Ürün Özellikleri

Installation Type : Surface / Suspendant

Body and Heatsink : Polycarbon Extrusion Body and Aluminium Heatsink

Diffuser Options : Opal Polycarbonate

Body Color : Light Grey

Led : Osram / Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP65 / IK10

Radar Sensor : Applicable

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:mm W:mm

Montaj Tipi : Sıva Üstü / Sarkıt

Gövde ve Soğutucu : Polikarbon Ekstrüzyon Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Açık Gri

Led : Osram / Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP65 / IK10

Radar Sensör : Uygulanabilir


Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri :Y:mm G:mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



Wide 130°

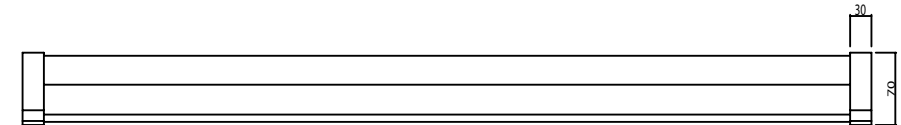

	Length	Line	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram / Samsung	0600mm	1	1850 lm	1950 lm	2100 lm	16 Watt	>80
Osram / Samsung	1200mm	1	3790 lm	3890 lm	4090 lm	32 Watt	>80
Osram / Samsung 6V	1200mm	1	5900 lm	6250 lm	6500 lm	52 Watt	>80
Osram / Samsung	0600mm	2	3790 lm	3890 lm	4090 lm	24 Watt	>80
Osram / Samsung	1200mm	2	5800 lm	6000 lm	6300 lm	46 Watt	>80



stepDIM



ExProof Polycarbon Batten

Product Code: MS 84
Model No: 1500084



Product Specification / Ürün Özellikleri

Installation Type : Surface

Body : Polycarbon Injection Body

Diffuser Options : UV Opal Polycarbonate

Body Color : Orange

Led : Osram / Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP65 / IK08

Scope : II3G Ex nR II C T6 Gc II
3D Ex tc IIIC T80 C Dc

Zone : 2-22

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:89mm W:122mm
L:1270mm

Montaj Tipi : Sıva Üstü

Gövde : Polikarbon Enjeksiyon Gövde

Difüzör Çeşitler : UV Opal Polikarbon

Gövde Rengi : Turuncu

Led : Osram / Samsung

Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP65 / IK08

Kapsam : II3G Ex nR II C T6 Gc II
3D Ex tc IIIC T80 C Dc

Zone : 2-22



Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : Y:89mm G:122mm U:1270mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Wide 130°



	Length	Line	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram / Samsung	1270mm	2	4400 lm	4500 lm	4650 lm	40 Watt	>80
Osram / Samsung	1270mm	2	6400 lm	6500 lm	6650 lm	60 Watt	>80



Wavela

Product Code: MTS WALL XXX
Model No: 15700001



Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body : Aluminium Extrusion Body

Lens : PMMA

Fixings : Stainless Steel

Body Color : Light Grey RAL 9006 - Umbra Grey RAL 7022 - Anthracite Grey RAL 7016 - Black RAL 9005

Led : Cree Power Led

Driver : Tridonic / Philips / Inventronic / Meanwell

Protection Type : IP66 / IK09

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:180mm W:56mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Surface Mounted

Gövde : Alüminyum Ekstrüzyon Gövde

Lens : PMMA

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Açık Gri RAL 9006 - Umbra Gri RAL 7022 - Antrasit Gri RAL 7016 - Siyah RAL 9005

Led : Cree Power Led

Sürücü : Tridonic / Philips / Inventronic / Meanwell

Koruma Sınıfı : IP66 / IK09

Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI



Ürün Ölçüleri : Y:180mm G:56mm

Fabrikadan kurulumu hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Available Beam Options

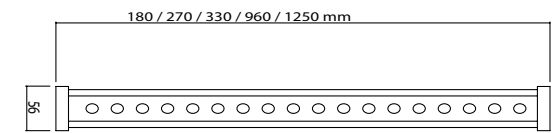

	Length	3000K Lumen	4000K Lumen	R-G-B	Watt	Lifetime
Cree Power Led	180mm	1250 lm	1350 lm	-	10 Watt	>100 000 hrs
Cree Power Led	270mm	1850 lm	1950 lm	-	15 Watt	>100 000 hrs
Cree Power Led	330mm	2500 lm	2700 lm	-	20 Watt	>100 000 hrs
Cree Power Led	960mm	7500 lm	8100 lm	-	60 Watt	>100 000 hrs
Cree Power Led	1250mm	9300 lm	10000 lm	-	75 Watt	>100 000 hrs





Product Specification / Ürün Özellikleri

Installation Type : Grass Mounted / Surface Mounted / Tree Mounted

Body : Aluminium Injection Body

Lens : PMMA

Glass : Clear Tempered 4mm

Fixings : Stainless Steel

Body Color : Light Grey RAL 9006 - Umbra Grey RAL 7022 - Anthracite Grey RAL 7016 - Black RAL 9005

Led : Cree Power Led

Driver : Tridonic / Philips / Inventronic / Meanwell

Protection Type : IP67 / IK08

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:330mm W:100mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Çime Monte / Sıva Üstü / Ağaca Monte

Gövde : Alüminyum Enjeksiyon Gövde

Lens : PMMA

Cam : Şeffaf Temperli 4mm

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Açık Gri RAL 9006 - Umbra Gri RAL 7022 - Antrasit Gri RAL 7016 - Siyah RAL 9005

Led : Cree Power Led

Sürücü : Tridonic / Philips / Inventronic / Meanwell

Koruma Sınıfı : IP67 / IK08

Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI


Ürün Ölçüleri : Y:330mm G:100mm

Fabrikadan kuruluma hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



30° / 60° / 90°

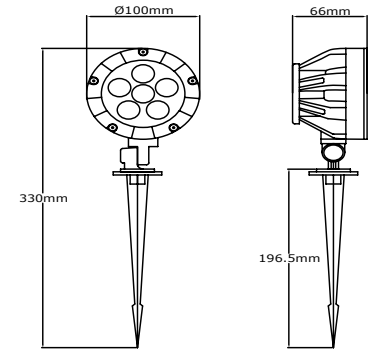

	2700K Lumen	3000K Lumen	4000K Lumen	Watt	Lifetime
Cree Power Led	950 lm	970 lm	990 lm	8 Watt	>60 000 hrs
Cree Power Led	1425 lm	1455 lm	1485 lm	12 Watt	>60 000 hrs
Cree Power Led	1782 lm	1819 lm	1857 lm	15 Watt	>60 000 hrs





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium extrusion body and aluminium heatsink

Glass : Clear Tempered 5mm

Fixings : Stainless Steel

Body Color : Electrostatic Powder Coating

Led Brands : Samsung

Driver : Tridonic / Philips / Eaglerise

Beam Options : 28° / 40°

Protection Type : IP65 / IK08

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:150mm W:90mm L:160mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum ekstrüzyon gövde ve alüminyum soğutucu

Cam : Şeffaf Temperli 5mm

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Elektrostatik Toz Boya

Led Markaları : Samsung

Sürücü : Tridonic / Philips / Eaglerise

Açı Seçenekleri : 28° / 40°

Koruma Sınıfı : IP65 / IK08

Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : Y:150mm G:90mm U:160mm


Fabrikadan kurulumu hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.

Beam Informations And Technicals / Teknik ve Açısal Bilgiler




Narrow 28°

Medium 40°



	2700K Lumen	3000K Lumen	400K Lumen	Watt	CRI
Samsung Cob Led	710 lm	770 lm	830 lm	7 Watt	>80
Samsung Cob Led	1010 lm	1070 lm	1130 lm	10 Watt	>80
Samsung Cob Led	1222 lm	1261 lm	1313 lm	13 Watt	>80

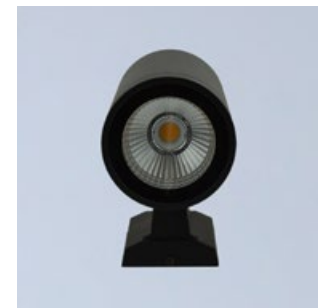

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : Aluminium extrusion body and aluminium heatsink

Glass : Clear Tempered 5mm

Fixings : Stainless Steel

Body Color : Electrostatic Powder Coating

Led Brands : Samsung

Driver : Tridonic / Philips / Eaglerise

Beam Options : 28° / 40°

Protection Type : IP65 / IK08

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:212mm W:100mm L:160mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum ekstrüzyon gövde ve alüminyum soğutucu

Cam : Şeffaf Temperli 5mm

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Elektrostatik Toz Boya

Led Markaları : Samsung

Sürücü : Tridonic / Philips / Eaglerise

Açı Seçenekleri : 28° / 40°

Koruma Sınıfı : IP65 / IK08

Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : Y:212mm G:100mm U:160mm


Fabrikadan kurulumu hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.

Beam Informations And Technicals / Teknik ve Açısal Bilgiler



Narrow 28°

Medium 40°

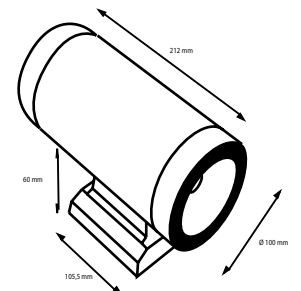

	2700K Lumen	3000K Lumen	400K Lumen	Watt	CRI
Samsung Cob Led	1420 lm	1440 lm	1660 lm	14 Watt	>80
Samsung Cob Led	2020 lm	2140 lm	2260 lm	20 Watt	>80
Samsung Cob Led	2444 lm	2522 lm	2626 lm	26 Watt	>80



IMPACT IN-GROUND FAMILY



Stainless steel front frame with inox screws, impact family is well protected against to harsh conditions.

High impact tempered glass with UV protected lensed, stainless steel frame and aluminum-injection body heatsink. The favored family group in the in-ground lighting category for many purposes. The best in its category with its socket LED card and 50,000+ lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Impact in-ground product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.



Impact Mini In-Ground
In-Ground Lights

P: 93



Impact Midi In-Ground
In-Ground Lights

P: 94



Impact Maxi In-Ground
In-Ground Lights

P: 95



Product Specification / Ürün Özellikleri

Installation Type : In-Ground Mounted

Body : Aluminium Injection Body

Bezel : Stainless Steel

Lens : PMMA

Glass : Clear Tempered 4mm

Fixings : Stainless Steel

Body Color : Natural Stainless Steel

Led : Cree Power Led

Driver : Tridonic / Philips / Inventronic / Meanwell

Protection Type : IP67 / IK10

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:91.50mm W:94mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Zemine Gömme

Gövde : Alüminyum Enjeksiyon Gövde

Çerçeve : Paslanmaz Çelik

Lens : PMMA

Cam : Şeffaf Temperli 4mm

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Natürel Paslanmaz Çelik

Led : Cree Power Led

Sürücü : Tridonic / Philips / Inventronic / Meanwell

Koruma Sınıfı : IP67 / IK10




Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : Y:91.50mm G:94mm

Fabrikadan kuruluma hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

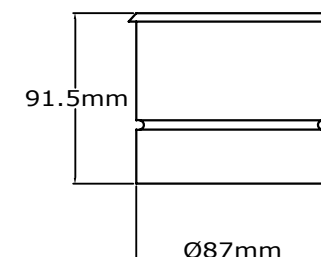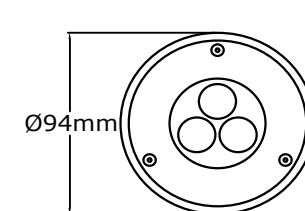

	2700K Lumen	3000K Lumen	4000K Lumen	R-G-B	Watt	Lifetime
Cree Power Led	290 lm	300 lm	310 lm	-	3 Watt	>50.000 hrs
Cree Power Led	590 lm	600 lm	610 lm	-	6 Watt	>50.000 hrs



**Product Specification / Ürün Özellikleri****Installation Type :** In-Ground Mounted**Body :** Aluminium Injection Body**Bezel :** Stainless Steel**Lens :** PMMA**Glass :** Clear Tempered 4mm**Fixings :** Stainless Steel**Body Color :** Natural Stainless Steel**Led :** Cree Power Led**Driver :** Tridonic / Philips / Inventronic / Meanwell**Protection Type :** IP67 / IK10**Ambient Temperature :** - 30°C / 50°C**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:116.50mm W:115mm


Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Zemine Gömme**Gövde :** Alüminyum Enjeksiyon Gövde**Çerçeve :** Paslanmaz Çelik**Lens :** PMMA**Cam :** Şeffaf Temperli 4mm**Bağlantılar :** Paslanmaz Çelik**Gövde Rengi :** Natürel Paslanmaz Çelik**Led :** Cree Power Led**Sürücü :** Tridonic / Philips / Inventronic / Meanwell**Koruma Sınıfı :** IP67 / IK10**Ortam Sıcaklığı :** - 30°C / 50°C**Dim Opsiyonları :** Phase-Cut / 1-10 V / DALI**Ürün Ölçüleri :** Y:116.50mm G:115mm

Fabrikadan kuruluma hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler


HOLE/DELİK
SIZE/ÇAPI
108
MM

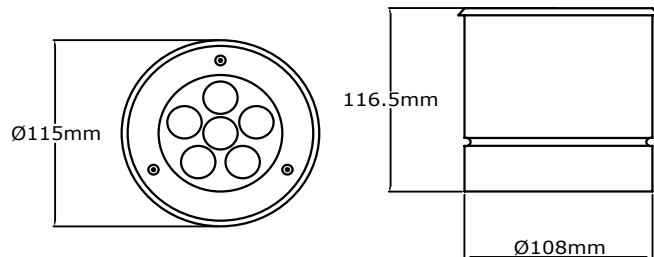**Product Specification / Ürün Özellikleri****Installation Type :** In-Ground Mounted**Body :** Aluminium Injection Body**Bezel :** Stainless Steel**Lens :** PMMA**Glass :** Clear Tempered 4mm**Fixings :** Stainless Steel**Body Color :** Natural Stainless Steel**Led :** Cree Power Led**Driver :** Tridonic / Philips / Inventronic / Meanwell**Protection Type :** IP67 / IK10**Ambient Temperature :** - 30°C / 50°C**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:119.50mm W:150mm


Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Zemine Gömme**Gövde :** Alüminyum Enjeksiyon Gövde**Çerçeve :** Paslanmaz Çelik**Lens :** PMMA**Cam :** Şeffaf Temperli 4mm**Bağlantılar :** Paslanmaz Çelik**Gövde Rengi :** Natürel Paslanmaz Çelik**Led :** Cree Power Led**Sürücü :** Tridonic / Philips / Inventronic / Meanwell**Koruma Sınıfı :** IP67 / IK10**Ortam Sıcaklığı :** - 30°C / 50°C**Dim Opsiyonları :** Phase-Cut / 1-10 V / DALI**Ürün Ölçüleri :** Y:119.50mm G:150mm

Fabrikadan kuruluma hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

HOLE/DELİK
SIZE/ÇAPI
138
MM

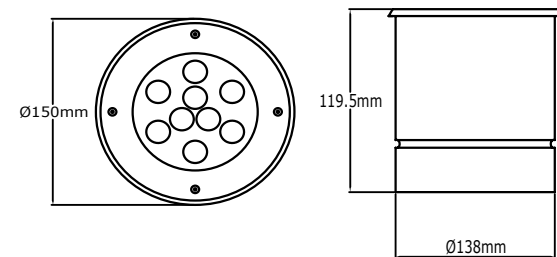

2700K Lumen 3000K Lumen 4000K Lumen R-G-B Watt Lifetime

Cree Power Led	590 lm	600 lm	610 lm	-	6 Watt	>50.000 hrs
Cree Power Led	1080 lm	1200 lm	1220 lm	-	12 Watt	>50.000 hrs



2700K Lumen 3000K Lumen 4000K Lumen R-G-B Watt Lifetime

Cree Power Led	885 lm	910 lm	985 lm	-	9 Watt	>50.000 hrs
Cree Power Led	1770 lm	1820 lm	1970 lm	-	18 Watt	>50.000 hrs





Product Specification / Ürün Özellikleri

Installation Type : In-Ground Mounted

Body : Aluminium Injection Frame

Lens : PMMA

Fixings : Stainless Steel

Body Color : Light Grey RAL 9006 - Umbra Grey RAL 7022 - Anthracite Grey RAL 7016 - Black RAL 9005

Led : Cree Power Led

Driver : Tridonic / Philips / Inventronic / Meanwell

Protection Type : IP67 / IK10

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:70mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Zemine Gömme

Gövde : Alüminyum Enjeksiyon Gövde

Lens : PMMA

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Açık Gri RAL 9006 - Umbra Gri RAL 7022 - Antrasit Gri RAL 7016 - Siyah RAL 9005

Led : Cree Power Led

Sürücü : Tridonic / Philips / Inventronic / Meanwell

Koruma Sınıfı : IP67 / IK10

Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI



Ürün Ölçüleri : Y:70mm G:70mm

Fabrikadan kurulumu hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.




Beam Informations And Technicals / Teknik ve Açısal Bilgiler



30°



	2700K Lumen	3000K Lumen	4000K Lumen	Watt	Lifetime
Cree Power Led	83 lm	90 lm	97 lm	1 Watt	>60 000 hrs
Cree Power Led	166 lm	180 lm	194 lm	2 Watt	>60 000 hrs

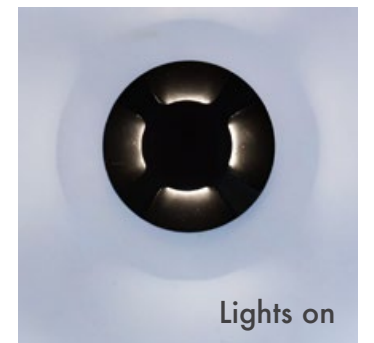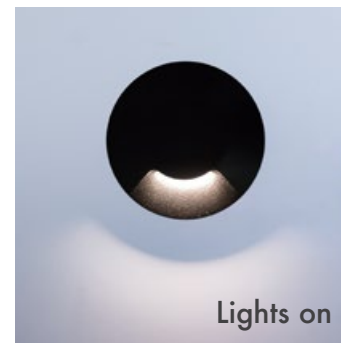



Product Specification / Ürün Özellikleri

Installation Type : In-Ground Mounted

Body : Aluminium Injection Body and Frame

Diffuser : PMMA 5mm

Fixings : Stainless Steel

Body Color : Light Grey RAL 9006 - Umbra Grey RAL 7022 - Anthracite Grey RAL 7016 - Black RAL 9005

Led : Samsung

Driver : Tridonic / Philips / Inventronic / Meanwell

Protection Type : IP67 / IK10

Ambient Temperature : - 30°C / 50°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : FH:16mm H:90mm W:70mm

Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Montaj Tipi : Zemine Gömme

Gövde : Alüminyum Enjeksiyon Gövde ve Çerçeve

Difüzör : PMMA 5mm

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Açık Gri RAL 9006 - Umbra Gri RAL 7022 - Antrasit Gri RAL 7016 - Siyah RAL 9005

Led : Samsung

Sürücü : Tridonic / Philips / Inventronic / Meanwell

Koruma Sınıfı : IP67 / IK10

Ortam Sıcaklığı : - 30°C / 50°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Ürün Ölçüleri : CY:16mm Y:90mm G:70mm



Fabrikadan kurulumu hazır olarak teslim edilir, tüm ürün tek bir kutu içinde teslim edilir.




Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



110°



Mounting Pipe



2700K Lumen 3000K Lumen 4000K Lumen Watt Lifetime

	2700K Lumen	3000K Lumen	4000K Lumen	Watt	Lifetime
Samsung	175 lm	180 lm	185 lm	2 Watt	>60 000 hrs



ENZA OUTDOOR BOLLARD FAMILY



Enhance your outdoor spaces with the Enza Bollard Family, combining style and functionality in a sleek, modern design.

Crafted from high-quality aluminum extrusion with a durable electrostatic paint finish, these bollard lights ensure longlasting performance in outdoor environments.

With various design options available, the Enza Bollard Family is a versatile choice for walkways, gardens, and public spaces, providing both aesthetic appeal and reliable illumination.

This product guide will help you to find what you're looking for by finding the range of Enza products.



Enza Gu-10 Bulb Bollards

Enza Gu-10 Bulb Bollards



Enza L Single
Bollard Lights

P: 93



Enza T Double
Bollard Lights

P: 94



Enza V Double
Bollard Lights

P: 95



Enza U
Bollard Lights

P: 95



Product Name: Enza L Single
Product Code: MB-027 XXXX
Model No: 16500027

Product Specification / Ürün Özellikleri

Installation Type : Ground Mounted

Body : Aluminium

Fixings : Stainless Steel

Body Color : Anthracite Grey RAL 7016 - Umbra Grey RAL 7022 - Black RAL 9005

Led : Samsung

Driver : Tridonic / Philips / Eaglerise / Meanwell

Protection Type : IP65 / IK08

Ambient Temperature : - 30°C / 60°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Delivered ready to install.

Montaj Tipi : Ground Mounted

Gövde: Alüminyum

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Antrasit Gri RAL 7016 - Umbra Gri RAL 7022 - Siyah RAL 9005

Led : Samsung

Sürücü : Tridonic / Philips / Eaglerise / Meanwell

Koruma Sınıfı : IP65 / IK08


Ortam Sıcaklığı : - 30°C / 60°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Fabrikadan kurulumu hazır olarak teslim edilir.



Beam Informations And Technicals / Teknik ve Açılabilir Bilgiler

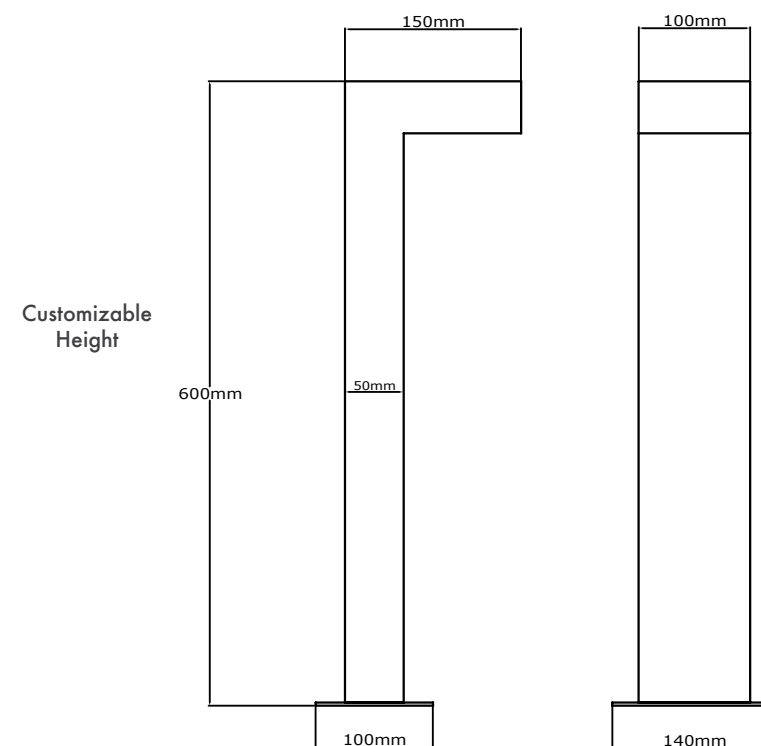

60° / Asymmetric

	3000K Lumen	4000K Lumen	6500K Lumen	Watt
Samsung Led	900 lm	925 lm	950 lm	10 Watt



Available Finishes
Uygulama Renkleri

● Textured White Ral 9016 ● Textured Black Ral 9005 ● Textured Grey Ral 9006



Product Name: Enza L Double
Product Code: MB-028 XXXX
Model No: 16500028

Product Specification / Ürün Özellikleri

Installation Type : Ground Mounted

Body : Aluminium

Fixings : Stainless Steel

Body Color : Anthracite Grey RAL 7016 - Umbra Grey RAL 7022 - Black RAL 9005

Led : Samsung

Driver : Tridonic / Philips / Eaglerise / Meanwell

Protection Type : IP65 / IK08

Ambient Temperature : - 30°C / 60°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Delivered ready to install.

Montaj Tipi : Ground Mounted

Gövde: Alüminyum

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Antrasit Gri RAL 7016 - Umbra Gri RAL 7022 - Siyah RAL 9005

Led : Samsung

Sürücü : Tridonic / Philips / Eaglerise / Meanwell

Koruma Sınıfı : IP65 / IK08


Ortam Sıcaklığı : - 30°C / 60°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Fabrikadan kurulumu hazır olarak teslim edilir.



Beam Informations And Technicals / Teknik ve Açısal Bilgiler

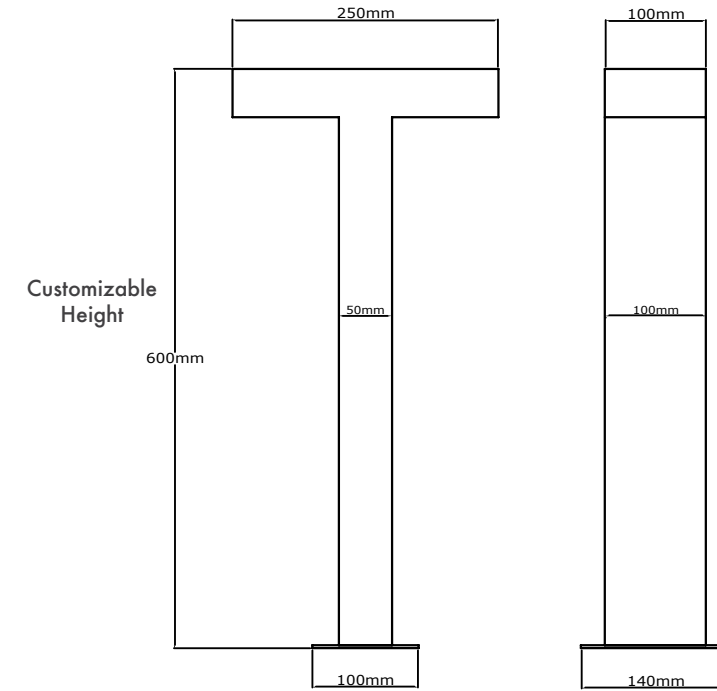

60° / Asymmetric

	3000K Lumen	4000K Lumen	6500K Lumen	Watt
Samsung Led	1800 lm	1850 lm	1900 lm	20 Watt



Available Finishes
Uygulama Renkleri

● Textured White Ral 9016 ● Textured Black Ral 9005 ● Textured Grey Ral 9006



Product Name: Enza V Double
Product Code: MB-030 XXXX
Model No: 16500030

Product Specification / Ürün Özellikleri

Installation Type : Ground Mounted

Body : Aluminium

Fixings : Stainless Steel

Body Color : Anthracite Grey RAL 7016 - Umbra Grey RAL 7022 - Black RAL 9005

Led : Samsung

Driver : Tridonic / Philips / Eaglerise / Meanwell

Protection Type : IP65 / IK08

Ambient Temperature : - 30°C / 60°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Delivered ready to install.

Montaj Tipi : Ground Mounted

Gövde: Alüminyum

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Antrasit Gri RAL 7016 - Umbra Gri RAL 7022 - Siyah RAL 9005

Led : Samsung

Sürücü : Tridonic / Philips / Eaglerise / Meanwell

Koruma Sınıfı : IP65 / IK08


Ortam Sıcaklığı : - 30°C / 60°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Fabrikadan kurulumu hazır olarak teslim edilir.



Beam Informations And Technicals / Teknik ve Açısal Bilgiler

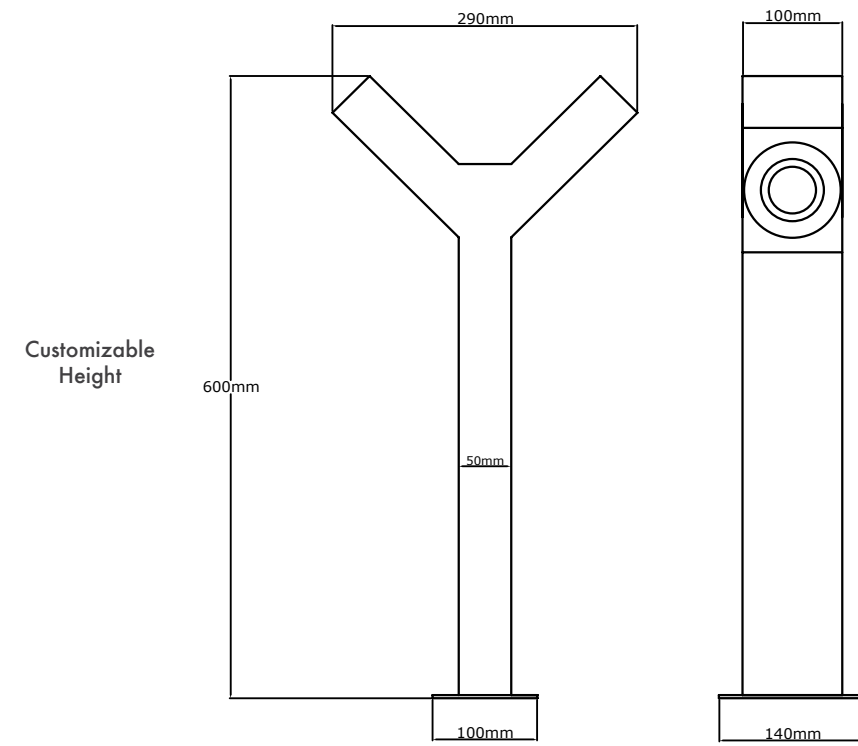

60° / Asymmetric

	3000K Lumen	4000K Lumen	6500K Lumen	Watt
Samsung Led	1800 lm	1850 lm	1900 lm	20 Watt



Available Finishes
Uygulama Renkleri

● Textured White Ral 9016 ● Textured Black Ral 9005 ● Textured Grey Ral 9006



Product Name: Enza U
Product Code: MB-026 XXXX
Model No: 16500026

Product Specification / Ürün Özellikleri

Installation Type : Ground Mounted

Body : Aluminium

Fixings : Stainless Steel

Body Color : Anthracite Grey RAL 7016 - Umbra Grey RAL 7022 - Black RAL 9005

Led : Samsung

Driver : Tridonic / Philips / Eaglerise / Meanwell

Protection Type : IP65 / IK08

Ambient Temperature : - 30°C / 60°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Delivered ready to install.

Montaj Tipi : Ground Mounted

Gövde: Alüminyum

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Antrasit Gri RAL 7016 - Umbra Gri RAL 7022 - Siyah RAL 9005

Led : Samsung

Sürücü : Tridonic / Philips / Eaglerise / Meanwell

Koruma Sınıfı : IP65 / IK08


Ortam Sıcaklığı : - 30°C / 60°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Fabrikadan kurulumu hazır olarak teslim edilir.



Beam Informations And Technicals / Teknik ve Açıl Bilgiler

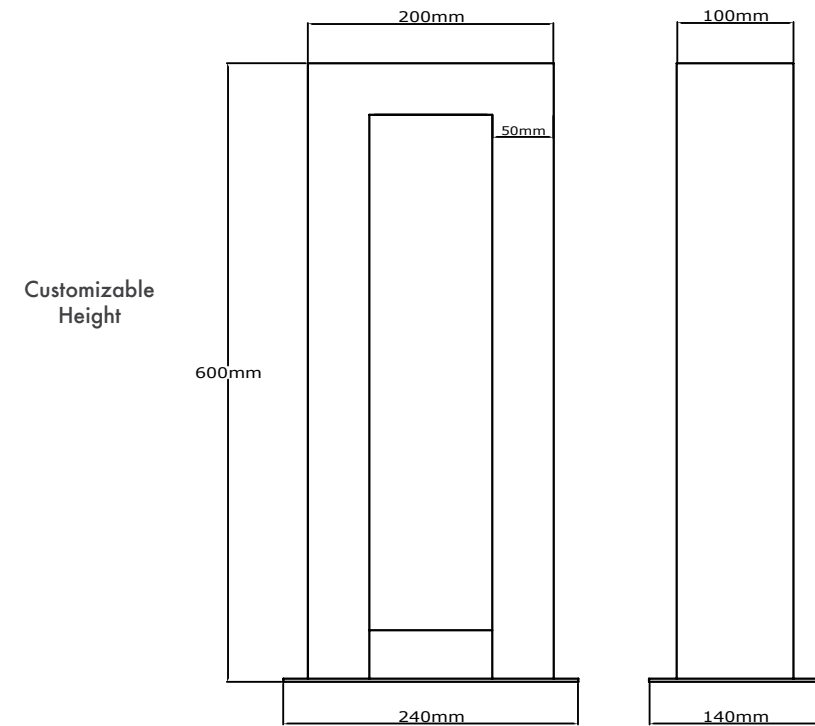

60° / Asymmetric


	3000K Lumen	4000K Lumen	6500K Lumen	Watt
Samsung Led	900 lm	925 lm	950 lm	10 Watt



Available Finishes
Uygulama Renkleri

● Textured White Ral 9016 ● Textured Black Ral 9005 ● Textured Grey Ral 9006

future proof

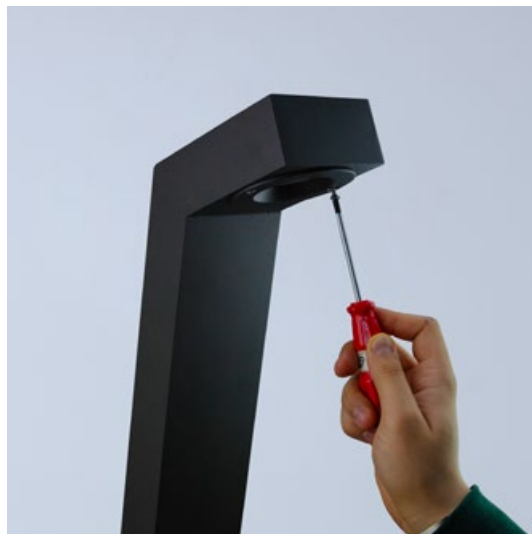

Futureproof Specifications


Modularity:

Design products with modular components that can be easily upgraded or replaced. This allows users to adapt to new technologies without having to replace the entire lighting system.

Durability and Longevity:

Build products with high-quality materials to ensure durability and a longer lifespan. This reduces the frequency of replacements and minimizes environmental impact.



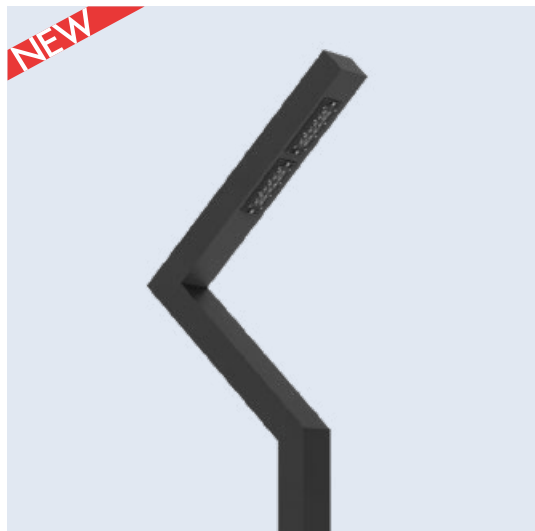

Product Name: Zigzag Decorative
Product Code: MDS-012 XXXX
Model No: 16300012

Product Specification / Ürün Özellikleri

Installation Type : Ground Mounted

Body : Aluminium

Fixings : Stainless Steel

Body Color : Anthracite Grey RAL 7016 - Umbra Grey RAL 7022 - Black RAL 9005

Led : Samsung

Driver : Tridonic / Philips / Inventronic / Meanwell

Protection Type : IP65 / IK08

Ambient Temperature : - 30°C / 60°C

Dimming Options : Phase-Cut / 1-10 V / DALI

Delivered ready to install.

Montaj Tipi : Ground Mounted

Gövde: Alüminyum

Bağlantılar : Paslanmaz Çelik

Gövde Rengi : Antrasit Gri RAL 7016 - Umbra Gri RAL 7022 - Siyah RAL 9005

Led : Samsung



Sürücü : Tridonic / Philips / Inventronic / Meanwell

Koruma Sınıfı : IP65 / IK08

Ortam Sıcaklığı : - 30°C / 60°C

Dim Opsiyonları : Phase-Cut / 1-10 V / DALI

Fabrikadan kurulumu hazır olarak teslim edilir.

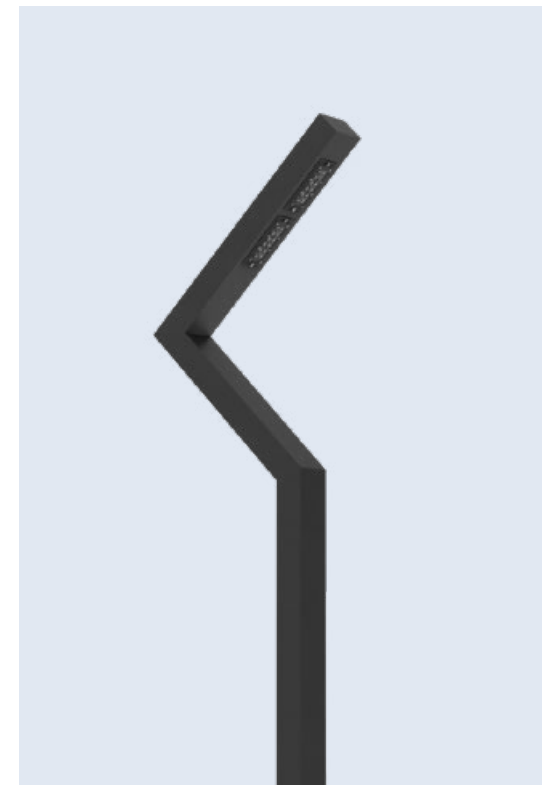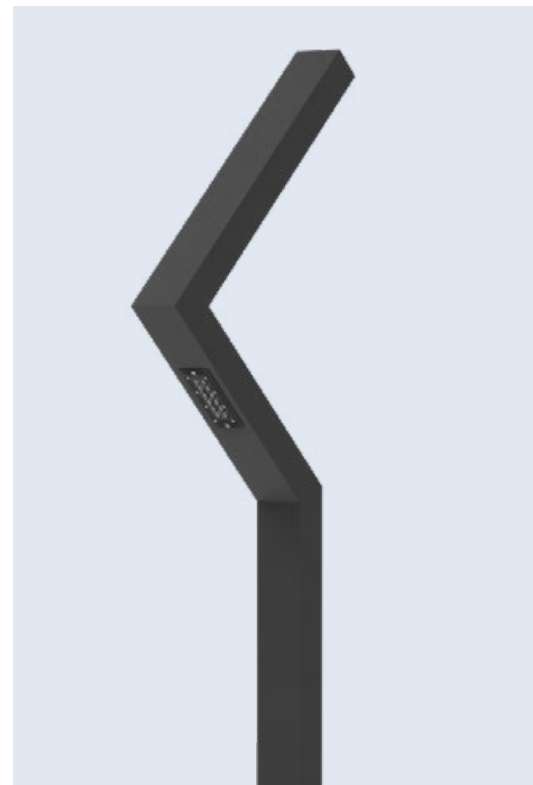

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



ASYM-75×154°

	3000K Lumen	4000K Lumen	6500K Lumen	1 Module Watt	Total Watt
Samsung Led	8100 lm	8400 lm	8700 lm	20 Watt	60 Watt
Samsung Led	10.125 lm	10.500 lm	10.875 lm	25 Watt	75 Watt
Samsung Led	14.175 lm	14.700 lm	15.225 lm	35 Watt	105 Watt

Available Finishes
Uygulama Renkleri


● Textured White Ral 9016

● Textured Black Ral 9005

● Textured Grey Ral 9006



INDOOR
OUTDOOR
PRIME
SEGMENT
EMERGENCY

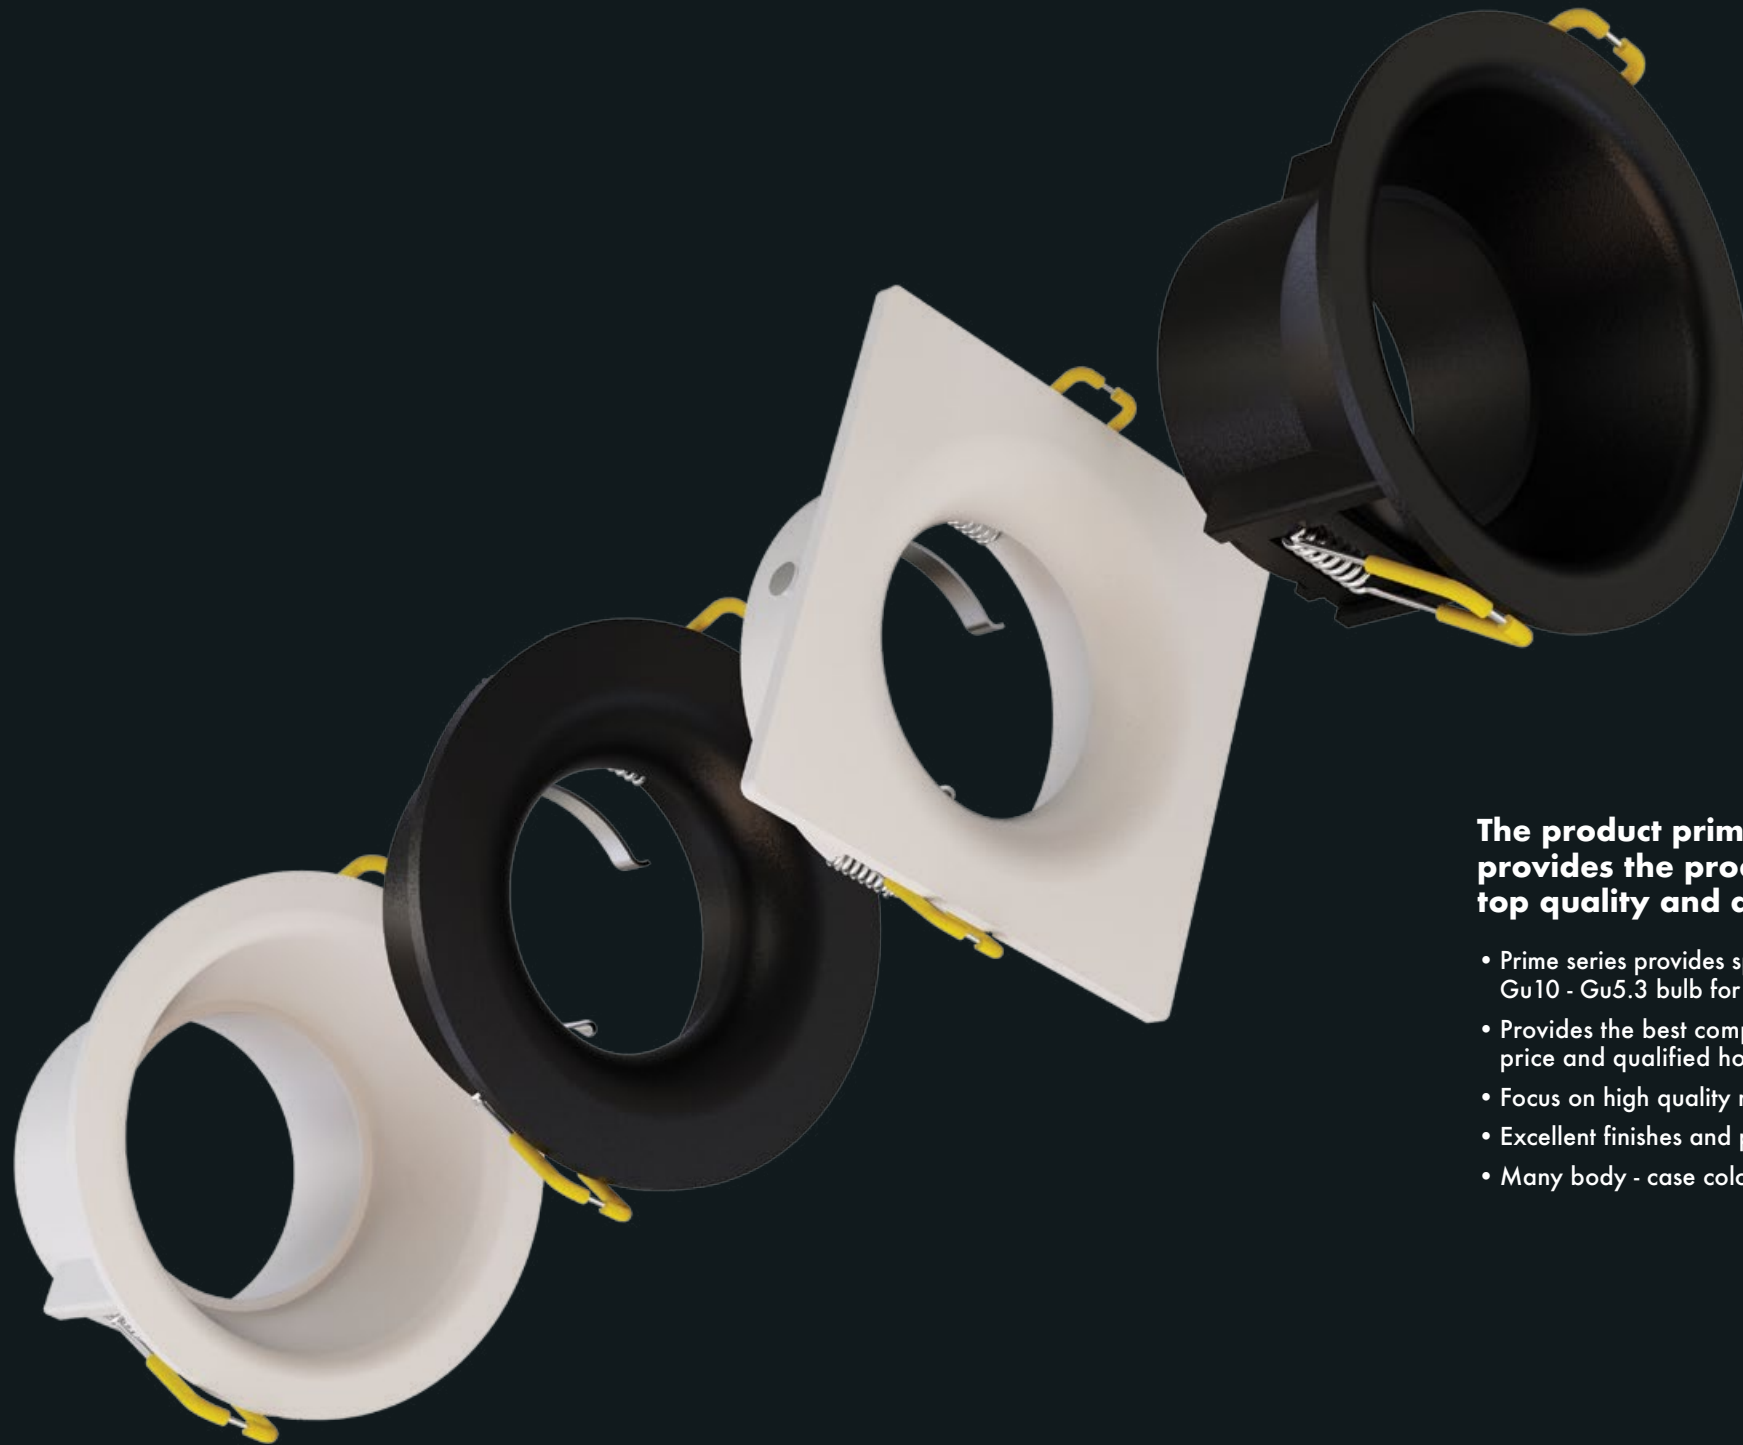

The product prime (PRIME) category provides the product types between an top quality and qualified performance.

- Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor
- Provides the best compromise between an attractive price and qualified housing quality.
- Focus on high quality material
- Excellent finishes and product design
- Many body - case color option

RECESSED SPOT CASE



The product prime (PRIME) category provides the product types between a top quality and qualified performance.

* Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor.

* Provides the best compromise between an attractive price and qualified housing quality.

* Focus on high quality material.

* Excellent finishes and product design.

* Many body - case - reflector color options.

Typical Applications :

- Houses and offices applications.
- Architectural applications.
- General lighting applications.
- Retail store applications.

M 200-60 31

10520060

Sumota Mini



White - Beyaz

Gu10 - Gu5.3

W/G:85mm - H/Y:75mm

Ø70mm

80 pcs

50x32x25

M 200-60 42

10520060

Sumota Mini



Black - Siyah

Gu10 - Gu5.3

W/G:85mm - H/Y:75mm

Ø70mm

80 pcs

50x32x25

M 200-75 31

10520075

Sumota Square



White - Beyaz

Gu10 - Gu5.3

W/G:84mm - H/Y:75mm

Ø70mm

80 pcs

50x32x25

M 200-75 42

10520075

Sumota Square



Black - Siyah

Gu10 - Gu5.3

W/G:84mm - H/Y:75mm

Ø70mm

80 pcs

50x32x25

MA 816-01 31

10581601

Sumota Deep



White - Beyaz

Gu10 - Gu5.3

W/G:89mm - H/Y:80mm

Ø80mm

50 pcs

50x32x25

MA 816-01 42

10581601

Sumota Deep



Black - Siyah

Gu10 - Gu5.3

W/G:89mm - H/Y:80mm

Ø80mm

50 pcs

50x32x25

M 300-103 31

10530103

Sumota Adjustable



White - Beyaz

Gu10 - Gu5.3

W/G:89mm - H/Y:80mm

Ø80mm

80 pcs

50x32x25

M 300-103 42

10530103

Sumota Adjustable



Black - Siyah

Gu10 - Gu5.3

W/G:89mm - H/Y:80mm

Ø80mm

80 pcs

50x32x25

M 300-109 31

10530109

Sumota Square Adjustable



White - Beyaz

Gu10 - Gu5.3

W/G:118mm - H/Y:75mm

Ø100mm

50 pcs

50x32x25

M 300-109 42

10530109

Sumota Square Adjustable



Black - Siyah

Gu10 - Gu5.3

W/G:118mm - H/Y:75mm

Ø100mm

50 pcs

50x32x25

MA 809-50 31

10580950

Verba



White - Beyaz

Gu10 - Gu5.3

W/G:77mm - H/Y:85mm

Ø68mm

50 pcs

50x32x25

MA 809-50 42

10580950

Verba



Black - Siyah

Gu10 - Gu5.3

W/G:77mm - H/Y:85mm

Ø68mm

50 pcs

50x32x25

MA 810-50 31

10581050

Versa



White - Beyaz

Gu10 - Gu5.3

W/G:94mm - H/Y:92mm

Ø80mm

50 pcs

50x32x25

MA 810-50 42

10581050

Versa



Black - Siyah

Gu10 - Gu5.3

W/G:94mm - H/Y:92mm

Ø80mm

50 pcs

50x32x25

MA 808-50 31

10580850

Verfa



White - Beyaz

Gu10 - Gu5.3

W/G:87mm - H/Y:100mm

Ø80mm

50 pcs

50x32x25

MA 808-50 42

10580850

Verfa



Black - Siyah

Gu10 - Gu5.3

W/G:87mm - H/Y:100mm

Ø80mm

50 pcs

50x32x25

MA 808-51 31

10580851

Verfa Adjustable



White - Beyaz

Gu10 - Gu5.3

W/G:87mm - H/Y:100mm

Ø80mm

50 pcs

50x32x25

MA 808-51 42

10580851

Verfa Adjustable



Black - Siyah

Gu10 - Gu5.3

W/G:87mm - H/Y:100mm

Ø80mm

50 pcs

50x32x25

MA 807-50 31

10580750

Verfa Square



White - Beyaz
Gu10 - Gu5.3
W/G:90mm - H/Y:100mm
Ø80mm
50 pcs
50x32x25

MA 807-50 42

10580750

Verfa Square



Black - Siyah
Gu10 - Gu5.3
W/G:90mm - H/Y:100mm
Ø80mm
50 pcs
50x32x25

MA 807-51 31

10580750

Verfa Square Adjustable



White - Beyaz
Gu10 - Gu5.3
W/G:90mm - H/Y:100mm
Ø80mm
50 pcs
50x32x25

MA 811-50 31

10581150

Valeri Basic Adjustable



White - Beyaz
Gu10 - Gu5.3
W/G:99mm - H/Y:100mm
Ø85mm
50 pcs
50x32x25

MA 811-50 42

10581150

Valeri Basic Adjustable



Black - Siyah
Gu10 - Gu5.3
W/G:99mm - H/Y:100mm
Ø85mm
50 pcs
50x32x25

MA 811-51 31

10581151

Valeri Step Adjustable



White - Beyaz
Gu10 - Gu5.3
W/G:99mm - H/Y:100mm
Ø85mm
50 pcs
50x32x25

MA 807-51 42

10580750

Verfa Square Adjustable



Black - Siyah
Gu10 - Gu5.3
W/G:90mm - H/Y:100mm
Ø80mm
50 pcs
50x32x25

MA 813-50 31

10581350

Versa 3" Round



White - Beyaz
Gu10 - Gu5.3
W/G:118mm - H/Y:90mm
Ø90mm
40 pcs
50x32x25

MA 813-50 42

10581350

Versa 3" Round



Black - Siyah
Gu10 - Gu5.3
W/G:118mm - H/Y:90mm
Ø90mm
40 pcs
50x32x25

MA 811-51 42

10581151

Valeri Step Adjustable



Black - Siyah
Gu10 - Gu5.3
W/G:99mm - H/Y:100mm
Ø85mm
50 pcs
50x32x25

MA 200-10 31

10520010

Compact Mini Basic



White - Beyaz
Gu10 - Gu5.3
W/G:84mm - H/Y:75mm
Ø70mm
50 pcs
50x32x25

MA 200-10 42

10520010

Compact Mini Basic



Black - Siyah
Gu10 - Gu5.3
W/G:84mm - H/Y:75mm
Ø70mm
50 pcs
50x32x25

MA 813-52 31

10581352

Versa 3" Round Double



White - Beyaz
Gu10 - Gu5.3
W/G:235mm - H/Y:90mm
Ø80mm
25 pcs
50x32x25

MA 813-52 42

10581352

Versa 3" Round Double



Black - Siyah
Gu10 - Gu5.3
W/G:235mm - H/Y:90mm
Ø80mm
25 pcs
50x32x25

MA 804-50 31

10580450

Veko



White - Beyaz
Gu10 - Gu5.3
W/G:69mm - H/Y:75mm
Ø60mm
80 pcs
50x32x25

MA 804-50 42

10580450

Veko



Black - Siyah
Gu10 - Gu5.3
W/G:69mm - H/Y:75mm
Ø60mm
80 pcs
50x32x25

M 200-57 31

10520057

Eleni Fixed



White - Beyaz
Gu10 - Gu5.3
W/G:92mm - H/Y:75mm
Ø70mm
80 pcs
50x32x25

M 200-57 42

10520057

Eleni Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:92mm - H/Y:75mm
Ø70mm
80 pcs
50x32x25

MA 94-060 31

10594060

Azer Square



White - Beyaz
Gu10 - Gu5.3
W/G:87mm - H/Y:65mm
Ø75mm
80 pcs
50x32x25

MA 94-060 42

10594060

Azer Square



Black - Siyah
Gu10 - Gu5.3
W/G:87mm - H/Y:65mm
Ø75mm
80 pcs
50x32x25

MA 94-060-2 31

10594062

Azer Square Double



White - Beyaz
Gu10 - Gu5.3
W/G:87x175mm - H/Y:65mm
Ø75x2mm
40 pcs
50x32x25

MA 94-060-2 42

10594062

Azer Square Double



Black - Siyah
Gu10 - Gu5.3
W/G:87x175mm - H/Y:65mm
Ø75x2mm
40 pcs
50x32x25

MA 94-060-3 31

10594063

Azer Square Trio



White - Beyaz
Gu10 - Gu5.3
W/G:87x262mm - H/Y:65mm
Ø75x3mm
25 pcs
50x32x25

MA 94-060-3 42

10594063

Azer Square Trio



Black - Siyah
Gu10 - Gu5.3
W/G:87x262mm - H/Y:65mm
Ø75x3mm
25 pcs
50x32x25

MA 920-01 31

10592001

Hefta Adjustable



White - Beyaz
Gu10 - Gu5.3
W/G:82mm - H/Y:75mm
Ø70mm
80 pcs
50x32x25

MA 920-01 42

10592001

Hefta Adjustable



Black - Siyah
Gu10 - Gu5.3
W/G:82mm - H/Y:75mm
Ø70mm
80 pcs
50x32x25

MA 94-060 31

10594060

Azer Square



White - Beyaz
Gu10 - Gu5.3
W/G:87mm - H/Y:65mm
Ø75mm
80 pcs
50x32x25

MA 94-060 42

10594060

Azer Square



Black - Siyah
Gu10 - Gu5.3
W/G:87mm - H/Y:65mm
Ø75mm
80 pcs
50x32x25

MA 94-060-2 31

10594062

Azer Square Double




White - Beyaz
Gu10 - Gu5.3
W/G:87x175mm - H/Y:65mm
Ø75x2mm
40 pcs
50x32x25

MA 94-060-2 42

10594062

Azer Square Double



Black - Siyah
Gu10 - Gu5.3
W/G:87x175mm - H/Y:65mm
Ø75x2mm
40 pcs
50x32x25

MA 94-060-3 31

10594063

Azer Square Trio



White - Beyaz
Gu10 - Gu5.3
W/G:87x262mm - H/Y:65mm
Ø75x3mm
25 pcs
50x32x25

MA 94-060-3 42

10594063

Azer Square Trio



Black - Siyah
Gu10 - Gu5.3
W/G:87x262mm - H/Y:65mm
Ø75x3mm
25 pcs
50x32x25



ModuLed
RF45



Fits in to existing
GU10 - MR16
luminaires.

**M RF45 S-302**

12005045

ModuLed RF45



3000 Kelvin - CRI>80
900 lm
8 Watt
40°
W/G:50mm - H/Y:45mm
50 pcs
50x32x25

M RF45 S-306

12005045

ModuLed RF45



4000 Kelvin - CRI>80
920 lm
8 Watt
40°
W/G:50mm - H/Y:45mm
50 pcs
50x32x25

M RF45 S-301

12005045

ModuLed RF45



6500 Kelvin - CRI>80
945 lm
8 Watt
40°
W/G:50mm - H/Y:45mm
50 pcs
50x32x25

M 200-27 31

10520127

Eleni Flat



White - Beyaz
Gu10 - Gu5.3
W/G:93mm - H/Y:70mm
Ø85mm
80 pcs
50x32x25

M 200-27 42

10520127

Eleni Flat



Black - Siyah
Gu10 - Gu5.3
W/G:93mm - H/Y:70mm
Ø85mm
80 pcs
50x32x25

M 200-78 31

10520078

Aprilla 2" Gu10



White - Beyaz
Gu10 - Gu5.3
W/G:100mm - H/Y:75mm
Ø85mm
50 pcs
50x32x25

MA 806-03 31

10580603

Ivy V2 Adjustable



White - Beyaz
Gu10 - Gu5.3
W/G:92mm - H/Y:85mm
82X82mm
50 pcs
50x32x25

MA 806-03 42

10580603

Ivy V2 Adjustable



Black - Siyah
Gu10 - Gu5.3
W/G:92mm - H/Y:85mm
82X82mm
50 pcs
50x32x25

MA 857 -01 31

10585701

Velar Mini



White - Beyaz
Gu10 - Gu5.3
W/G:95mm - H/Y:75mm
Ø80mm
50 pcs
50x32x25

M 200-78 42

10520078

Aprilla 2" Gu10



Black - Siyah
Gu10 - Gu5.3
W/G:100mm - H/Y:75mm
Ø85mm
50 pcs
50x32x25

M 200-79 31

10520079

Aprilla Square 2"



White - Beyaz
Gu10 - Gu5.3
W/G:94mm - H/Y:75mm
Ø85mm
50 pcs
50x32x25

M 200-79 42

10520079

Aprilla Square 2"



Black - Siyah
Gu10 - Gu5.3
W/G:94mm - H/Y:75mm
Ø85mm
50 pcs
50x32x25

MA 857 -01 42

10585701

Velar Mini



Black - Siyah
Gu10 - Gu5.3
W/G:95mm - H/Y:75mm
Ø80mm
50 pcs
50x32x25

M 200-13A 31

10520013A

Pinhole/A




White - Beyaz
Gu10 - Gu5.3
W/G:85mm - H/Y:75mm
Ø80mm
80 pcs
50x32x25

M 200-13A 42

10520013A

Pinhole/A

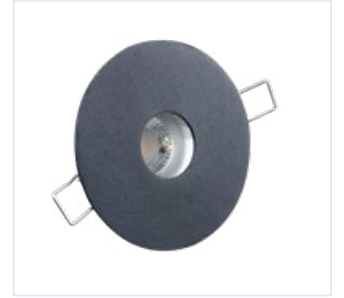

Black - Siyah
Gu10 - Gu5.3
W/G:85mm - H/Y:75mm
Ø80mm
80 pcs
50x32x25

MA 806-02 31

10580602

Ivy V2



White - Beyaz
Gu10 - Gu5.3
W/G:92mm - H/Y:85mm
82X82mm
50 pcs
50x32x25

MA 806-02 42

10580602

Ivy V2



Black - Siyah
Gu10 - Gu5.3
W/G:92mm - H/Y:85mm
82X82mm
50 pcs
50x32x25

M 010 50 31

10501050

Zara Single Adjustable



White - Beyaz
Gu10 - Gu5.3
W/G:100mm - H/Y:90mm
75x75mm
50 pcs
50x32x25

M 010 50 42

10501050

Zara Single Adjustable



Black - Siyah
Gu10 - Gu5.3
W/G:100mm - H/Y:90mm
75x75mm
50 pcs
50x32x25

M 010 51 31

10501051

Zara Double Adjustable



White - Beyaz

Gu10 - Gu5.3

W/G:180x100mm - H/Y:75mm

75x155mm

25 pcs

50x32x25

M 010 51 42

10501051

Zara Double Adjustable



Black - Siyah

Gu10 - Gu5.3

W/G:180x100mm - H/Y:75mm

75x155mm

25 pcs

50x32x25

MA 852-01 31

10585201

Solid Single Adjustable



White - Beyaz

Gu10 - Gu5.3

W/G:120mm - H/Y:75mm

100X100mm

50 pcs

50x32x25

MA 852-01 42

10585201

Solid Single Adjustable



Black - Siyah

Gu10 - Gu5.3

W/G:120mm - H/Y:75mm

100X100mm

50 pcs

50x32x25

MA 856-02 31

10585602

Solid Double Adjustable



White - Beyaz

Gu10 - Gu5.3

W/G:228x120mm - H/Y:75mm

100x200mm

25 pcs

50x32x25

MA 851-01 31

10585101

Solid Single Fixed



White - Beyaz

Gu10 - Gu5.3

W/G:120mm - H/Y:85mm

100X100mm


50 pcs

50x32x25

MA 851-01 42

10585101

Solid Single Fixed



Black - Siyah

Gu10 - Gu5.3

W/G:120mm - H/Y:85mm

100X100mm

50 pcs

50x32x25

MA 856-02 42

10585602

Solid Double Adjustable



Black - Siyah

Gu10 - Gu5.3

W/G:228x120mm - H/Y:75mm

100x200mm

25 pcs

50x32x25

MA 811-54 31

10581154

Strada Basic Adjustable



White - Beyaz

Gu10 - Gu5.3

W/G:117mm - H/Y:75mm

Ø100mm

50 pcs

50x32x25

MA 811-54 42

10581154

Strada Basic Adjustable



Black - Siyah

Gu10 - Gu5.3

W/G:117mm - H/Y:75mm

Ø100mm

50 pcs

50x32x25

MA 811-55 31

10581155

Strada Step Adjustable



White - Beyaz

Gu10 - Gu5.3

W/G:117mm - H/Y:75mm

Ø100mm

50 pcs

50x32x25

MA 811-55 42

10581155

Strada Step Adjustable



Black - Siyah

Gu10 - Gu5.3

W/G:117mm - H/Y:75mm

Ø100mm

50 pcs

50x32x25

MA 812-62 31

10581262

Veito Double Basic Adjustable



White - Beyaz
 Gu10 - Gu5.3
 W/G:235x118mm - H/Y:100mm
 Ø100mmx2
 25 pcs
 50x32x25

MA 812-62 42

10581262

Veito Double Basic Adjustable



Black - Siyah
 Gu10 - Gu5.3
 W/G:235x118mm - H/Y:100mm
 Ø100mmx2
 25 pcs
 50x32x25

MA 812-60 31

10581260

Cairo Double Basic Adjustable



White - Beyaz
 Gu10 - Gu5.3
 W/G:235x118mm - H/Y:95mm
 Ø100mmx2
 25 pcs
 50x32x25

MA 812-60 42

10581260

Cairo Double Basic Adjustable



Black - Siyah
 Gu10 - Gu5.3
 W/G:235x118mm - H/Y:95mm
 Ø100mmx2
 25 pcs
 50x32x25

MA 812-58 31

10581258

Cairo Basic Adjustable




White - Beyaz
 Gu10 - Gu5.3
 W/G:118mm - H/Y:95mm
 Ø100mm
 50 pcs
 50x32x25


MA 812-58 42

10581258

Cairo Basic Adjustable



Black - Siyah
 Gu10 - Gu5.3
 W/G:118mm - H/Y:95mm
 Ø100mm
 50 pcs
 50x32x25

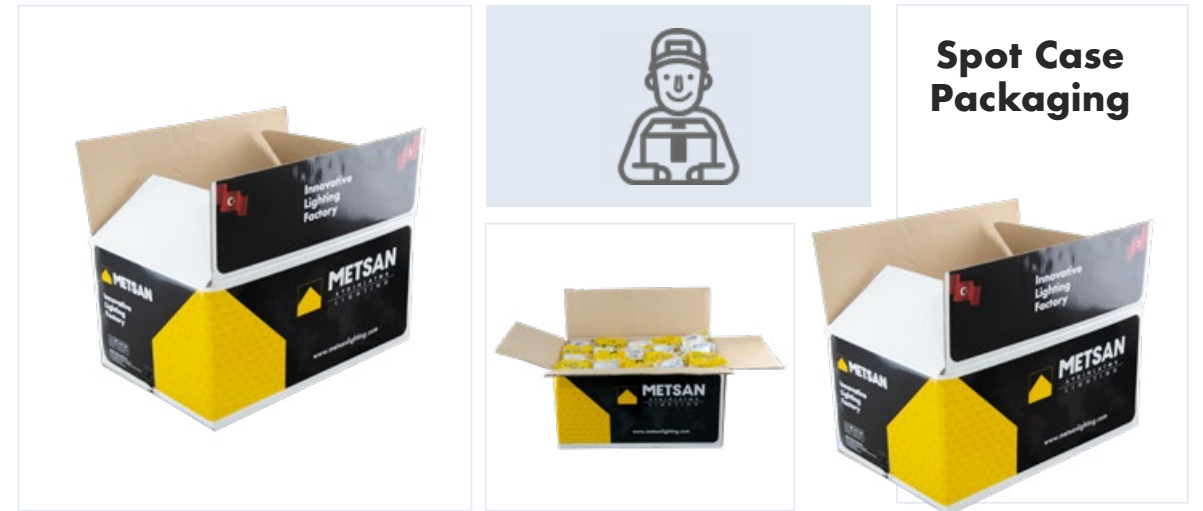



RECEYCLED PLASTIC SPOT CASE

Made of recycled plastics, the spot case contributes to the reduction of CO2 emissions and landfill waste.

*Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor.

*Provides the best compromise between an attractive price and qualified housing quality.

* Focus on high quality material.

* Excellent finishes and product design.

* Many textured frame design black and white color options.

Typical Applications:

- Houses and offices applications.
- Architectural applications.
- General lighting applications.
- Retail store applications.

MPA-001 31

20500131

Derely Adjustable WT



White - Beyaz

Gu10 - Gu5.3

W/G:90mm - H/Y:85mm

Ø75mm

80 pcs

50x32x25

MPA-001 42

20500142

Derely Adjustable BK



Black - Siyah

Gu10 - Gu5.3

W/G:90mm - H/Y:85mm

Ø75mm

80 pcs

50x32x25

GALAXY FAMILY



The product prime (PRIME) category provides the product types between a top quality and qualified performance.

* Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor.

* Provides the best compromise between an attractive price and qualified housing quality.

* Focus on high quality material.

* Excellent finishes and product design.

* Many body - case - reflector color options.

Typical Applications :

- Houses and offices applications.
- Architectural applications.
- General lighting applications.
- Retail store applications.

MA 81-060/X 31

10581600

Draco



White - Beyaz

Gu10 - Gu5.3

W/G:87mm - H/Y:85mm

Ø70mm

80 pcs

50x32x25

MA 81-060/X 42

10581600

Draco



Black - Siyah

Gu10 - Gu5.3

W/G:87mm - H/Y:85mm

Ø70mm

80 pcs

50x32x25

MA 82-060/X 31

10582600

Leo



White - Beyaz

Gu10 - Gu5.3

W/G:90mm - H/Y:85mm

Ø70mm

80 pcs

50x32x25

MA 82-060/X 42

10582600

Leo



Black - Siyah

Gu10 - Gu5.3

W/G:90mm - H/Y:85mm

Ø70mm

80 pcs

50x32x25

MA 82-060/X-2 31

10582602

Leo Double



White - Beyaz

Gu10 - Gu5.3

W/G:180x90mm - H/Y:85mm

Ø70mmx2


25 pcs

50x32x25

MA 82-060/X-2 42

10582602

Leo Double

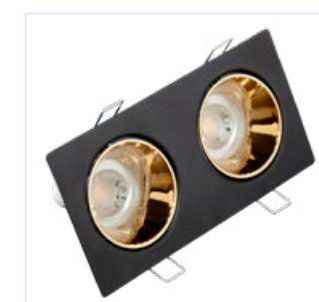

Black - Siyah

Gu10 - Gu5.3

W/G:180x90mm - H/Y:85mm

Ø100mmx2

25 pcs

50x32x25

MA 83-060/X 31

10583600

Electra



White - Beyaz

Gu10 - Gu5.3

W/G:90mm - H/Y:85mm

75x75mm

80 pcs

50x32x25

MA 83-060/X 42

10583600

Electra



Black - Siyah

Gu10 - Gu5.3

W/G:75mm - H/Y:85mm

75x75mm

80 pcs

50x32x25

Reflector Colors Reflektör Renkleri

- Chrome - Krom
- Copper - Bakır
- Gold - Altın
- Platinum - Platin
- Black - Siyah
- White - Beyaz

MA 83-060/X-2 31

10583602

Electra Double



White - Beyaz
Gu10 - Gu5.3
W/G:179x90mm - H/Y:85mm
160x75mm
25 pcs
50x32x25

MA 83-060/X-2 42

10583602

Electra Double



Black - Siyah
Gu10 - Gu5.3
W/G:179x90mm - H/Y:85mm
160x75mm
25 pcs
50x32x25

MA 84-080/X 31

10584800

Epsilon



White - Beyaz
Gu10 - Gu5.3
W/G:118mm - H/Y:90mm
Ø100mm
50 pcs
50x32x25

MA 81-061/X 31

10581601

Draco Fixed




White - Beyaz
Gu10 - Gu5.3
W/G:86mm - H/Y:85mm
Ø65mm
80 pcs
50x32x25

MA 81-061/X 42

10581601

Draco Fixed

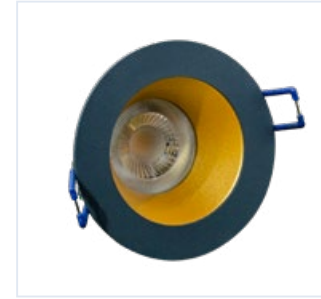

Black - Siyah
Gu10 - Gu5.3
W/G:86mm - H/Y:85mm
Ø65mm
80 pcs
50x32x25

MA 81-061/X-2 31

10581621

Draco Double Fixed




White - Beyaz
Gu10 - Gu5.3
W/G:174x86mm - H/Y:85mm
Ø65mmx2 (CTC is 88mm)
25 pcs
50x32x25

MA 84-080/X 42

10584800

Epsilon

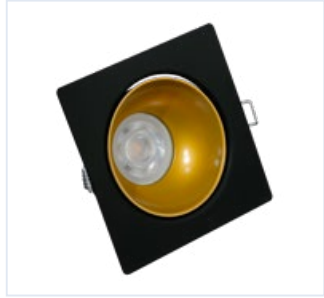

Black - Siyah
Gu10 - Gu5.3
W/G:118mm - H/Y:90mm
Ø100mm
50 pcs
50x32x25

MA 84-080/X-2 31

10584802

Epsilon Double



White - Beyaz
Gu10 - Gu5.3
W/G:223x112mm - H/Y:90mm
Ø100mmx2
20 pcs
50x32x25

MA 84-080/X-2 42

10584802

Epsilon Double



Black - Siyah
Gu10 - Gu5.3
W/G:223x112mm - H/Y:90mm
Ø100mmx2
20 pcs
50x32x25

MA 81-061/X-2 42

10581621

Draco Double Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:174x86mm - H/Y:85mm
Ø65mmx2 (CTC is 88mm)
25 pcs
50x32x25

MA 81-061/X-3 31

10581631

Draco Trio Fixed



White - Beyaz
Gu10 - Gu5.3
W/G:262x86mm - H/Y:85mm
Ø65mmx3 (CTC is 88mm)
20 pcs
50x32x25

MA 81-061/X-3 42

10581631

Draco Trio Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:262x86mm - H/Y:85mm
Ø65mmx3 (CTC is 88mm)
20 pcs
50x32x25

MA 85-080/X 31

10585800

Venus



White - Beyaz
Gu10 - Gu5.3
W/G:112mm - H/Y:98mm
Ø100mm
50 pcs
50x32x25

MA 85-080/X 42

10585800

Venus



Black - Siyah
Gu10 - Gu5.3
W/G:112mm - H/Y:98mm
Ø100mm
50 pcs
50x32x25

MA 85-081/X 31

10585801

Venus Fixed




White - Beyaz
Gu10 - Gu5.3
W/G:112mm - H/Y:98mm
Ø85mm
50 pcs
50x32x25

MA 85-081/X 42

10585801

Venus Fixed

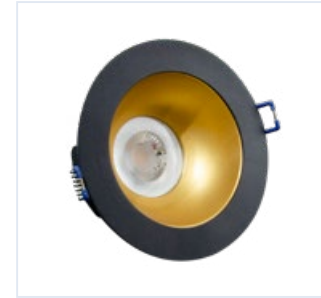

Black - Siyah
Gu10 - Gu5.3
W/G:112mm - H/Y:98mm
Ø85mm
50 pcs
50x32x25

Reflector Colors
 Reflektör Renkleri

- Chrome - Krom
- Copper - Bakır
- Gold - Altın
- Platinum - Platin
- Black - Siyah
- White - Beyaz

MA 85-081/X-2 31

10585821

Venus Double Fixed



White - Beyaz
Gu10 - Gu5.3
W/G:223x112mm - H/Y:98mm
Ø85mmx2 (CTC is 111mm)
20 pcs
50x32x25

MA 85-081/X-2 42

10585821

Venus Double Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:223x112mm - H/Y:98mm
Ø85mmx2 (CTC is 111mm)
20 pcs
50x32x25

MA 85-081/X-3 31

10585831

Venus Trio Fixed




White - Beyaz
Gu10 - Gu5.3
W/G:334x113mm - H/Y:98mm
Ø85mmx3 (CTC is 88mm)
16 pcs
50x32x25

MA 82-061/X-3 31

10582631

Leo Trio Fixed

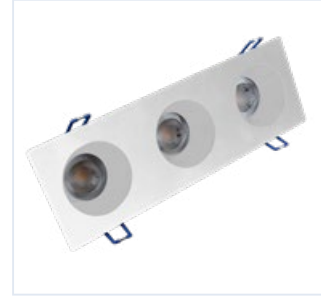

White - Beyaz
Gu10 - Gu5.3
W/G:262x86mm - H/Y:85mm
Ø65mmx3 (CTC is 88mm)
20 pcs
50x32x25

MA 82-061/X-3 42

10582631

Leo Trio Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:262x86mm - H/Y:85mm
Ø65mmx3 (CTC is 88mm)
20 pcs
50x32x25

MA 84-081/X 31

10584801

Epsilon Fixed



White - Beyaz
Gu10 - Gu5.3
W/G:112x112mm - H/Y:98mm
Ø85mm
50 pcs
50x32x25

MA 85-081/X-3 42

10585831

Venus Trio Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:334x113mm - H/Y:98mm
Ø85mmx3 (CTC is 88mm)
16 pcs
50x32x25

MA 82-061/X 31

10582601

Leo Fixed



White - Beyaz
Gu10 - Gu5.3
W/G:86x86mm - H/Y:85mm
Ø65mm
80 pcs
50x32x25

MA 82-061/X 42

10582601

Leo Fixed




Black - Siyah
Gu10 - Gu5.3
W/G:86x86mm - H/Y:85mm
Ø65mm
80 pcs
50x32x25

MA 84-081/X 42

10584801

Epsilon Fixed

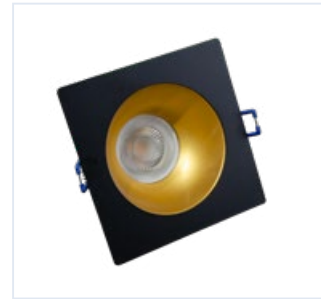


Black - Siyah
Gu10 - Gu5.3
W/G:112x112mm - H/Y:98mm
Ø85mm
50 pcs
50x32x25

MA 84-081/X-2 31

10584821

Epsilon Double Fixed

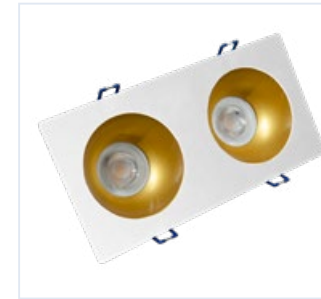


White - Beyaz
Gu10 - Gu5.3
W/G:118mm - H/Y:98mm
Ø85mmx2 (CTC is 111mm)
20 pcs
50x32x25

MA 84-081/X-2 42

10584821

Epsilon Double Fixed

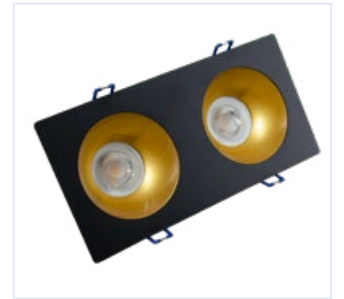

Black - Siyah
Gu10 - Gu5.3
W/G:118mm - H/Y:98mm
Ø85mmx2 (CTC is 111mm)
20 pcs
50x32x25

MA 82-061/X-2 31

10582621

Leo Double Fixed



White - Beyaz
Gu10 - Gu5.3
W/G:174x86mm - H/Y:85mm
Ø65mmx2 (CTC is 88mm)
25 pcs
50x32x25

MA 82-061/X-2 42

10582621

Leo Double Fixed




Black - Siyah
Gu10 - Gu5.3
W/G:174x86mm - H/Y:85mm
Ø65mmx2 (CTC is 88mm)
25 pcs
50x32x25

MA 84-081/X-3 31

10584831

Epsilon Trio Fixed

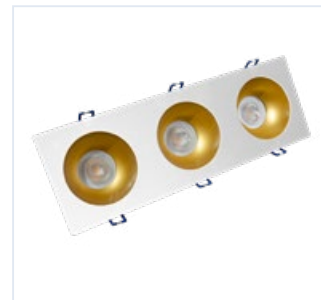


White - Beyaz
Gu10 - Gu5.3
W/G:118mm - H/Y:95mm
Ø85mmx3 (CTC is 88mm)
16 pcs
50x32x25

MA 84-081/X-3 42

10584831

Epsilon Trio Fixed

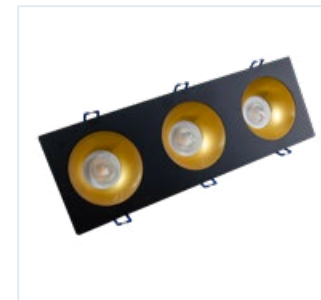

Black - Siyah
Gu10 - Gu5.3
W/G:118mm - H/Y:95mm
Ø85mmx3 (CTC is 88mm)
16 pcs
50x32x25

Reflector Colors
 Reflektör Renkləri

- Chrome - Krom
- Copper - Bakır
- Gold - Altın
- Platinum - Platin
- Black - Siyah
- White - Beyaz

MA 83-061/X 31

10583601

Electra Fixed



White - Beyaz
Gu10 - Gu5.3
W/G:86x86mm - H/Y:85mm
65x65mm
50 pcs
50x32x25

MA 83-061/X 42

10583601

Electra Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:86x86mm - H/Y:85mm
65x65mm
50 pcs
50x32x25

MA 83-061/X-2 31

10583621

Electra Double Fixed




White - Beyaz
Gu10 - Gu5.3
W/G:149x86mm - H/Y:85mm
125x65mm
25 pcs
50x32x25

MA 86-081/X 31

10586801

Dorado Fixed

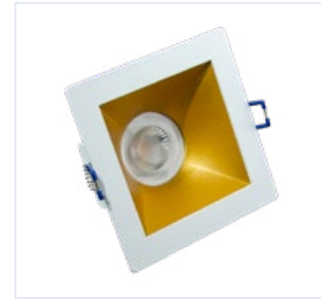

White - Beyaz
Gu10 - Gu5.3
W/G:112x112mm - H/Y:98mm
85x85mm
50 pcs
50x32x25

MA 86-080/X 42

10586801

Dorado Fixed




Black - Siyah
Gu10 - Gu5.3
W/G:112x112mm - H/Y:98mm
85x85mm
50 pcs
50x32x25

MA 86-081/X-2 31

10586821

Dorado Double Fixed

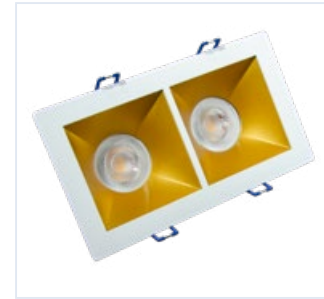

White - Beyaz
Gu10 - Gu5.3
W/G:195x112mm - H/Y:98mm
165x85mm
20 pcs
50x32x25

MA 83-061/X-2 42

10583621

Electra Double Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:149x86mm - H/Y:85mm
125x65mm
25 pcs
50x32x25

MA 83-061/X-3 31

10583631

Electra Trio Fixed



White - Beyaz
Gu10 - Gu5.3
W/G:212x86mm - H/Y:85mm
190x65mm
20 pcs
50x32x25

MA 83-061/X-3 42

10583631

Electra Trio Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:212x86mm - H/Y:85mm
190x65mm
20 pcs
50x32x25

MA 86-081/X-2 42

10586821

Dorado Double Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:195x112mm - H/Y:98mm
165x85mm
20 pcs
50x32x25

MA 86-081/X-3 31

10586831

Dorado Trio Fixed



White - Beyaz
Gu10 - Gu5.3
W/G:279x112mm - H/Y:98mm
249x85mm
16 pcs
50x32x25

MA 86-081/X-3 42

10586831

Dorado Trio Fixed



Black - Siyah
Gu10 - Gu5.3
W/G:279x112mm - H/Y:98mm
249x85mm
16 pcs
50x32x25

MA 86-080/X 31

10586800

Dorado



White - Beyaz
Gu10 - Gu5.3
W/G:119x119mm - H/Y:98mm
100x100mm
50 pcs
50x32x25

MA 86-080/X 42

10586800

Dorado



Black - Siyah
Gu10 - Gu5.3
W/G:119x119mm - H/Y:98mm
100x100mm
50 pcs
50x32x25

M 010-01 31

10501001

Big Pluton



White - Beyaz
Gu10 - Gu5.3
W/G:81mm - H/Y:75mm
Ø70mm
80 pcs
50x32x25

M 010-01 42

10501001

Big Pluton



Black - Siyah
Gu10 - Gu5.3
W/G:81mm - H/Y:75mm
Ø70mm
80 pcs
50x32x25

M 011-04 31

10501104

Italian Pluton



White - Beyaz
Gu10 - Gu5.3
W/G:81mm - H/Y:65mm
Ø70mm
80 pcs
50x32x25

BIG PLUTON

PREMIUM FINISHES

M 011-04 42

10501104

Italian Pluton



Black - Siyah
Gu10 - Gu5.3
W/G:81mm - H/Y:65mm
Ø70mm
80 pcs
50x32x25

M 700 503

10570503

Crystal Square



White - Beyaz
Gu10 - Gu5.3
W/G:90mm - H/Y:75mm
Ø70mm
50 pcs
50x32x25

M 700 515

10570515

Crystal Round



White - Beyaz
Gu10 - Gu5.3
W/G:90mm - H/Y:75mm
Ø70mm
50 pcs
50x32x25

Gold Patina
Altın EskiTme



Chrome Patina
Chrome EskiTme



Chrome Satin
Chrome Satin

**M 010 5074 07**

10557407

Zamak Square



Chrome Satin - Krom Satin
Gu10 - Gu5.3
W/G:90mm - H/Y:75mm
Ø75mm
80 pcs
50x32x25

M 010 507 05


10590021

Zamak Round




Chrome - Krom
Gu10 - Gu5.3
W/G:93mm - H/Y:75mm
Ø75mm
80 pcs
50x32x25

Gold
Altın



Chrome
Chrome

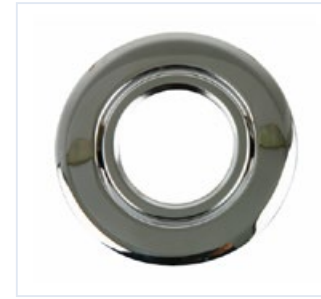

TANGO FAMILY

The product prime (PRIME) category provides the product types between a top quality and qualified performance.

* Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor.

* Provides the best compromise between an attractive price and qualified housing quality.



* Focus on high quality material.

* Excellent finishes and product design.

* Many body - case - reflector color options.

Typical Applications :

- Houses and offices applications.
- Architectural applications.
- General lighting applications.
- Retail store applications.

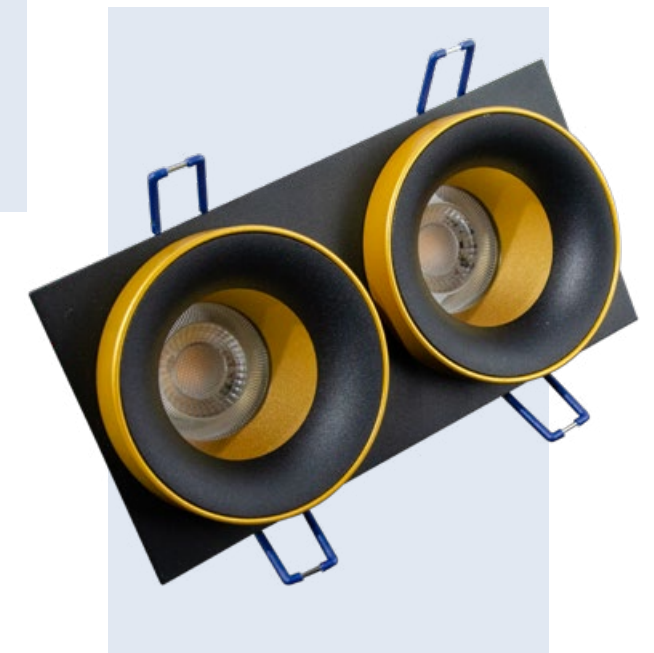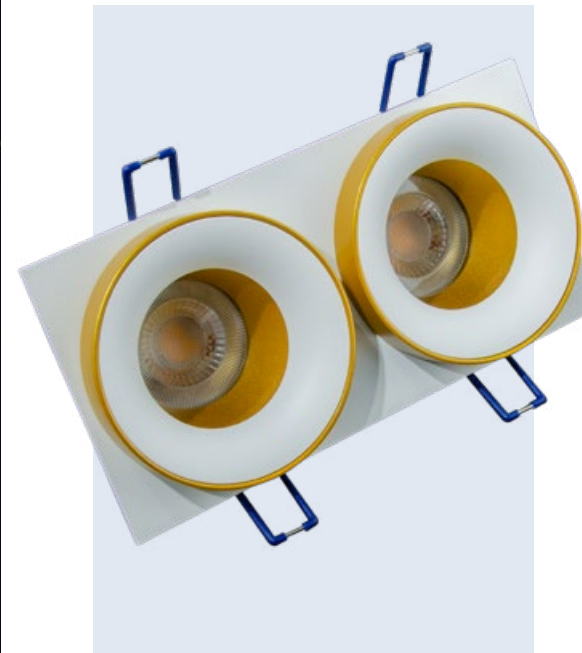

**FELL
THE GALAXY**



MA 900/XX 31

10590000

Tango Round



White - Beyaz
Gu10 - Gu5.3
W/G:92mm - H/Y:60mm
Ø70mm
80 pcs
50x32x25

MA 900/XX 42

10590000

Tango Round



Black - Siyah
Gu10 - Gu5.3
W/G:92mm - H/Y:60mm
Ø100mm
80 pcs
50x32x25

MA 901/XX 31

10590001

Tango Square



White - Beyaz
Gu10 - Gu5.3
W/G:87x87mm - H/Y:60mm
Ø70mm
80 pcs
50x32x25

MA 910/XX/YY 31

10590010

Tango Ganna Round



White - Beyaz
Gu10 - Gu5.3
W/G:92mm - H/Y:85mm
Ø70mm
80 pcs
50x32x25

MA 910/XX/YY 42

10590010

Tango Ganna Round




Black - Siyah
Gu10 - Gu5.3
W/G:92mm - H/Y:85mm
Ø70mm
80 pcs
50x32x25

MA 911/XX/YY 31

10590011

Tango Ganna Square

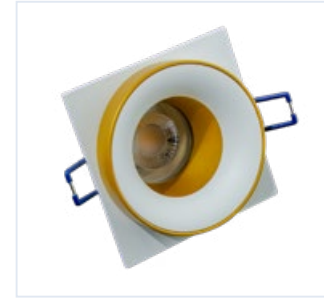


White - Beyaz
Gu10 - Gu5.3
W/G:87x87mm - H/Y:85mm
Ø100mm
80 pcs
50x32x25

MA 901/XX 42

10590001

Tango Square

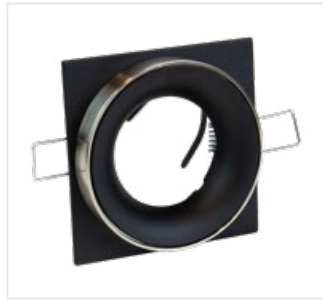

Black - Siyah
Gu10 - Gu5.3
W/G:87x87mm - H/Y:60mm
Ø70mm
80 pcs
50x32x25

MA 901/XX-2 31

10590021

Tango Square Double



White - Beyaz
Gu10 - Gu5.3
W/G:172x86mm - H/Y:60mm
Ø70mmx2 (CTC is 90mm)
25 pcs
50x32x25

MA 901/XX-2 42

10590021

Tango Square Double




Black - Siyah
Gu10 - Gu5.3
W/G:172x86mm - H/Y:60mm
Ø70mmx2 (CTC is 90mm)
25 pcs
50x32x25

MA 911/XX/YY 42

10590011

Tango Ganna Square

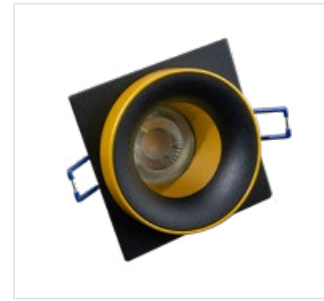


Black - Siyah
Gu10 - Gu5.3
W/G:87x87mm - H/Y:85mm
Ø70mm
80 pcs
50x32x25

MA 911/XX/YY-2 31

10590211

Tango Ganna Square Double

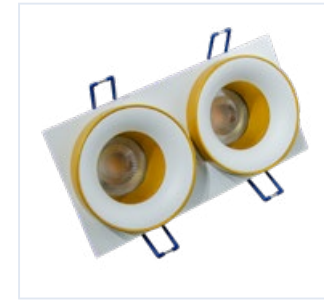


White - Beyaz
Gu10 - Gu5.3
W/G:172x86mm - H/Y:85mm
Ø70mmx2 (CTC is 90mm)
25 pcs
50x32x25

MA 911/XX/YY-2 42

10590211

Tango Ganna Square Double

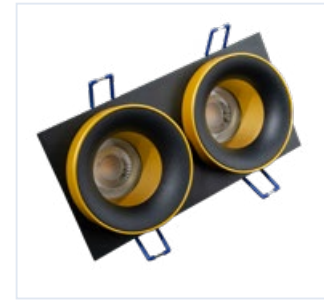


Black - Siyah
Gu10 - Gu5.3
W/G:118mm - H/Y:55mm
Ø70mmx2 (CTC is 90mm)
25 pcs
50x32x25

MA 903/XX 31

10590003

Tango V2

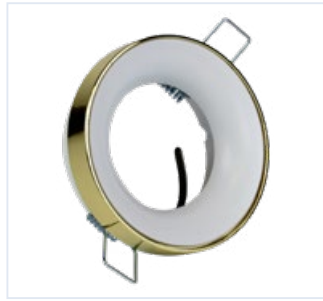

White - Beyaz
Gu10 - Gu5.3
W/G:80mm - H/Y:60mm
Ø70mm
80 pcs
50x32x25

MA 903/XX 42

10590003

Tango V2



Black - Siyah
Gu10 - Gu5.3
W/G:80mm - H/Y:60mm
Ø70mm
80 pcs
50x32x25

Ring Colors*Bilezik Renkleri*

- Chrome - Krom
- Copper - Bakır
- Gold - Altın
- Black - Siyah
- White - Beyaz

MA 912/XX/YY 31

10590012

Tango Ganna V2



White - Beyaz
Gu10 - Gu5.3
W/G:80mm - H/Y:85mm
Ø70mm
80 pcs
50x32x25

MA 912/XX/YY 42

10590012

Tango Ganna V2



Black - Siyah
Gu10 - Gu5.3
W/G:80mm - H/Y:85mm
Ø70mm
80 pcs
50x32x25

MA 921/31 31

10592100

Hefta Tango



White - Beyaz
Gu10 - Gu5.3
W/G:80mm - H/Y:50mm
Ø70mm
80 pcs
50x32x25

MA 921/42 42

10592100

Hefta Tango



Black - Siyah
Gu10 - Gu5.3
W/G:80mm - H/Y:50mm
Ø70mm
80 pcs
50x32x25

MA 921/61 31

10592100

Hefta Tango



White - Beyaz + Gold Ring
Gu10 - Gu5.3
W/G:80mm - H/Y:50mm
Ø70mm
80 pcs
50x32x25

MA 810-51/61 42

10581051

Versa Tango



Black - Siyah + Gold Ring
Gu10 - Gu5.3
W/G:90mm - H/Y:60mm
Ø75m
50 pcs
50x32x25

MA 810-51/61 61

10581051

Versa Tango



Gold - Altın + Gold Ring
Gu10 - Gu5.3
W/G:90mm - H/Y:60mm
Ø75m
50 pcs
50x32x25

MA 921/61 42

10592100

Hefta Tango



Black - Siyah + Gold Ring
Gu10 - Gu5.3
W/G:80mm - H/Y:50mm
Ø70mm
80 pcs
50x32x25

MA 921/61 61

10592100

Hefta Tango



Gold - Altın + Gold Ring
Gu10 - Gu5.3
W/G:90mm - H/Y:50mm
Ø75m
50 pcs
50x32x25

MA 810-51/31 31

10581051

Versa Tango



White - Beyaz
Gu10 - Gu5.3
W/G:90mm - H/Y:60mm
Ø75m
50 pcs
50x32x25



- Suitable for low depth ceiling

MA 810-51/42 42

10581051

Versa Tango



Black - Siyah
Gu10 - Gu5.3
W/G:90mm - H/Y:60mm
Ø75m
50 pcs
50x32x25

MA 810-51/61 31

10581051

Versa Tango



White - Beyaz + Gold Ring
Gu10 - Gu5.3
W/G:90mm - H/Y:60mm
Ø75m
50 pcs
50x32x25

Ring Colors*Bilezik Renkleri*

- Chrome - Krom
- Copper - Bakır
- Gold - Altın
- Black - Siyah
- White - Beyaz

MA 88-080/6 31

10588080

Tango Big



White - Beyaz
Gu10 - Gu5.3
W/G:117mm - H/Y:90mm
Ø105mm
40 pcs
50x32x25

MA 88-080/5 42

10588080

Tango Big



Black - Siyah
Gu10 - Gu5.3
W/G:117mm - H/Y:90mm
Ø105mm
40 pcs
50x32x25

MA 88-080/3 61 31

10588080

Tango Big



White - Beyaz + Gold Ring + GD
Gu10 - Gu5.3
W/G:117mm - H/Y:90mm
Ø105mm
40 pcs
50x32x25

MA 88-080/5 61 42

10588080

Tango Big



Black - Siyah + Gold Ring + BK
Gu10 - Gu5.3
W/G:117mm - H/Y:90mm
Ø105mm
40 pcs
50x32x25

MA 88-080/6 31 61

10588080

Tango Big



Gold - Altın + White Ring + WT
Gu10 - Gu5.3
W/G:117mm - H/Y:90mm
Ø105mm
40 pcs
50x32x25

MA 88-080/5 42 61


10588080

Tango Big



Gold - Altın + Black Ring + BK
Gu10 - Gu5.3
W/G:117mm - H/Y:90mm
Ø105mm
40 pcs
50x32x25

IT'S TANGO TIME

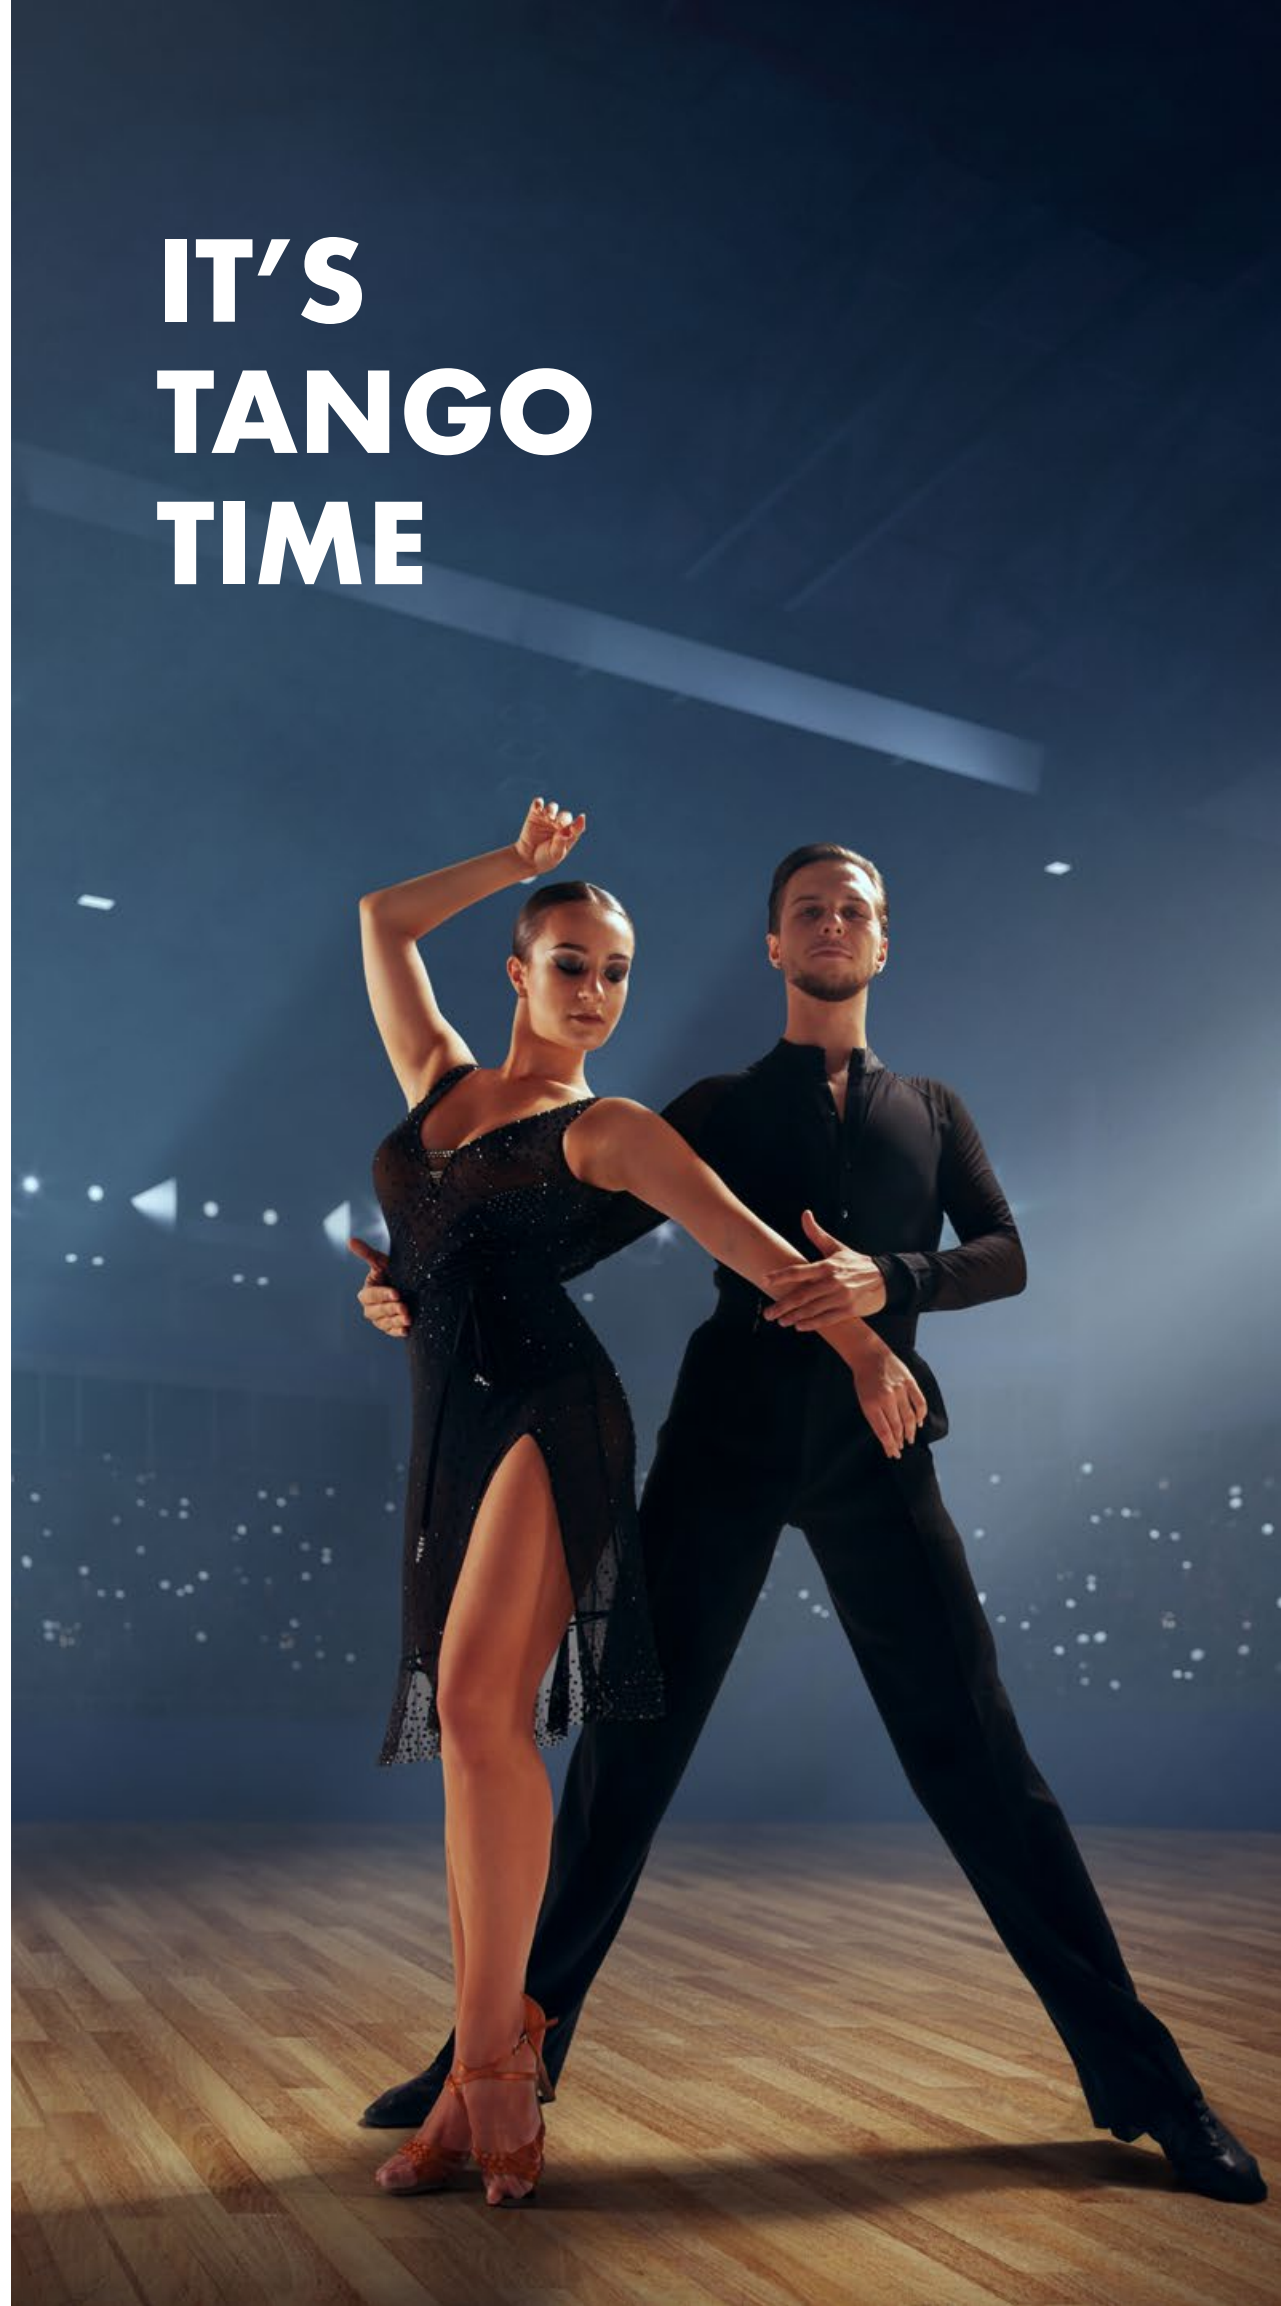


REFLECTO FAMILY

The product prime (PRIME) category provides the product types between a top quality and qualified performance.

- *Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor.
- *Provides the best compromise between an attractive price and qualified housing quality.
- * Focus on high quality material.
- * Excellent finishes and product design.
- * Many body - case - reflector color options.

Typical Applications :

- Houses and offices applications.
- Architectural applications.
- General lighting applications.
- Retail store applications.

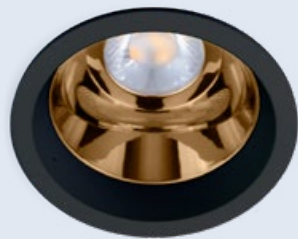

M 200-53/X 31

10520053

Reflecto Round 70



White - Beyaz

Gu10 - Gu5.3

W/G:88mm - H/Y:100mm

Ø80mm

50 pcs

50x32x25

M 200-53/X 42

10520053

Reflecto Round 70



Black - Siyah

Gu10 - Gu5.3

W/G:88mm - H/Y:100mm

Ø80mm

50 pcs

50x32x25

M 200-66/X 31

10520066

Reflecto Round 70 V2



White - Beyaz

Gu10 - Gu5.3

W/G:100mm - H/Y:90mm

Ø80mm

50 pcs

50x32x25

M 200-66/X 42

10520066

Reflecto Round 70 V2



Black - Siyah

Gu10 - Gu5.3

W/G:100mm - H/Y:90mm

Ø80mm

50 pcs

50x32x25

M 200-64/X 31

10520066

Reflecto Square 70 V2



White - Beyaz

Gu10 - Gu5.3

W/G:93mm - H/Y:90mm

Ø80mm

50 pcs

50x32x25

M 200-64/X 42

10520066

Reflecto Square 70 V2



Black - Siyah

Gu10 - Gu5.3

W/G:93mm - H/Y:90mm

Ø80mm

50 pcs

50x32x25

Reflector Colors

Reflektör Renkleri

- Chrome - Krom
- Copper - Bakır
- Gold - Altın
- Platinum - Platin
- Black - Siyah
- White - Beyaz

MA 79-070/X 31

10579070

Reflecto Square 70



White - Beyaz
Gu10 - Gu5.3
W/G:65mm - H/Y:90mm
60x60mm
50 pcs
50x32x25

MA 79-070/X 42

10579070

Reflecto Square 70



Black - Siyah
Gu10 - Gu5.3
W/G:65mm - H/Y:90mm
60x60mm
50 pcs
50x32x25

MA 79-070/X-2 31

10579270

Reflecto Square 70 Double




White - Beyaz
Gu10 - Gu5.3
W/G:120x70mm - H/Y:90mm
60x110mm
25 pcs
50x32x25

MA 78-070/X 31

10578170

Reflecto Square 70-Y

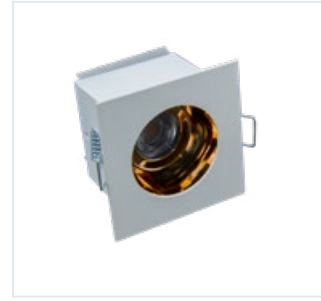

White - Beyaz
Gu10 - Gu5.3
W/G:65mm - H/Y:90mm
60x60mm
50 pcs
50x32x25

MA 78-070/X 42

10578170

Reflecto Square 70-Y



Black - Siyah
Gu10 - Gu5.3
W/G:65mm - H/Y:90mm
60x60mm
50 pcs
50x32x25

MA 78-070/X-2 31

10578270

Reflecto Square Double 70-Y



White - Beyaz
Gu10 - Gu5.3
W/G:120x70mm - H/Y:90mm
60x110mm
25 pcs
50x32x25

MA 79-070/X-2 42

10579270

Reflecto Square 70 Double



Black - Siyah
Gu10 - Gu5.3
W/G:120x70mm - H/Y:90mm
60x110mm
25 pcs
50x32x25

MA 79-070/X-3 31

10579370

Reflecto Square 70 Trio



White - Beyaz
Gu10 - Gu5.3
W/G:170x70mm - H/Y:90mm
60x160mm
15 pcs
50x32x25

MA 79-070/X-3 42

10579370

Reflecto Square 70 Trio



Black - Siyah
Gu10 - Gu5.3
W/G:170x70mm - H/Y:90mm
60x160mm
15 pcs
50x32x25

MA 78-070/X-2 42

10578270

Reflecto Square Double 70-Y



Black - Siyah
Gu10 - Gu5.3
W/G:120x70mm - H/Y:90mm
60x110mm
25 pcs
50x32x25

MA 78-070/X-3 31

10578370

Reflecto Square Trio 70-Y



White - Beyaz
Gu10 - Gu5.3
W/G:170x70mm - H/Y:90mm
60x160mm
15 pcs
50x32x25

MA 78-070/X-3 42

10578370

Reflecto Square Trio 70-Y



Black - Siyah
Gu10 - Gu5.3
W/G:170x70mm - H/Y:90mm
60x160mm
15 pcs
50x32x25

MA 79-090/X 31

10579090

Reflecto Square 90



White - Beyaz
Gu10 - Gu5.3
W/G:86mm - H/Y:90mm
78x78mm
50 pcs
50x32x25

MA 79-090/X 42

10579090

Reflecto Square 90



Black - Siyah
Gu10 - Gu5.3
W/G:86mm - H/Y:90mm
78x78mm
50 pcs
50x32x25

MA 79-090/X-2 31

10579290

Reflecto Square Double 90



White - Beyaz
Gu10 - Gu5.3
W/G:89x157mm - H/Y:90mm
80x145mm
25 pcs
50x32x25

MA 79-090/X-2 42

10579290

Reflecto Square Double 90



Black - Siyah
Gu10 - Gu5.3
W/G:89x157mm - H/Y:90mm
80x145mm
25 pcs
50x32x25

MA 79-080/X 31

10578090

Reflecto Square 90-Y




White - Beyaz
Gu10 - Gu5.3
W/G:86mm - H/Y:90mm
78x78mm
50 pcs
50x32x25

MA 79-080/X 42

10578090

Reflecto Square 90-Y

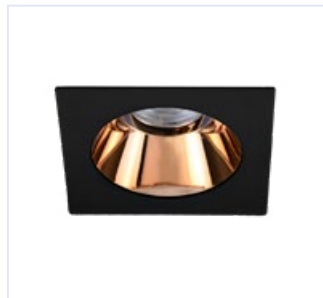


Black - Siyah
Gu10 - Gu5.3
W/G:86mm - H/Y:90mm
78x78mm
50 pcs
50x32x25

MA 79-080/X-2 31

10578290

Reflecto Square Double 90-Y

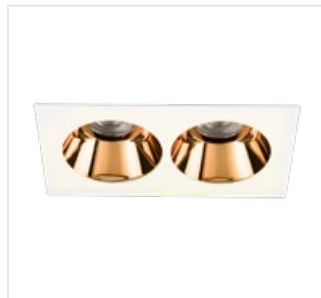


White - Beyaz
Gu10 - Gu5.3
W/G:89x157mm - H/Y:90mm
80x145mm
25 pcs
50x32x25

MA 79-080/X-2 42

10578290

Reflecto Square Double 90-Y

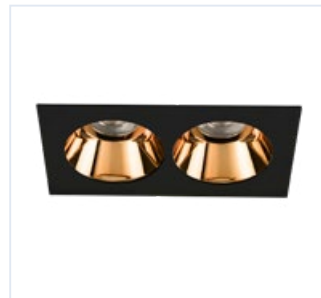

Black - Siyah
Gu10 - Gu5.3
W/G:89x157mm - H/Y:90mm
80x145mm
25 pcs
50x32x25

MA 79-110/X 31

10579110

Reflecto Square 110




White - Beyaz
Gu10 - Gu5.3
W/G:110mm - H/Y:90mm
98mm
50 pcs
50x32x25

MA 79-110/X 42

10579110

Reflecto Square 110

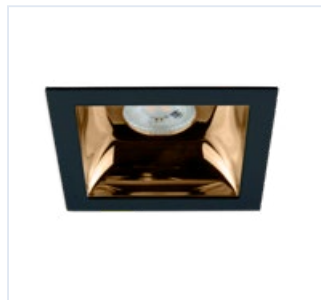

Black - Siyah
Gu10 - Gu5.3
W/G:110mm - H/Y:90mm
98mm
50 pcs
50x32x25




TRIMLESS SPOT CASE

MA 802-50 31

10580250

Verfa Trimless

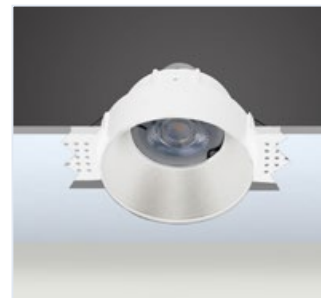


White - Beyaz
Gu10 - Gu5.3
W/G:80mm - H/Y:80mm
Ø85mm
50 pcs
50x32x25

MA 802-50 42

10580250

Verfa Trimless

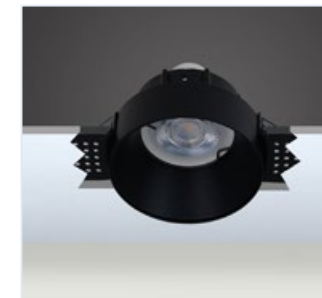

Black - Siyah
Gu10 - Gu5.3
W/G:80mm - H/Y:80mm
Ø85mm
50 pcs
50x32x25

M 200-67/X 31

10520067

Reflecto Round 70 Trimless



White - Beyaz
Gu10 - Gu5.3
W/G:90mm - H/Y:107mm
Ø100mm
50 pcs
50x32x25

M 200-67/X 42

10520067

Reflecto Round 70 Trimless




Black - Siyah
Gu10 - Gu5.3
W/G:90mm - H/Y:107mm
Ø100mm
50 pcs
50x32x25

MA 827-12 01 31

105827121

Luxis Trimless Single

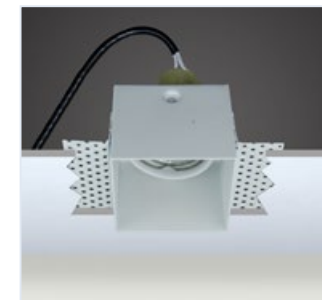


White - Beyaz
Gu10 - Gu5.3
W/G:70mm - H/Y:105mm
75x75mm
50 pcs
50x32x25

MA 827-12 01 42

105827121

Luxis Trimless Single




Black - Siyah
Gu10 - Gu5.3
W/G:70mm - H/Y:105mm
75x75mm
50 pcs
50x32x25

MA 827-12 02 31

105827122

Luxis Trimless Double

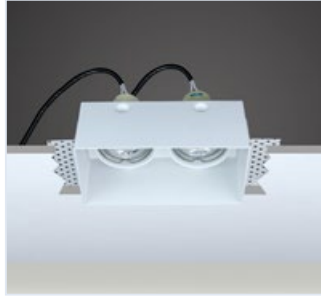

White - Beyaz
Gu10 - Gu5.3
W/G:145x70mm - H/Y:105mm
75x150mm
25 pcs
50x32x25

MA 827-12 02 42

105827122

Luxis Trimless Double



Black - Siyah
Gu10 - Gu5.3
W/G:145x70mm - H/Y:105mm
75x150mm
25 pcs
50x32x25



RECESSED IP65 SPOT CASE

M 200-60 IP65 31

10520060

Sumota Mini IP65




White - Beyaz
Gu10 - Gu5.3
W/G:85mm - H/Y:75mm
Ø70mm
80 pcs
50x32x25

M 200-60 IP65 42

10520060

Sumota Mini IP65

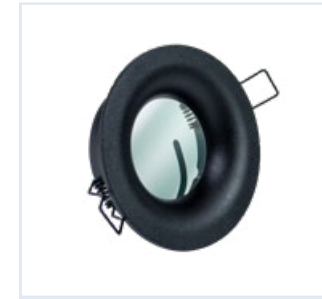

Black - Siyah
Gu10 - Gu5.3
W/G:85mm - H/Y:75mm
Ø70mm
80 pcs
50x32x25

MA 808-50 IP65 31

10580850

Verfa IP65



White - Beyaz
Gu10 - Gu5.3
W/G:93mm - H/Y:90mm
Ø80mm
50 pcs
50x32x25

MA 808-50 IP65 42

10580850

Verfa IP65



Black - Siyah
Gu10 - Gu5.3
W/G:93mm - H/Y:90mm
Ø80mm
50 pcs
50x32x25

LOVEN FAMILY



The product prime (PRIME) category provides the product types between a top quality and qualified performance.

*Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor.

*Provides the best compromise between an attractive price and qualified housing quality.

* Focus on high quality material.

* Excellent finishes and product design.

* Many body - case - reflector color options.

Typical Applications :

- Houses and offices applications.
- Architectural applications.
- General lighting applications.
- Retail store applications.

MSR-121 060 31

13012160

Loven Square Surface



White - Beyaz

Gu10 - Gu5.3

W/G:55mm - H/Y:190mm

25 pcs

50x32x25

MSR-121 060 42

13012160

Loven Square Surface



Black - Siyah

Gu10 - Gu5.3

W/G:55mm - H/Y:190mm

25 pcs

50x32x25

MSR-122 060 31

13012260

Loven Square Double Surface



White - Beyaz

Gu10 - Gu5.3

W/G:70x250mm - H/Y:190mm

25 pcs

50x32x25

MSR-122 060 42

13012260

Loven Square Double Surface



White - Beyaz

Gu10 - Gu5.3

W/G:70x250mm - H/Y:190mm

25 pcs

50x32x25

MSR-123 060 31

13012360

Loven Square Trio Surface



White - Beyaz

Gu10 - Gu5.3

W/G:70x400mm - H/Y:190mm

15 pcs

50x32x25

MSR-123 060 42

13012360

Loven Square Trio Surface



Black - Siyah

Gu10 - Gu5.3

W/G:70x400mm - H/Y:190mm

15 pcs

50x32x25

MSR-124 060 31

13012460

Loven Square Quad Surface



White - Beyaz

Gu10 - Gu5.3

W/G:70x550mm - H/Y:190mm

1 pcs

50x32x25

MSR-124 060 42

13012460

Loven Square Quad Surface



Black - Siyah

Gu10 - Gu5.3

W/G:70x550mm - H/Y:190mm

1 pcs

50x32x25

MSY-128 060 31

10512860

Loven Round Surface



White - Beyaz
Gu10 - Gu5.3
W/G:55mm - H/Y:190mm
25 pcs
50x32x25

MSY-128 060 42

10512860

Loven Round Surface



Black - Siyah
Gu10 - Gu5.3
W/G:55mm - H/Y:190mm
25 pcs
50x32x25

MARS-144 060 31

10514460

Loven Semi Recessed



White - Beyaz
Gu10 - Gu5.3
W/G:55mm - H/Y:157mm
Ø50mm
40 pcs
50x32x25

MARS-144 060 42

10514460

Loven Semi Recessed



Black - Siyah
Gu10 - Gu5.3
W/G:55mm - H/Y:157mm
Ø50mm
40 pcs
50x32x25

MRS-44 060 31

12500144

Loven Track



White - Beyaz
Gu10 - Gu5.3
W/G:55mm - H/Y:170mm
25 pcs
50x32x25

MRS-44 060 42

12500144


Loven Track



Black - Siyah
Gu10 - Gu5.3
W/G:55mm - H/Y:170mm
25 pcs
50x32x25



NELSON FAMILY

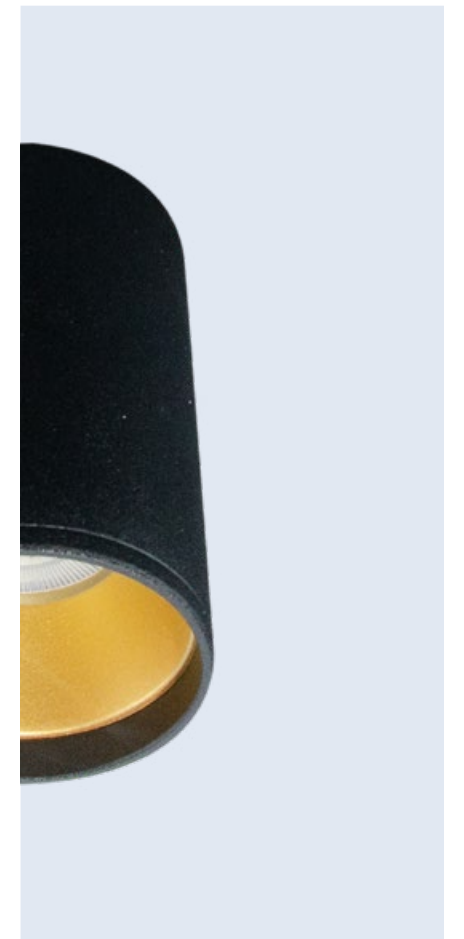

The product prime (PRIME) category provides the product types between a top quality and qualified performance.

- * Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor.
- * Provides the best compromise between an attractive price and qualified housing quality.
- * Focus on high quality material.
- * Excellent finishes and product design.
- * Many body - case - reflector color options.

Typical Applications :

- Houses and offices applications.
- Architectural applications.
- General lighting applications.
- Retail store applications.

MSY-101 060/X 31

13010160

Nelson 60 Surface



White - Beyaz

Gu10 - Gu5.3

W/G:60mm - H/Y:100mm

20 pcs

50x32x25

MSY-101 060/X 42

13010160

Nelson 60 Surface



Black - Siyah

Gu10 - Gu5.3

W/G:60mm - H/Y:100mm

20 pcs

50x32x25

MSY-102 060/X 31

13010260

Nelson 60 Surface Adjustable



White - Beyaz

Gu10 - Gu5.3

W/G:60mm - H/Y:130mm

20 pcs

50x32x25

MSYD-33 060/X-2 31

16132260

Nelson 60 Double Wall



White - Beyaz

Gu10 - Gu5.3

W/G:60mm - H/Y:160mm

15 pcs

50x32x25

MSYD-33 060/X-2 42

16132260

Nelson 60 Double Wall



Black - Siyah

Gu10 - Gu5.3

W/G:60mm - H/Y:160mm

15 pcs

50x32x25

MSY-102 060/X 42

13010260

Nelson 60 Surface Adjustable



Black - Siyah

Gu10 - Gu5.3

W/G:60mm - H/Y:130mm

20 pcs

50x32x25

MRS-94 060/X 31

12594060

Nelson 60 Track



White - Beyaz

Gu10 - Gu5.3

W/G:60mm - H/Y:130mm

20 pcs

50x32x25

MRS-94 060/X 42

12594060

Nelson 60 Track



Black - Siyah

Gu10 - Gu5.3

W/G:60mm - H/Y:130mm

20 pcs

50x32x25

**MSYD-32 060/X 31**

16132060

Nelson 60 Single Wall



White - Beyaz

Gu10 - Gu5.3

W/G:60mm - H/Y:130mm

20 pcs

50x32x25

MSYD-32 060/X 32

16132060

Nelson 60 Single Wall



Black - Siyah

Gu10 - Gu5.3

W/G:60mm - H/Y:130mm

20 pcs

50x32x25



The product prime (PRIME) category provides the product types between a top quality and qualified performance.

*Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor.

*Provides the best compromise between an attractive price and qualified housing quality.

* Focus on high quality material.

* Excellent finishes and product design.

* Many body - case - reflector color options.

Typical Applications :

- Houses and offices applications.
- Architectural applications.
- General lighting applications.
- Retail store applications.



SURFACE MOUNTED SPOT CASE

MSY-71 055 31

13005571

Messe Surface Short



White - Beyaz
Gu10 - Gu5.3
W/G:55mm - H/Y:150mm
25 pcs
50x32x25

MSY-71 055 42

13005571

Messe Surface Short



Black - Siyah
Gu10 - Gu5.3
W/G:55mm - H/Y:150mm
25 pcs
50x32x25

MSY-10 055 31

13005510

Messe 055



White - Beyaz
Gu10 - Gu5.3
W/G:55mm - H/Y:100mm
25 pcs
50x32x25

MSR-15-1 31

13010151

Antverp Single



White - Beyaz
Gu10 - Gu5.3
W/G:110x85mm - H/Y:150mm
20 pcs
50x32x25

MSR-15-1 42

13010151

Antverp Single



Black - Siyah
Gu10 - Gu5.3
W/G:110x85mm - H/Y:150mm
20 pcs
50x32x25

MSR-15-2 31

13010152

Antverp Double



White - Beyaz
Gu10 - Gu5.3
W/G:220x85mm - H/Y:150mm
15 pcs
50x32x25

MSY-10 055 42

13005510

Messe 055



Black - Siyah
Gu10 - Gu5.3
W/G:55mm - H/Y:100mm
25 pcs
50x32x25

MSY-95 080 31

13008005

Sumota V2 Surface



White - Beyaz
Gu10 - Gu5.3
W/G:80mm - H/Y:100mm
25 pcs
50x32x25

MSY-95 080 42

13008005

Sumota V2 Surface



Black - Siyah
Gu10 - Gu5.3
W/G:80mm - H/Y:100mm
25 pcs
50x32x25

MSR-15-2 42

13010152

Antverp Double



Black - Siyah
Gu10 - Gu5.3
W/G:220x85mm - H/Y:150mm
15 pcs
50x32x25

MSY-77 31

13000177

Coffee Surface



White - Beyaz
Gu10 - Gu5.3
W/G:60mm - H/Y:140mm
25 pcs
50x32x25

MSY-77 42

13000177

Coffee Surface



Black - Siyah
Gu10 - Gu5.3
W/G:60mm - H/Y:140mm
25 pcs
50x32x25

MSY-79 080 31

13008079

Eleni Fixed Surface



White - Beyaz
Gu10 - Gu5.3
W/G:80mm - H/Y:100mm
25 pcs
50x32x25

MSY-79 080 42

13008079

Eleni Fixed Surface



Black - Siyah
Gu10 - Gu5.3
W/G:80mm - H/Y:100mm
25 pcs
50x32x25

MSK-35 070 31

10507035

Messe Surface Square 70



White - Beyaz
Gu10 - Gu5.3
W/G:71mm - H/Y:135mm
25 pcs
50x32x25

MSK-35 070 42

10507035

Messe Surface Square 70



Black - Siyah
Gu10 - Gu5.3
W/G:71mm - H/Y:135mm
25 pcs
50x32x25

MSY-88 090 31

10509088

Eleni Adjustable Surface



White - Beyaz
Gu10 - Gu5.3
W/G:90mm - H/Y:90mm
25 pcs
50x32x25

MSY-88 090 42

10509088

Eleni Adjustable Surface



Black - Siyah
Gu10 - Gu5.3
W/G:90mm - H/Y:90mm
25 pcs
50x32x25

MSY-94/X 090 31

10509094

Draco Surface



White - Beyaz
Gu10 - Gu5.3
W/G:90mm - H/Y:90mm
25 pcs
50x32x25

MSY-66/X 31

13009066

Reflecto Round Surface 90




White - Beyaz
Gu10 - Gu5.3
W/G:90mm - H/Y:100mm
30 pcs
50x32x25

MSY-66/X 31

13009066

Reflecto Round Surface 90

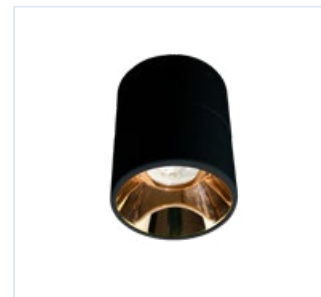

Black - Siyah
Gu10 - Gu5.3
W/G:90mm - H/Y:100mm
30 pcs
50x32x25

MSK-35/X 055 31

13005535

Reflecto Square Surface 55



White - Beyaz
Gu10 - Gu5.3
W/G:55mm - H/Y:110mm
30 pcs
50x32x25

MSY-94/X 090 42

10509094

Drace Surface



Black - Siyah
Gu10 - Gu5.3
W/G:90mm - H/Y:90mm
25 pcs
50x32x25

MSY-70/X 31

13005570

Reflecto Round Surface 55



White - Beyaz
Gu10 - Gu5.3
W/G:55mm - H/Y:100mm
25 pcs
50x32x25

MSY-70/X 42

13005570

Reflecto Round Surface 55



Black - Siyah
Gu10 - Gu5.3
W/G:55mm - H/Y:100mm
25 pcs
50x32x25

MSK-35/X 055 42

13005535

Reflecto Square Surface 55



Black - Siyah
Gu10 - Gu5.3
W/G:55mm - H/Y:110mm
30 pcs
50x32x25

MSK-33/X 075 31

13007535

Reflecto Square Surface 75



White - Beyaz
Gu10 - Gu5.3
W/G:75mm - H/Y:110mm
30 pcs
50x32x25

MSK-33/X 075 42

13007535

Reflecto Square Surface 75



Black - Siyah
Gu10 - Gu5.3
W/G:75mm - H/Y:110mm
30 pcs
50x32x25

MSY-65/X 31

13007065

Reflecto Round Surface 70




White - Beyaz
Gu10 - Gu5.3
W/G:70mm - H/Y:100mm
30 pcs
50x32x25

MSY-65/X 42

13007065

Reflecto Round Surface 70

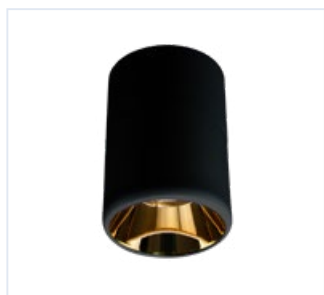

Black - Siyah
Gu10 - Gu5.3
W/G:70mm - H/Y:100mm
30 pcs
50x32x25

MSK-34/X 095 31

13009534

Reflecto Square Surface 95



White - Beyaz
Gu10 - Gu5.3
W/G:95mm - H/Y:110mm
25 pcs
50x32x25

MSK-34/X 095 42

13009534

Reflecto Square Surface 95



Black - Siyah
Gu10 - Gu5.3
W/G:95mm - H/Y:110mm
25 pcs
50x32x25

MSK-34-2/X 095 31

130095342

Reflecto Dbl Square Surface 95



White - Beyaz

Gu10 - Gu5.3

W/G:185x95mm - H/Y:110mm

15 pcs

50x32x25

MSK-34-2/X 095 42

130095342

Reflecto Dbl Square Surface 95



Black - Siyah

Gu10 - Gu5.3

W/G:185x95mm - H/Y:110mm

15 pcs

50x32x25

WALL LIGHT SPOT CASE



The product prime (PRIME) category provides the product types between a top quality and qualified performance.

*Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor.

*Provides the best compromise between an attractive price and qualified housing quality.

* Focus on high quality material.

* Excellent finishes and product design.

* Many body - case - reflector color options.

Typical Applications :

- Houses and offices applications.
- Architectural applications.
- General lighting applications.
- Retail store applications.

MSYD-20 055 31

16005520

Messe Mini Wall



White - Beyaz

Gu10 - Gu5.3

W/G:55mm - H/Y:100mm

20 pcs

50x32x25

MSYD-20 055 42

16005520

Messe Mini Wall



Black - Siyah

Gu10 - Gu5.3

W/G:55mm - H/Y:100mm

20 pcs

50x32x25

MSYD-24 055 31

16005524

Messe Double Wall



White - Beyaz

Gu10 - Gu5.3

W/G:55mm - H/Y:140mm

15 pcs

50x32x25

MSYD-24 055 42

16005524

Messe Double Wall



Black - Siyah

Gu10 - Gu5.3

W/G:55mm - H/Y:140mm

15 pcs

50x32x25

TRACK MOUNTED SPOT CASE



The product prime (PRIME) category provides the product types between a top quality and qualified performance.

*Prime series provides spot cases particularly suitable for Gu10 - Gu5.3 bulb for indoor and outdoor.

*Provides the best compromise between an attractive price and qualified housing quality.

* Focus on high quality material.

* Excellent finishes and product design.

* Many body - case - reflector color options.

Typical Applications :

- Houses and offices applications.
- Architectural applications.
- General lighting applications.
- Retail store applications.

MRS-37 31

12500137

Messe Track V1



White - Beyaz
Gu10 - Gu5.3
W/G:55mm - H/Y:110mm
Monophase - Monofaze
50 pcs
50x32x25

MRS-37 42

12500137

Messe Track V1



Black - Siyah
Gu10 - Gu5.3
W/G:55mm - H/Y:110mm
Monophase - Monofaze
50 pcs
50x32x25

MRS-79 31

12500179

Messe Track V3



White - Beyaz
Gu10 - Gu5.3
W/G:55mm - H/Y:100mm
Monophase - Monofaze
50 pcs
50x32x25

MRS-79 42

12500179

Messe Track V3



Black - Siyah
Gu10 - Gu5.3
W/G:55mm - H/Y:100mm
Monophase - Monofaze
50 pcs
50x32x25

MRS-77 31

12500177

Coffee Track



White - Beyaz
Gu10 - Gu5.3
W/G:60mm - H/Y:125mm
Monophase - Monofaze
50 pcs
50x32x25

MRS-77 42

12500177

Coffee Track



Black - Siyah
Gu10 - Gu5.3
W/G:60mm - H/Y:125mm
Monophase - Monofaze
50 pcs
50x32x25

MRS-57/X 42

12500157

Reflecto V2 Gu10 Track



Black - Siyah
Gu10 - Gu5.3
W/G:70mm - H/Y:150mm
Monophase - Monofaze
25 pcs
50x32x25

MRS-57/X 31

12500157

Reflecto V2 Gu10 Track



White - Beyaz
Gu10 - Gu5.3
W/G:70mm - H/Y:150mm
Monophase - Monofaze
25 pcs
50x32x25

OUTDOOR PRODUCTS

**MBA-01 31**

16400001

Spike Mini



White - Beyaz
Gu10 - Gu5.3
IP65
15 pcs
50x32x25

MBA-01 42

16400001

Spike Mini



Black - Siyah
Gu10 - Gu5.3
IP65
15 pcs
50x32x25

MB-42 GU10 42

16500042

Enza Gu10 Bollard



Black - Siyah
Gu10 - Gu5.3
IP66
1 pcs

MB-42 GU10 41

16500042

Enza Gu10 Bollard




Antrachite - Antrasit
Gu10 - Gu5.3
IP66
1 pcs

Features


- + Tool-free changable bulb
- + Future Proof
- + IP66
- + %99 UV protected acrylic glass
- + Customizable height


Enza GU10 BOLLARD

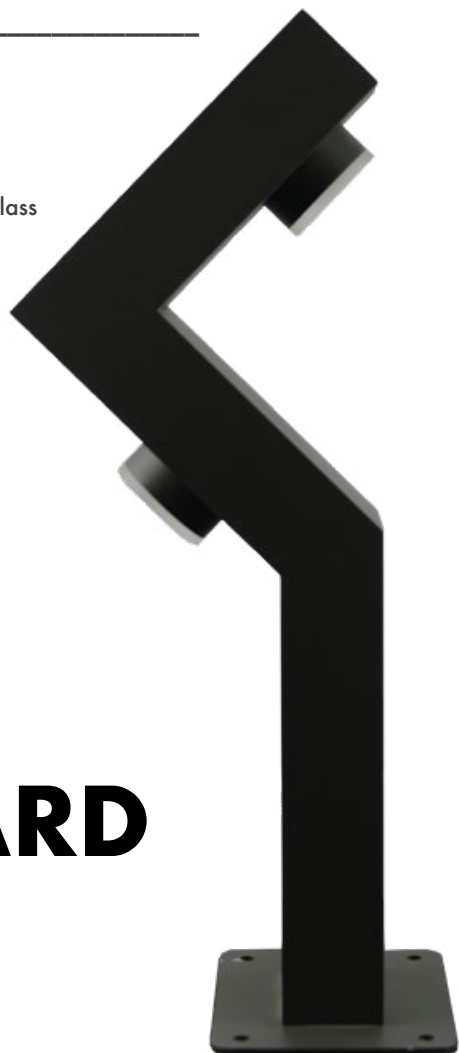

Tool-free changable bulb

Technical Drawing

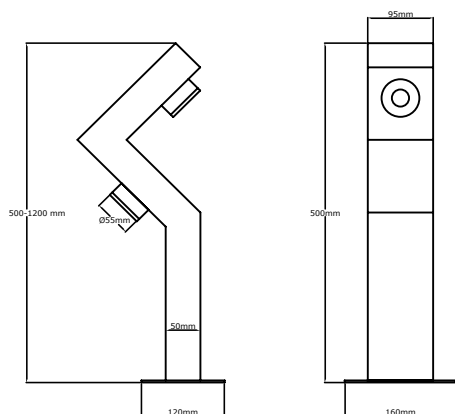



Ral 9003 Signal White
Metsan 01



Ral 9005 Jet Black
Metsan 02



Ral 9006 White Aluminium Gri
Metsan 03



Ral 2121 Orange Turuncu
Metsan 04



Ral 4005 Purple Mor
Metsan 09



Ral 4010 Pink Pembe
Metsan 10



Ral 6018 Grass Green Çim Yeşili
Metsan 11




Ral 5015 Blue Mavi
Metsan 25




Ral 3020 Red Kırmızı
Metsan 26



Ral 6034 Turquoise Turkuaz
Metsan 29



Ral 9010 Creamy White Krem
Metsan 30




Ral 9016 Rought White Dokulu White
Metsan 31



Standard White Body Color
Metsan 31




Standard Black Body Color
Metsan 42



Ral 9005 Matte Black
Mat Black

Metsan 33



Ral 9006 Silverly Black
Simli Black

Metsan 34



Ral 1290 Chrome Satin 2
Chrome Satin 2

Metsan 35



Ral 2004 Orange 2
Turuncu 2

Metsan 36



Ral 1018 Yellow
Sari

Metsan 37



Ral 5010 Dark Blue
Gece Mavisi

Metsan 38



Ral 8024 Brown
Kahverengi

Metsan 40




Ral 7022 Rought Antrasit
Dokulu Antrasit

Metsan 41



Ral 9005 Rought Black
Dokulu Black

Metsan 42



Ral 1013 Beige
Bej

Metsan 43



Ral 7044 Light Gray
Açık Gri

Metsan 44



Ral 1019 Light Brown
Sütlü Kahve

Metsan 47



Chrome
Chrome

Metsan 05



Gold
Altın

Metsan 06



Chrome Satin
Chrome Satin

Metsan 07



Gold Satin
Gold Satin

Metsan 08



Chrome Patina
Chrome Eskitme

Metsan 12



Gold Patina
Altın Eskitme

Metsan 13



Cooper Patina
Bakır Eskitme

Metsan 14



Platin
Platin

Metsan 15



Copper
Bakır

Metsan 17

METSAN QUICK CONNECT SYSTEM

1. Easy & Fast Installation


- Plug-and-play design allows for quick connection and disconnection without specialized tools.
- Reduces labor time and installation complexity.

2. Secure & Reliable Connection

- The "click" locking mechanism ensures a firm and stable connection, reducing the risk of loose wiring.
- Minimizes electrical failures caused by poor connections.

3. Enhanced Safety

- Reduces the risk of exposed wires, making it a safer option in demanding environments.
- Often features waterproof or dustproof ratings, making it suitable for outdoor or harsh conditions.

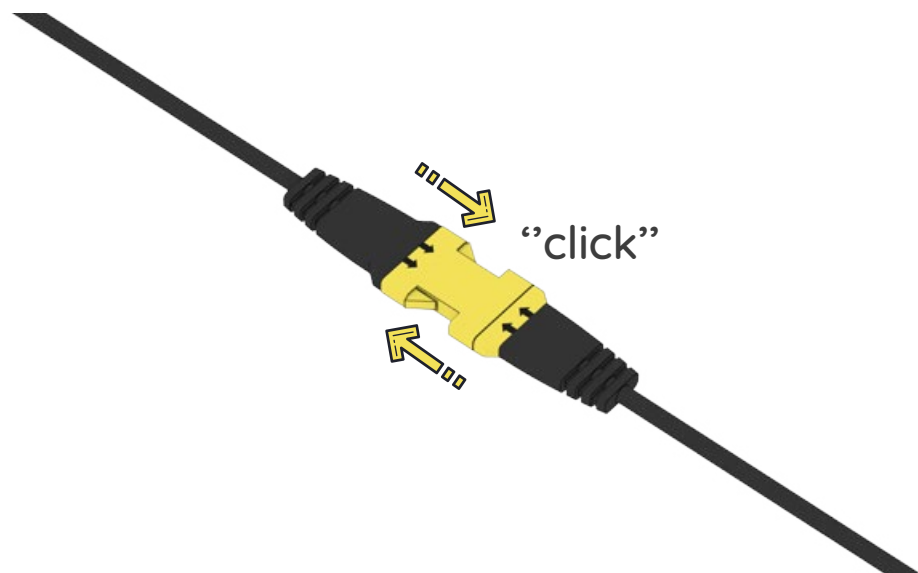

THROUGH WIRING SYSTEM

A Through Wiring System is an electrical wiring method that allows multiple light fixtures to be connected in series using a single power supply line. This system simplifies installation and reduces the amount of cabling required for a project.

How It Works:

1. Continuous Power Flow: Instead of running separate power cables to each fixture, the wiring is passed through each fixture, enabling a continuous electrical connection.


2. Pre-Wired Luminaires: Fixtures come with built-in wiring terminals, allowing quick and easy connection between units.

3. Reduced Installation Time: Since fewer cables are needed, electricians spend less time on installation.

4. Neat and Organized Wiring: Helps maintain a cleaner and more structured electrical setup, especially in large-scale lighting projects.

Benefits of Metsan's Through Wiring System:

- Faster installation with less effort
- Cost-efficient due to reduced cabling
- More reliable connections, minimizing potential faults
- Ideal for large projects such as commercial buildings, warehouses, and industrial facilities

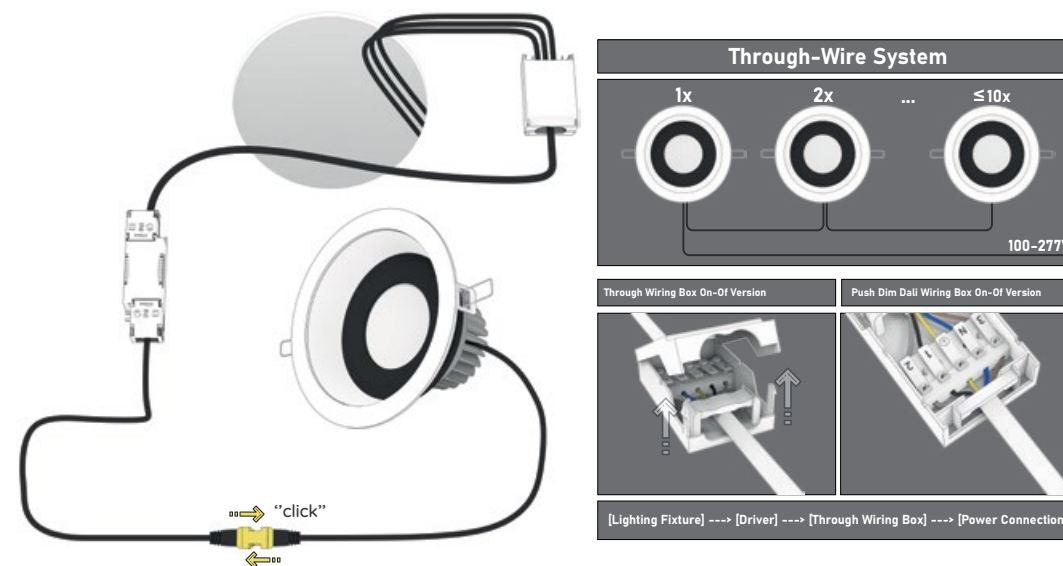

METSAN TRI-CCT DRIVER

Tri-CCT lighting products offer three selectable Correlated Color Temperatures (CCT) in a single fixture, usually 2700K (Warm White), 4000K (Neutral White), and 6500K (Cool White). These lights provide flexibility, efficiency, and convenience in various applications.

1. Versatility & Customization

- Allows users to select the most suitable color temperature for their environment.
- Warm White (2700K): Creates a cozy and relaxing atmosphere, ideal for homes, restaurants, and hospitality.
- Neutral White (4000K): Balanced lighting, perfect for offices, retail, and schools.
- Cool White (6500K): Enhances focus and alertness, suitable for hospitals, warehouses, and workspaces.

2. Simplifies Inventory & Installation


- One fixture with three options eliminates the need to stock multiple SKUs, reducing inventory costs.
- Easy installation—electricians can adjust the CCT on-site using a switch, ensuring the right lighting for the space.

3. Adaptability for Different Applications

- Ideal for residential, commercial, industrial, and healthcare settings.
- Perfect for multi-purpose spaces where lighting needs may change over time.

4. Supports Well-Being & Comfort

- Offers better lighting control, supporting human circadian rhythms.
- Warmer tones for relaxation, cooler tones for productivity and alertness.

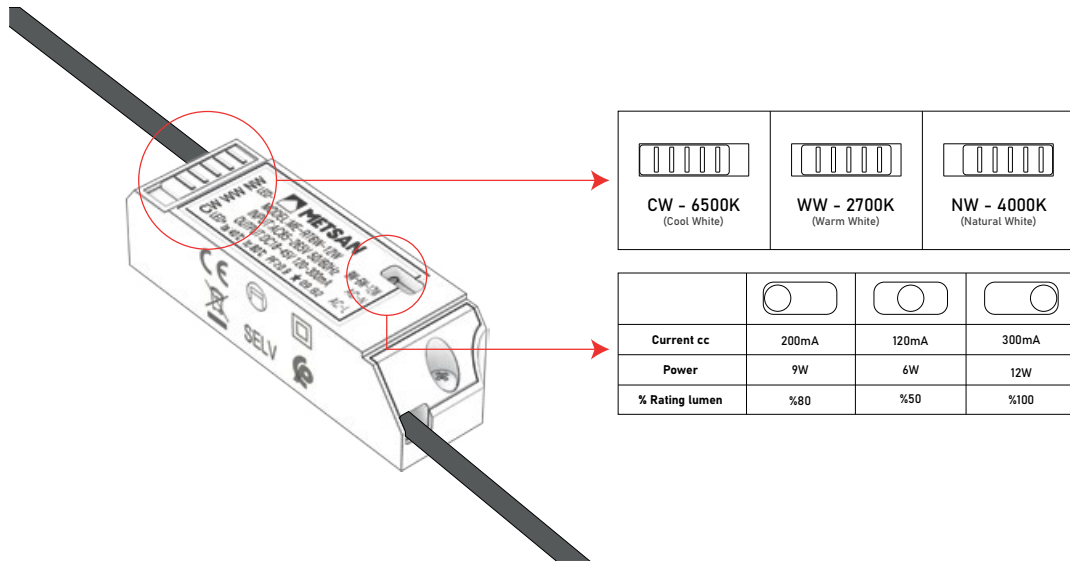

www.
metsanlighting
.com



Merkez / Head Office:
Ömerli Mh. Özçınar Sk. No:22 Hadımköy
Arnavutköy / Istanbul / TURKEY
T. +90 212 798 35 35
F. +90 212 798 35 36

Satış Mağazası / Showroom:
Okçumusa Cd. İpek Çıkmaşı
Alkan İş Hanı No:2/1
Karaköy / Istanbul - TURKEY
T. +90 212 249 78 12 / F. +90 212 243 09 13

[WhatsApp Quick Info:](#)

Yurt İçi / Domestic Team
Istanbul Rep. +90 553 962 41 42
Istanbul Rep 2. +90 507 315 19 95

Yurt Dışı / Export Team
Export Rep. +90 554 984 11 10
Export Rep 2. +90 553 445 63 33

/metsanlighting



METSAN has been manufacturing
at its factory in Istanbul since 1982.

ABOUT METSAN

With partners in more than 28 countries and business activities in more than 55 countries, METSAN is one of the existing largest lighting fixture model with its portfolio in the world. METSAN offers a wide ranging assortment of LED luminaires as well as with spot cases for led bulbs for indoor lighting. We focus high quality items for all product ranges.

METSAN Turkey Headquarters

Ömerli Mh. Özçınar Sk. No:22 Hadımköy
Arnavutköy / Istanbul / TURKEY
T. +90 212 798 35 35
F. +90 212 798 35 36

metsanlighting.com

